


ASSEMBLY INSTRUCTIONS

ITEM NO: FX-3786-1

1. Shut off main power at circuit breaker before attempting to install fixture
2. Install mounting plate(C) to J-BOX (A) in ceiling using mounting screws(E)
3. Pull the supply wires out of the J-BOX and make proper connections using wire connections(B)
4. Position canopy(F) over mounting plate(C) and thread screw collar loop(G) on the nipple tightly
5. Connect chain(H) to loop (I),Insert threadedbolt(J) and secure with finial (K)
6. Put shade(L) and rubber washer(M) onto metal plate ,secure with socket ring(N)
7. Install recommended Bulb(O), Bulb not included in this package.

**Use Max 60W Edison bulb or
type A bulb (bulbs not
included)**

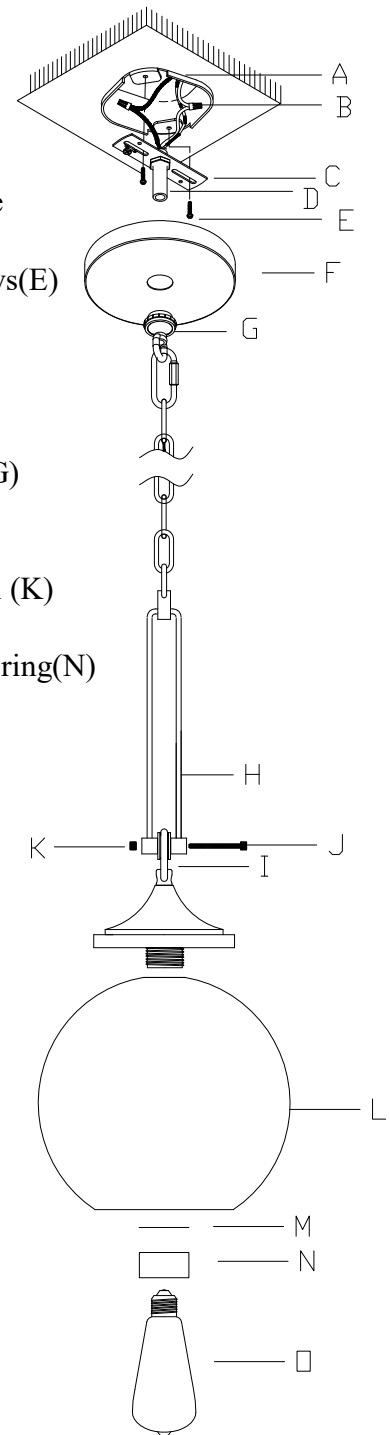

** TO REDUCE THE RISK OF ELECTRIC SHOCK, ALWAYS UNPLUG FROM THE ELECTRICAL OUTLET BEFORE INSTALLATION.*

** THIS FIXTURE IS SUITABLE FOR DRY LOCATION ONLY.*

** THIS FIXTURE SHOULD ONLY BE CLEANED WITH A SOFT LINT FREE CLOTH DAMPLED WITH WATER. DO NOT USE ANY CHEMICAL OR ABUSIVE CLEANER AS THEY MAY DAMAGE THE SURFACE OF THE PRODUCTS.*

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.