ASSEMBLY INSTRUCTIONS


ITEM NO: WL-2930-DB WL-2930-RU WL-2930-BS WL-2930-AB

***** WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.**

*** These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.**

CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE.

1) DRILL 2 HOLES ON THE WALL WITH THE SPACE TO MATCH MOUNTING STRIP (2) AND INSERT PLASTIC ANCHOR (1).
2) INSTALL MOUNTING STRIP (2) TO THE WALL WITH SCREW (3).
3)ATTACH THE BASE OF THE LIGHT (4) TO THE MOUNTING STRIP AND TIGHTEN WITH SIDE SCREW (5).
4)DRILL MORE HOLES ON THE WALL AND THE SPACE OF THE HOLES MUST MATCH THE HOLES ON INNER WIRE COVER (7).
5)INSERT PLASTIC ANCHORS (1) INTO THE HOLES AND INSTALL INNER WIRE COVER TO THE WALL WITH SCREWS (8) AND ALIGN THE WIRE THROUGH IT.
6)PUT THE OUTER WIRE COVER (9) ON INNER WIRE COVER (7).
7)PUT THE SHADE (10) ON THE SOCKET AND TIGHTEN WITH RING (11)
8)INSTALL RECOMMENDED BULB (12) (NOT INCLUDED IN THE PACKAGE).
9)INSERT THE PLUG INTO AN OUTLET.
10)TURN OF THE LIGHT AND ADJUST THE SWIVEL (13) TO DESIRED LOCATION.

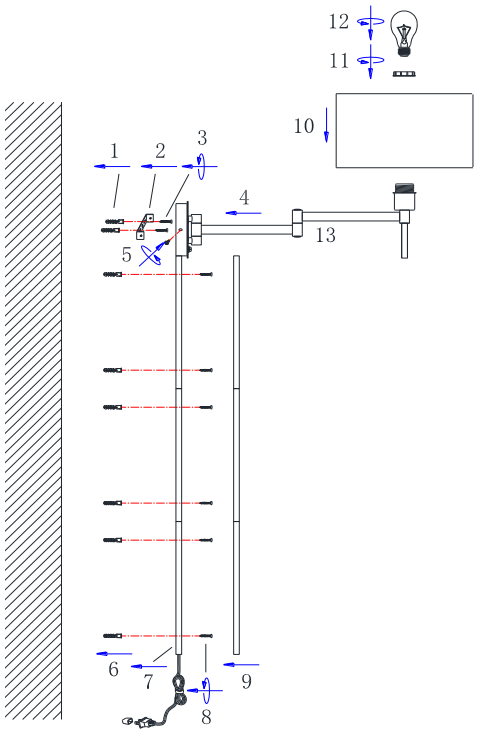

ENJOY YOUR LIGHT!

Use 60 Wattage (Maximum) type A bulb (bulb not included)

IMPORTANT SAFETY INSTRUCTIONS:

THIS LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A SAFETY FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF IT DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS THE PLUG CAN BE FULLY AND EASILY INSERTED. DO NOT ATTEMPT TO ALTER THE PLUG.

*** SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE. ***