
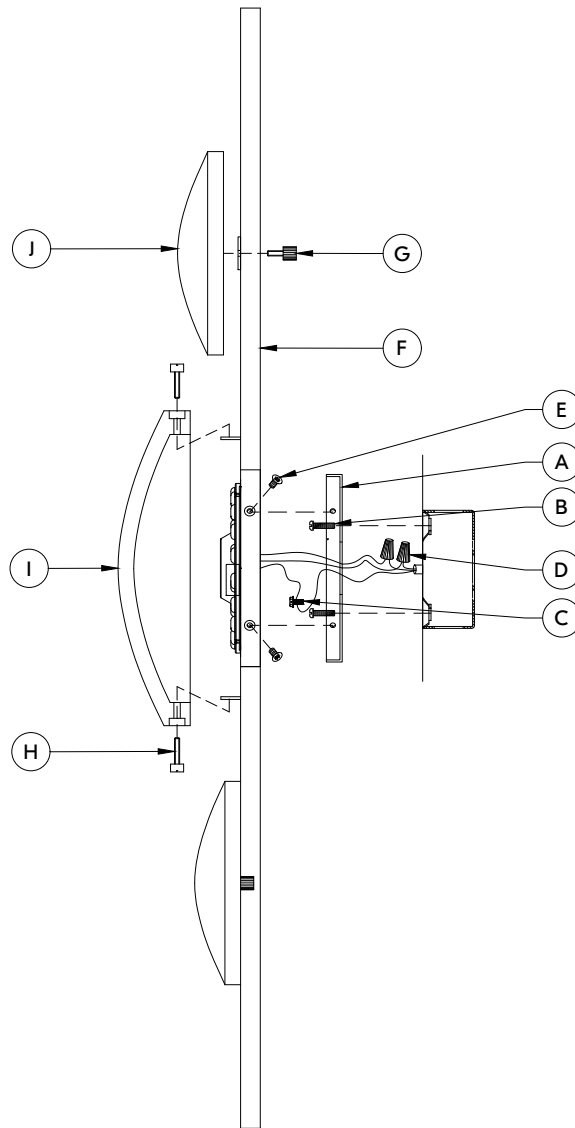


CORBETT

SALISBURY 503-01 Installation Instructions

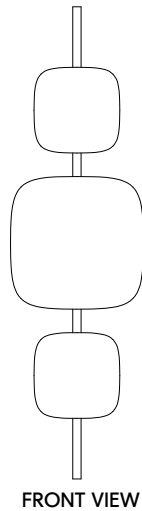

FIXTURE INSTALLATION

1. Attach the MOUNTING PLATE (A) unto the junction box using the MOUNTING SCREWS (B). This fixture is designed to be mounted on standard round or octagon junction box. The junction box must be securely mounted to the structure of the building.
2. Attach the Ground wire (Green) to the ground inside the outlet box (Generally green or bar copper wire) Fasten the wires together with an approved fastener (WIRE NUT) (C). NEVER CONNECT GROUND WIRE TO "HOT" WIRE! FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!
3. Connect the white fixture lead to the neutral (Generally white) wire in the outlet box. Fasten the wires together with an approved fastener (WIRE NUT) (D). Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!
4. Connect the black fixture leads to the hot (Generally black) wire in the junction box. Fasten the joined wires same as previous step. NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!
5. Attach the MARBLE (J) to the FIXTURE ASSEMBLY (WITH LED) (F) and secure with the STUDS B (G).
6. Attach the FIXTURE ASSEMBLY (WITH LED) (F) to the MOUNTING PLATE (A) and secure with the FIXTURE MOUNTING SCREWS (E).
7. Attach the ONYX (I) to the FIXTURE ASSEMBLY (WITH LED) (F) and secure with the STUDS A (H).
8. Restore power to the outlet at the breaker or fuse box.

PART(S)	REPLACEMENT PART NAME	NUMBER
A,B,C,D	HARDWARE KIT	HDW-503-01
E	FIXTURE MOUNTING SCREW	SCR-M
H	STUD A	STD-503-01-A
I	ONYX	ONX-503-01
J	MARBLE	MBL-503-01
G	STUD B	STD-503-01-B