# Three-layer lamp body assembly and installation manual

## 2500G44L3BK



Thank you for choosing our product(s).
Our Company is actively involved in every step of the production.
Our product(s) are designed to be utilized for every application that graces your home or business.
We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.
Please find the enclosed detailed instruction and read carefully for proper installation.
If you have any questions, please contact the retailer Where the purchased was made.

2500G44L3BK

## SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF.BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

## CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are “L” for live wire, “N” for neutral wire, “E” for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

## Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions.
where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

2500G44L3BK

# Frame Assembly Diagram

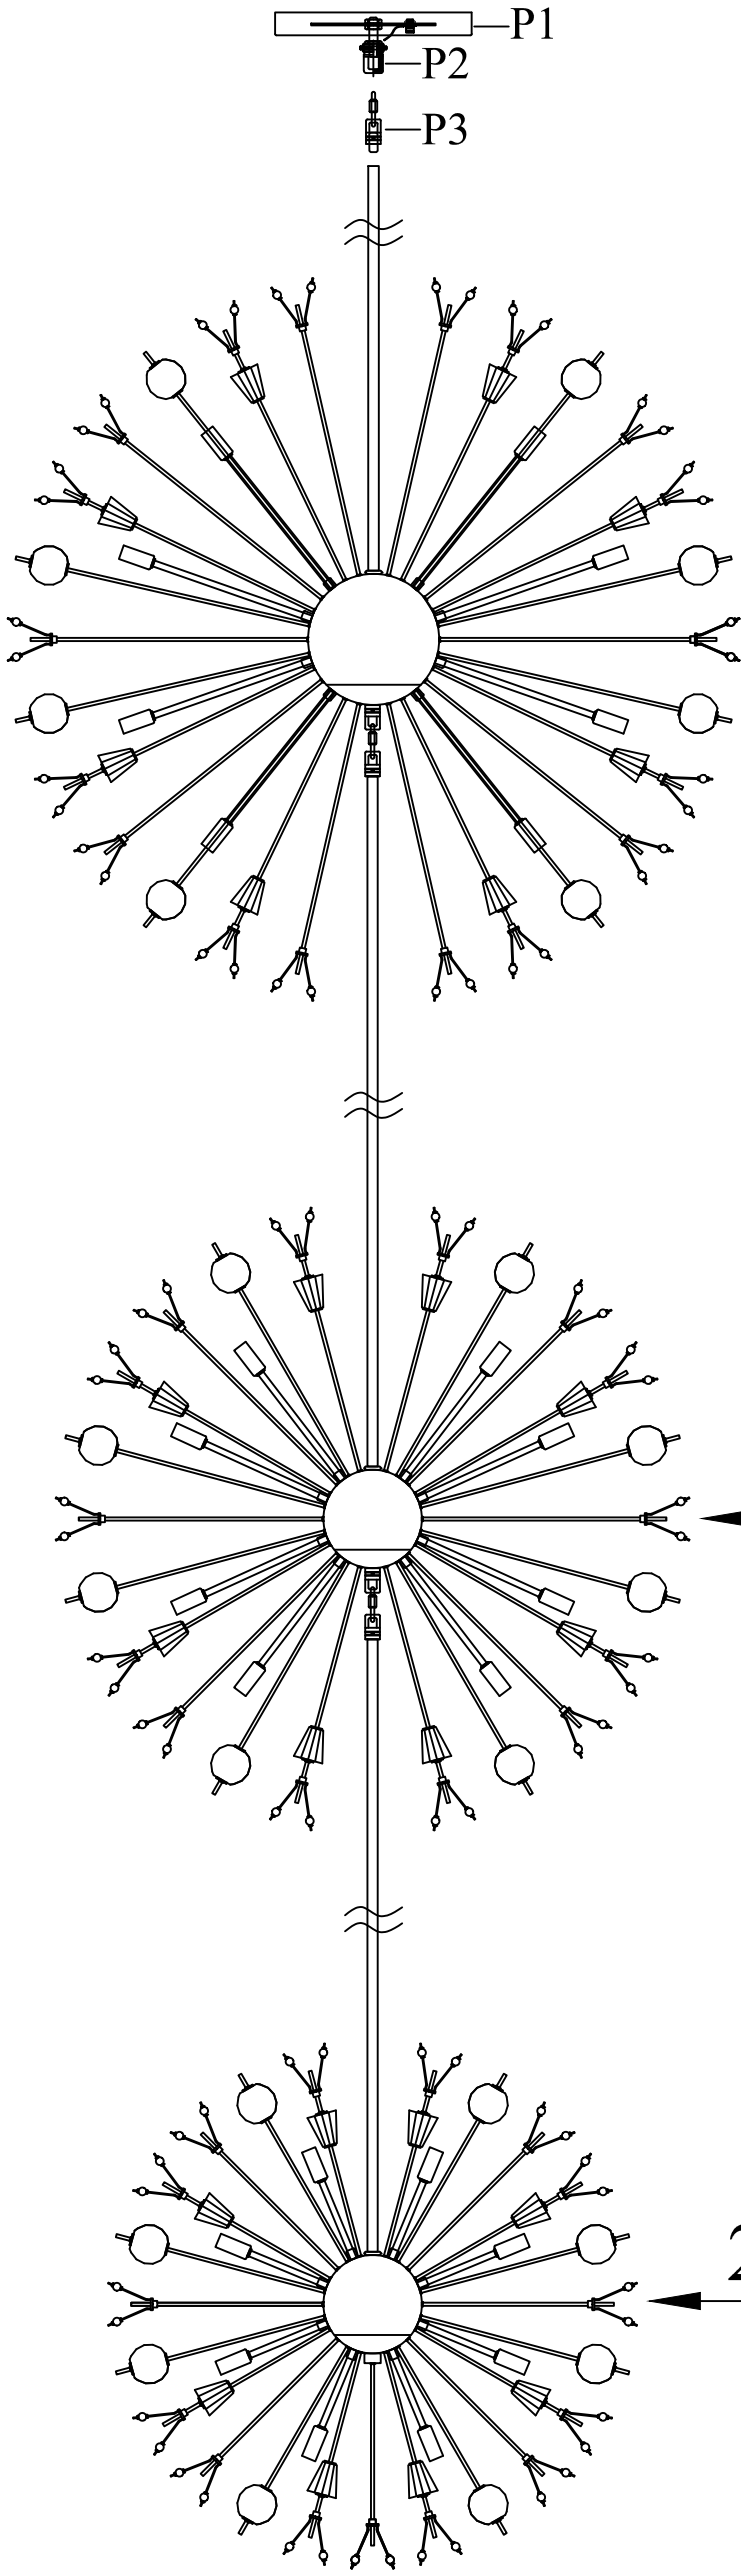


02

# 2500G44L3BK

Step 1

Please use the parts list to ensure you are not missing any parts.

## Assemble three layer lamp body parts list

| Parts Number | Part | Picture | Description | Qty |
|---|---|---|---|---|
| P-2500G44L3BK-P1 | P1 |  | Canopy (φ11.8") | 1 |
| P-2500G44L3BK-P2 | P2 |  | Mounting bracket (Ø7.5") | 1 |
| P-2500G44L3BK-P3 | P3 |  | Bucket ring+Activity buckle | 3 |
| P-2500G44L3BK-P4 | P4 |  | Mounting bracket screw | 4 |
| P-2500G44L3BK-P5 | P5 |  | Safety device+screw | 4 |
| P-2500G44L3BK-P6 | P6 |  | M4 Spanner | 8 |
| P-2500G44L3BK-P7 | P7 |  | The Junction Caps | 6 |
| P-2500G44L3BK-P8 | P8 |  | Steel wire | 1 |
| P-2500G44L3BK-P9 | P9 |  | Cable tie | 4 |
| P-2500G44L3BK-Z1 | Z1 |  | φ1.7″Circular gasket | 2 |
| P-2500G44L3BK-Z2 | Z2 |  | $\frac{5}{8}$″ Hexagon nut | 3 |
| P-2500G44L3BK-Z3 | Z3 |  | $\frac{5}{8}$″ Threaded rod(L12”) | 1 |
| P-2500G44L3BK-Z4 | Z4 |  | Heavy duty hickey(L2″)($\frac{5}{8}$″and $\frac{1}{4}$-18″) | 1 |
| P-2500G44L3BK-Z5 | Z5 |  | $\frac{1}{4}$-18″ Hexagon nut | 3 |
| P-2500G44L3BK-Z6 | Z6 |  | $\frac{1}{4}$-18″ Threaded rod(L3.14”) | 1 |

# 2500G44L3BK

## Step 2 Find a large workbench and follow these steps to assemble the lamp body

① :Take out the 2500G44L3BK-3 lamp body, and use P6 to twist the screw out of the bucket to open the ball cover.

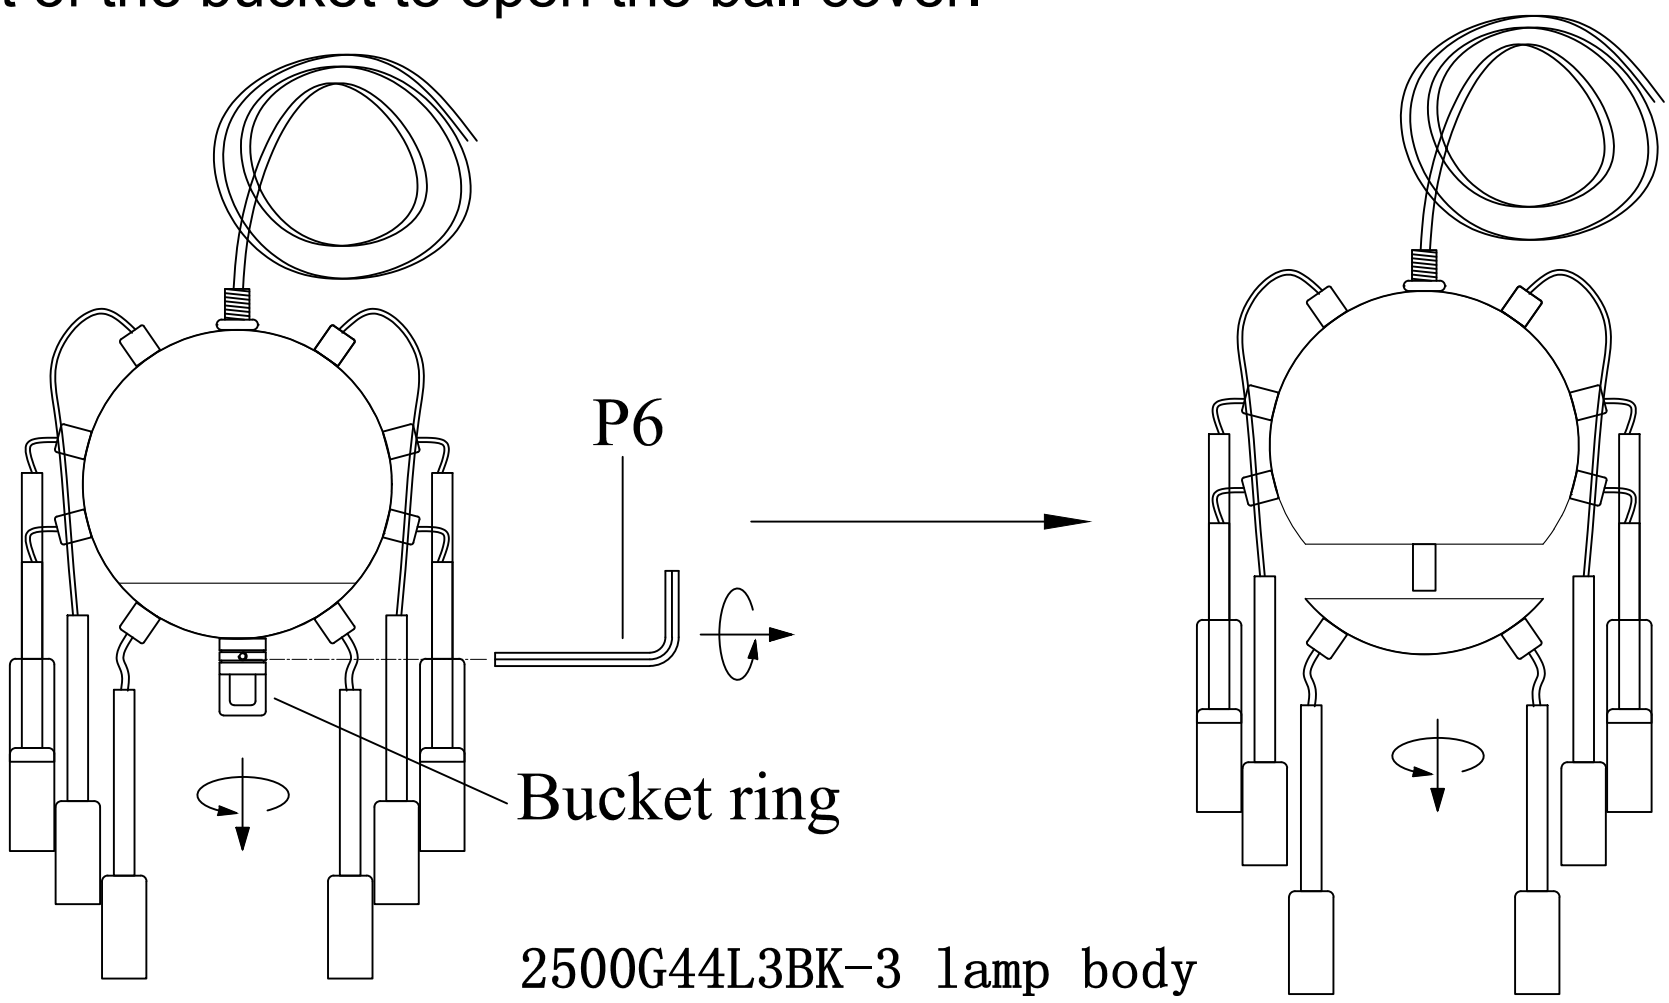


② :As shown in the below picture, pass the P8 (steel wire) through the inside of the lamp body and then through the ball cover, bucket ring and rod in turn.
(Rod length please adjust according to your own desired length)

③ :Take out the 2500G44L3BK-2 lamp body, and use the P6(M4 Spanner) to unscrew the bucket ring and open the ball cover.

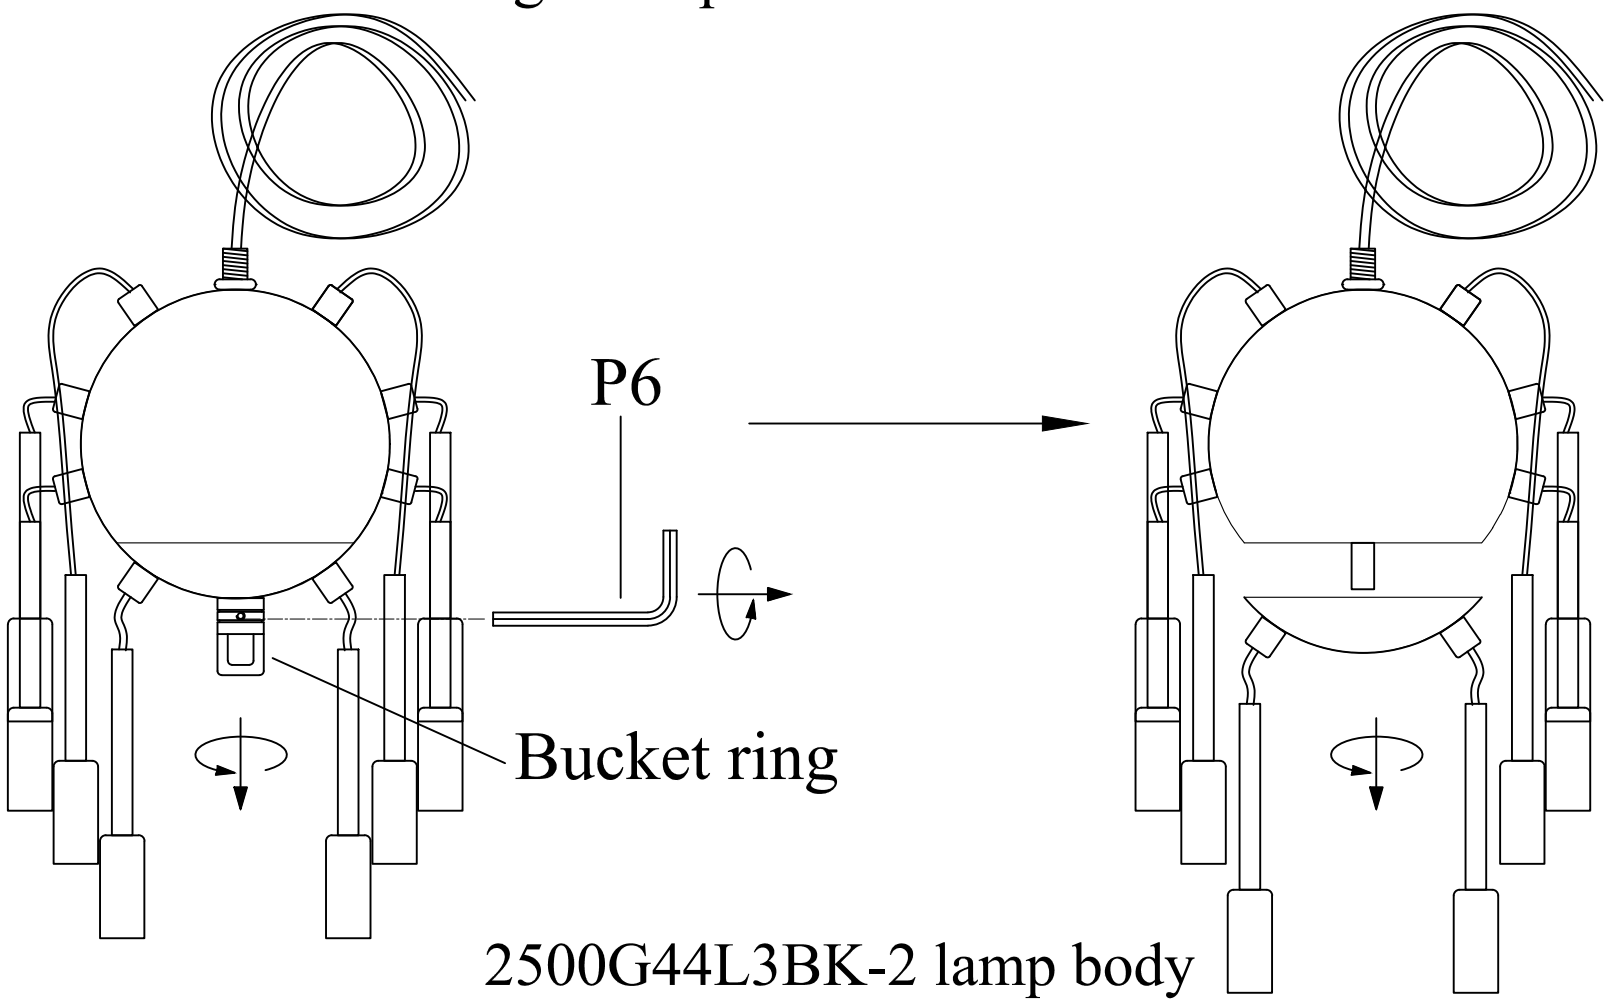


④ :Thread the P8(steel wire) through the 2500G44L3BK-2 lamp body until it passes through the ball cover as shown below.

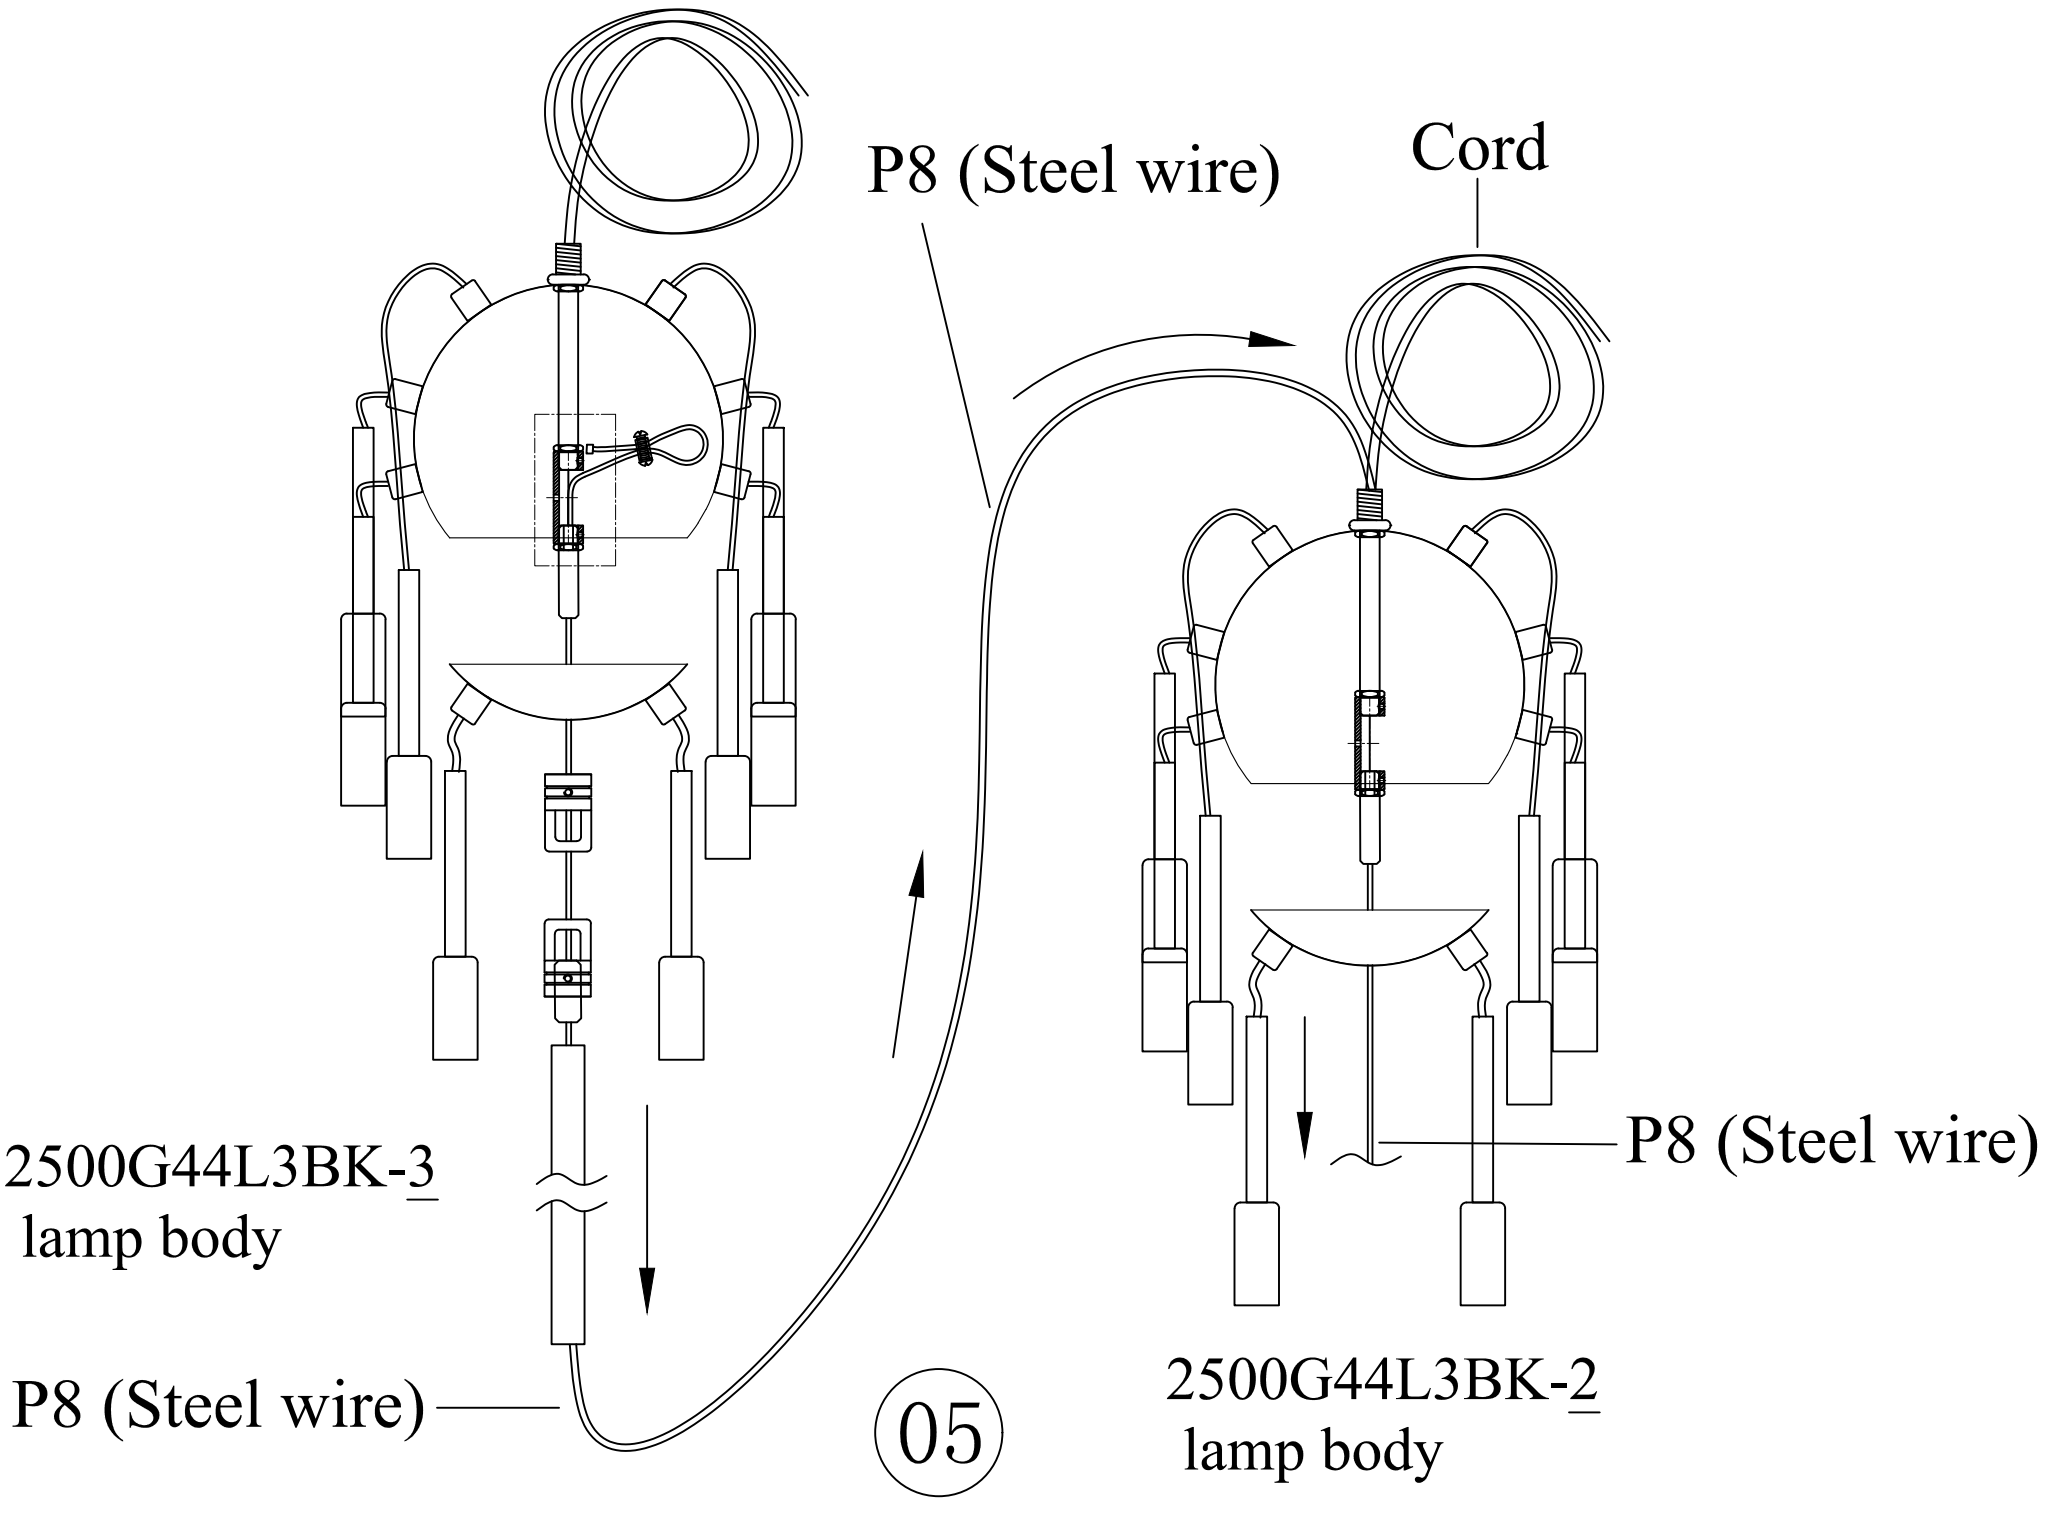

# 2500G44L3BK

⑤:Pass the cord of the 2500G44L3BK-2 lamp body into the 2500G44L3BK-3 lamp body as shown in the below figure. Find the wiring cover in the lamp body, connect the cords of the two lamp bodies together, and then tie the two cords tightly with P9 (Cable tie).

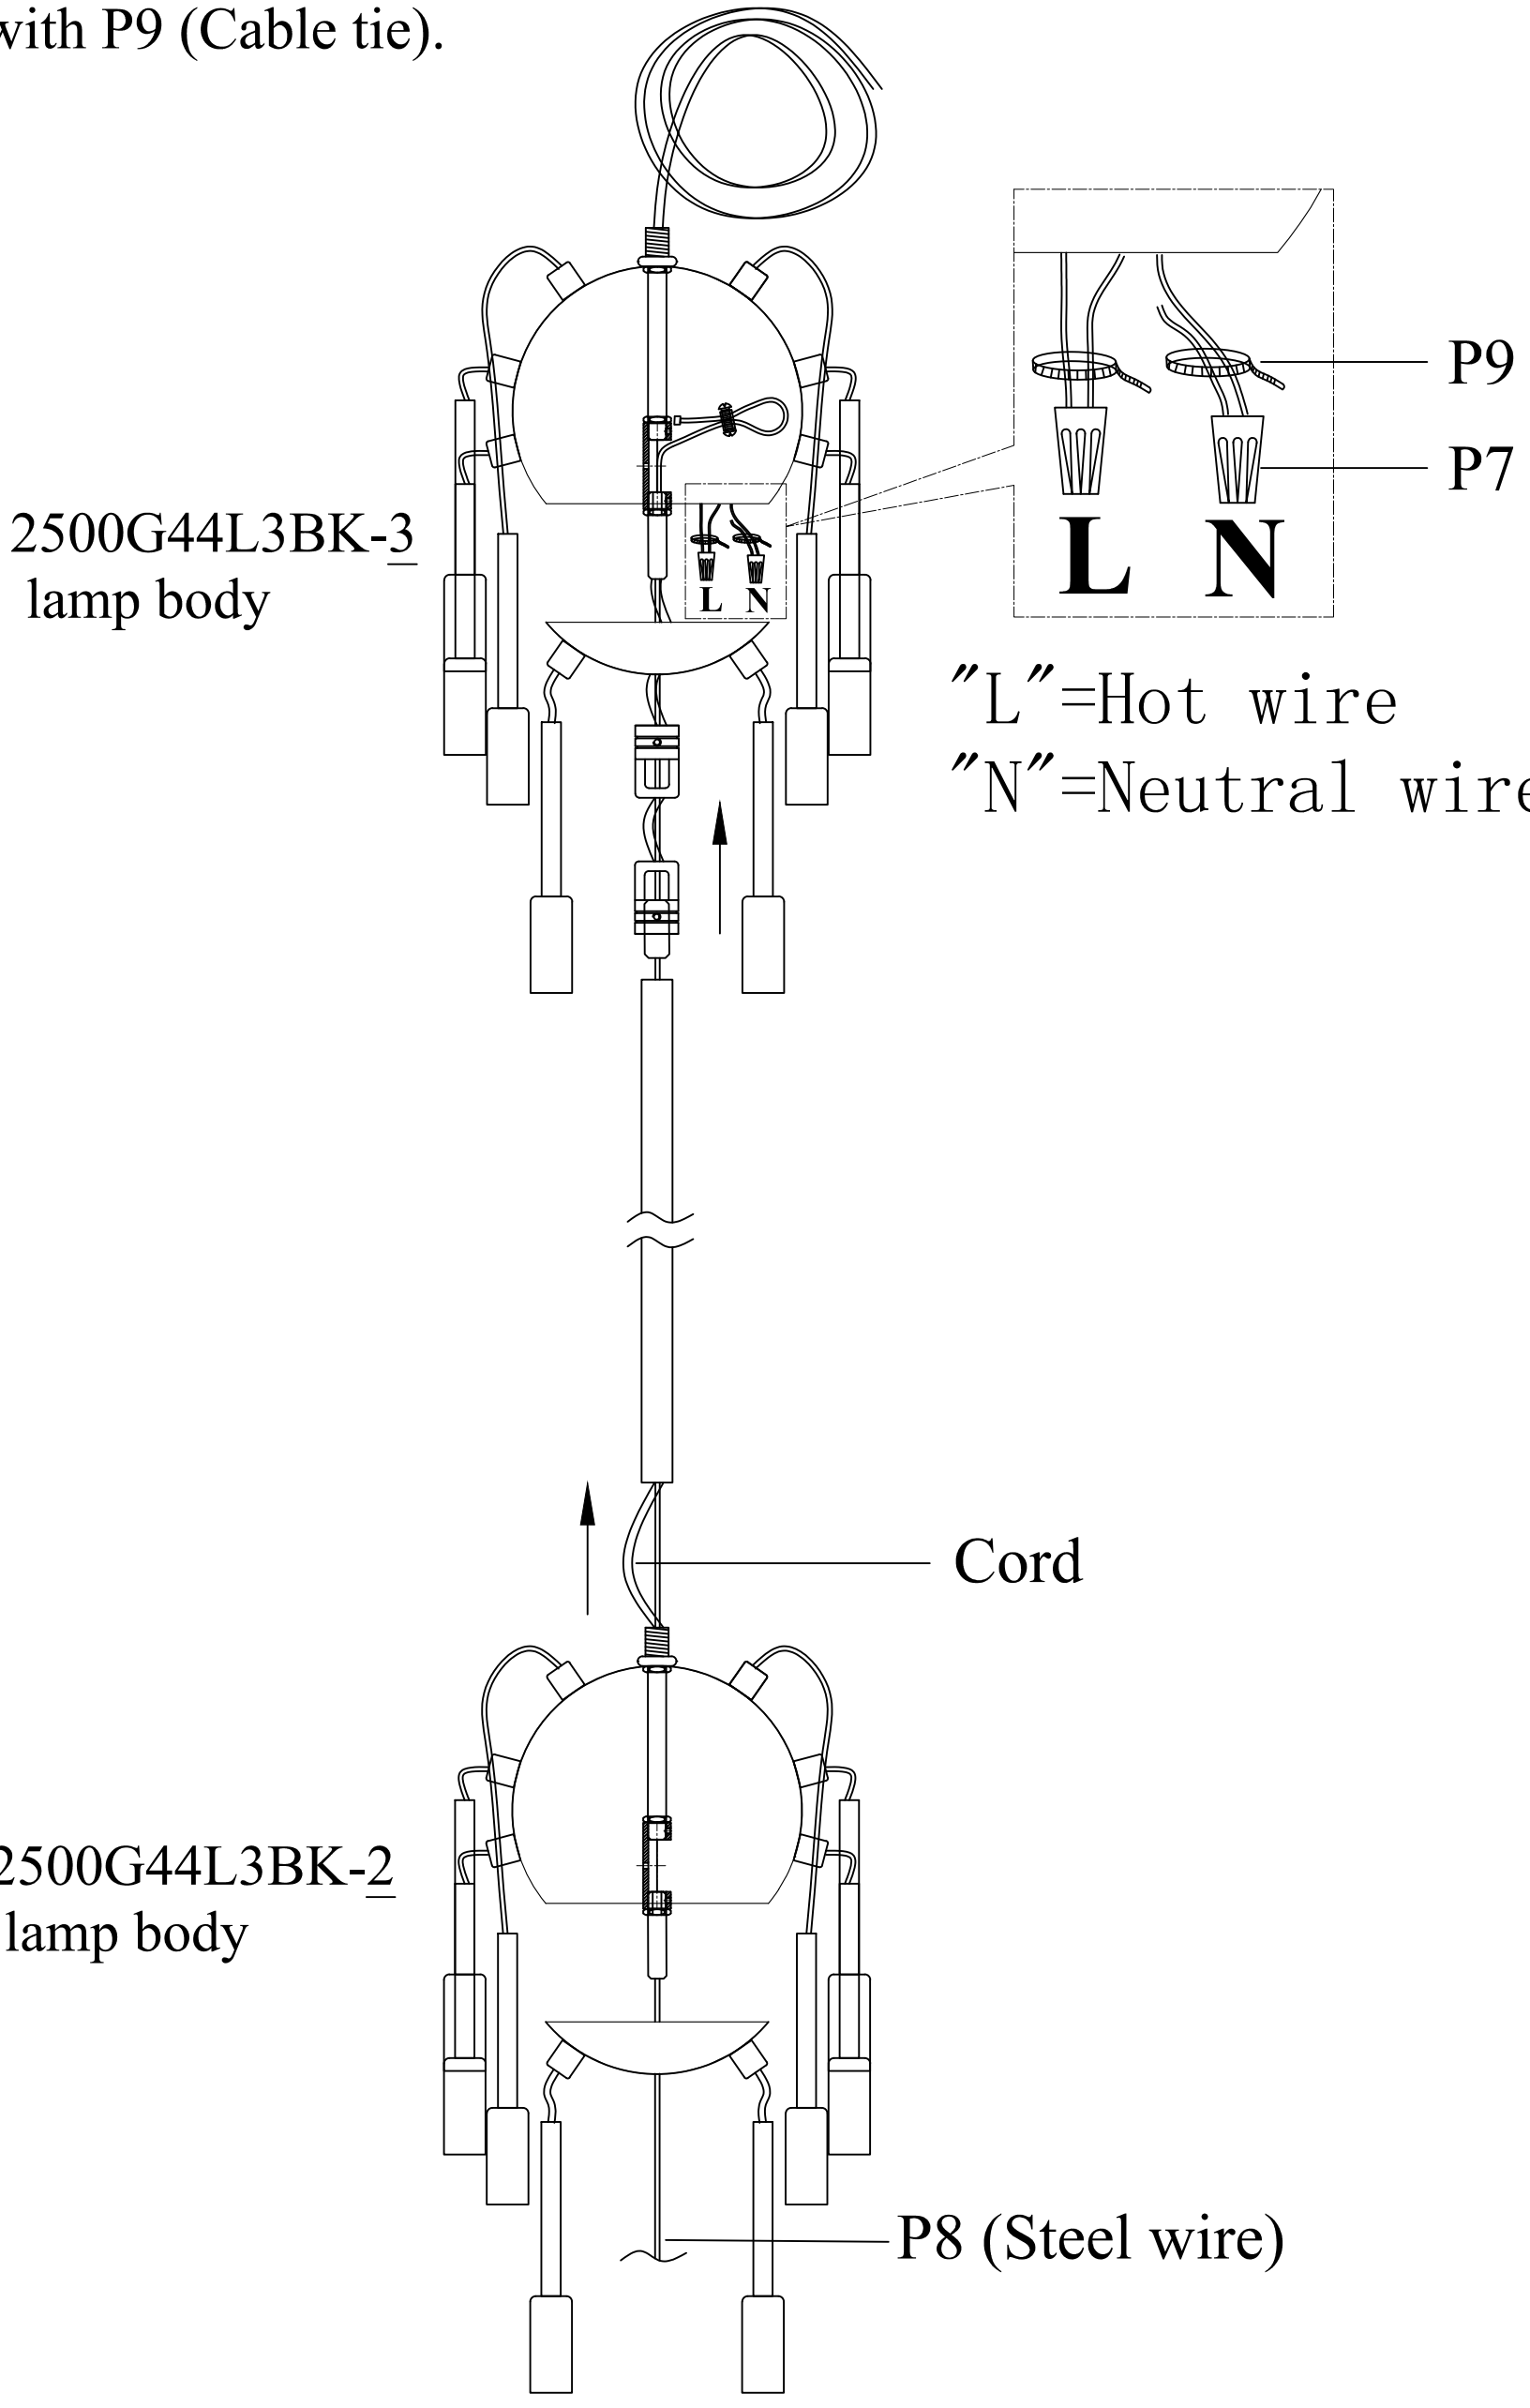

# 2500G44L3BK

⑥:As shown in below figure, twist the Bucket ring and rod, close the ball cover, push the excess cord into the 2500G44L3BK-3 lamp body, then connect the activity buckle and bucket ring , and finally use the (P6)M4 spanner to tighten the M4 screws in the corresponding hole of the bucket ring.

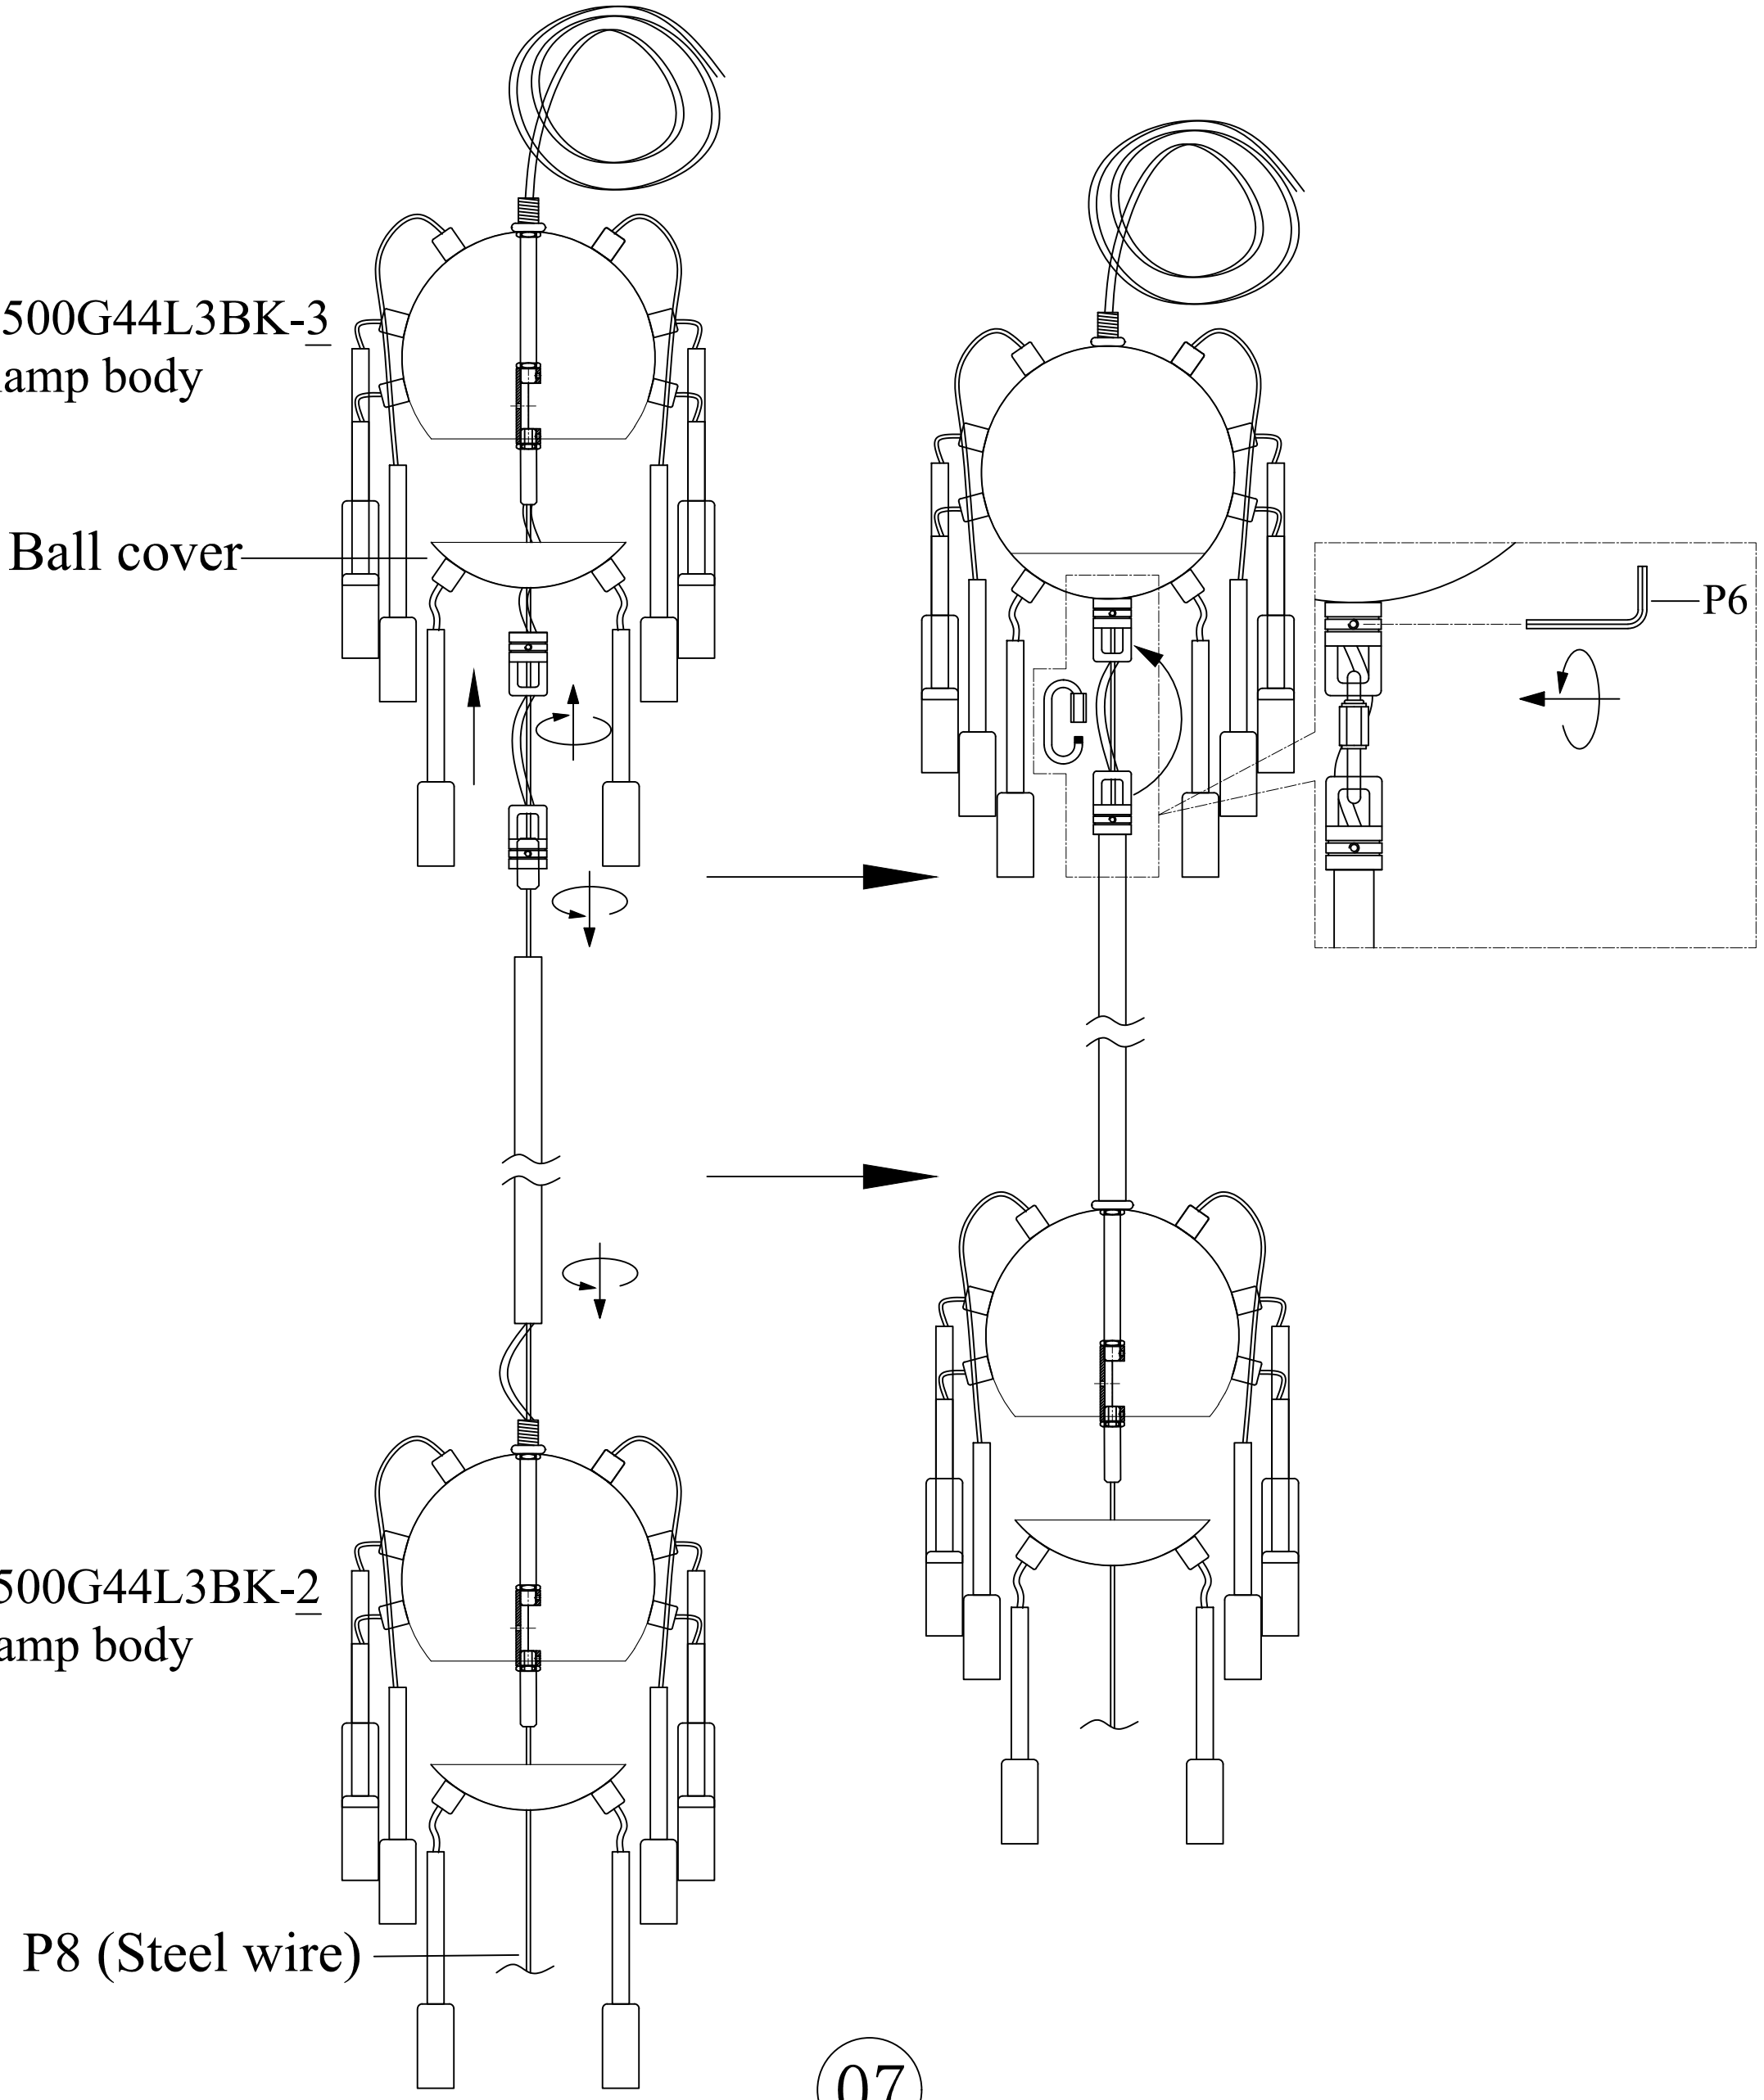

# 2500G44L3BK

⑦:As shown in below picture, pass the P8 (steel wire) through the 2500G44L3BK-2 lamp body and then through the ball cover, bucket and rod in turn. (Rod length please adjust according to your own desired length).
Twist off the 2500G44L3BK-1 lamp body (nut) and open the ball cover. Then pass the steel wire through the metal bracket in 2500G44L3BK-1.

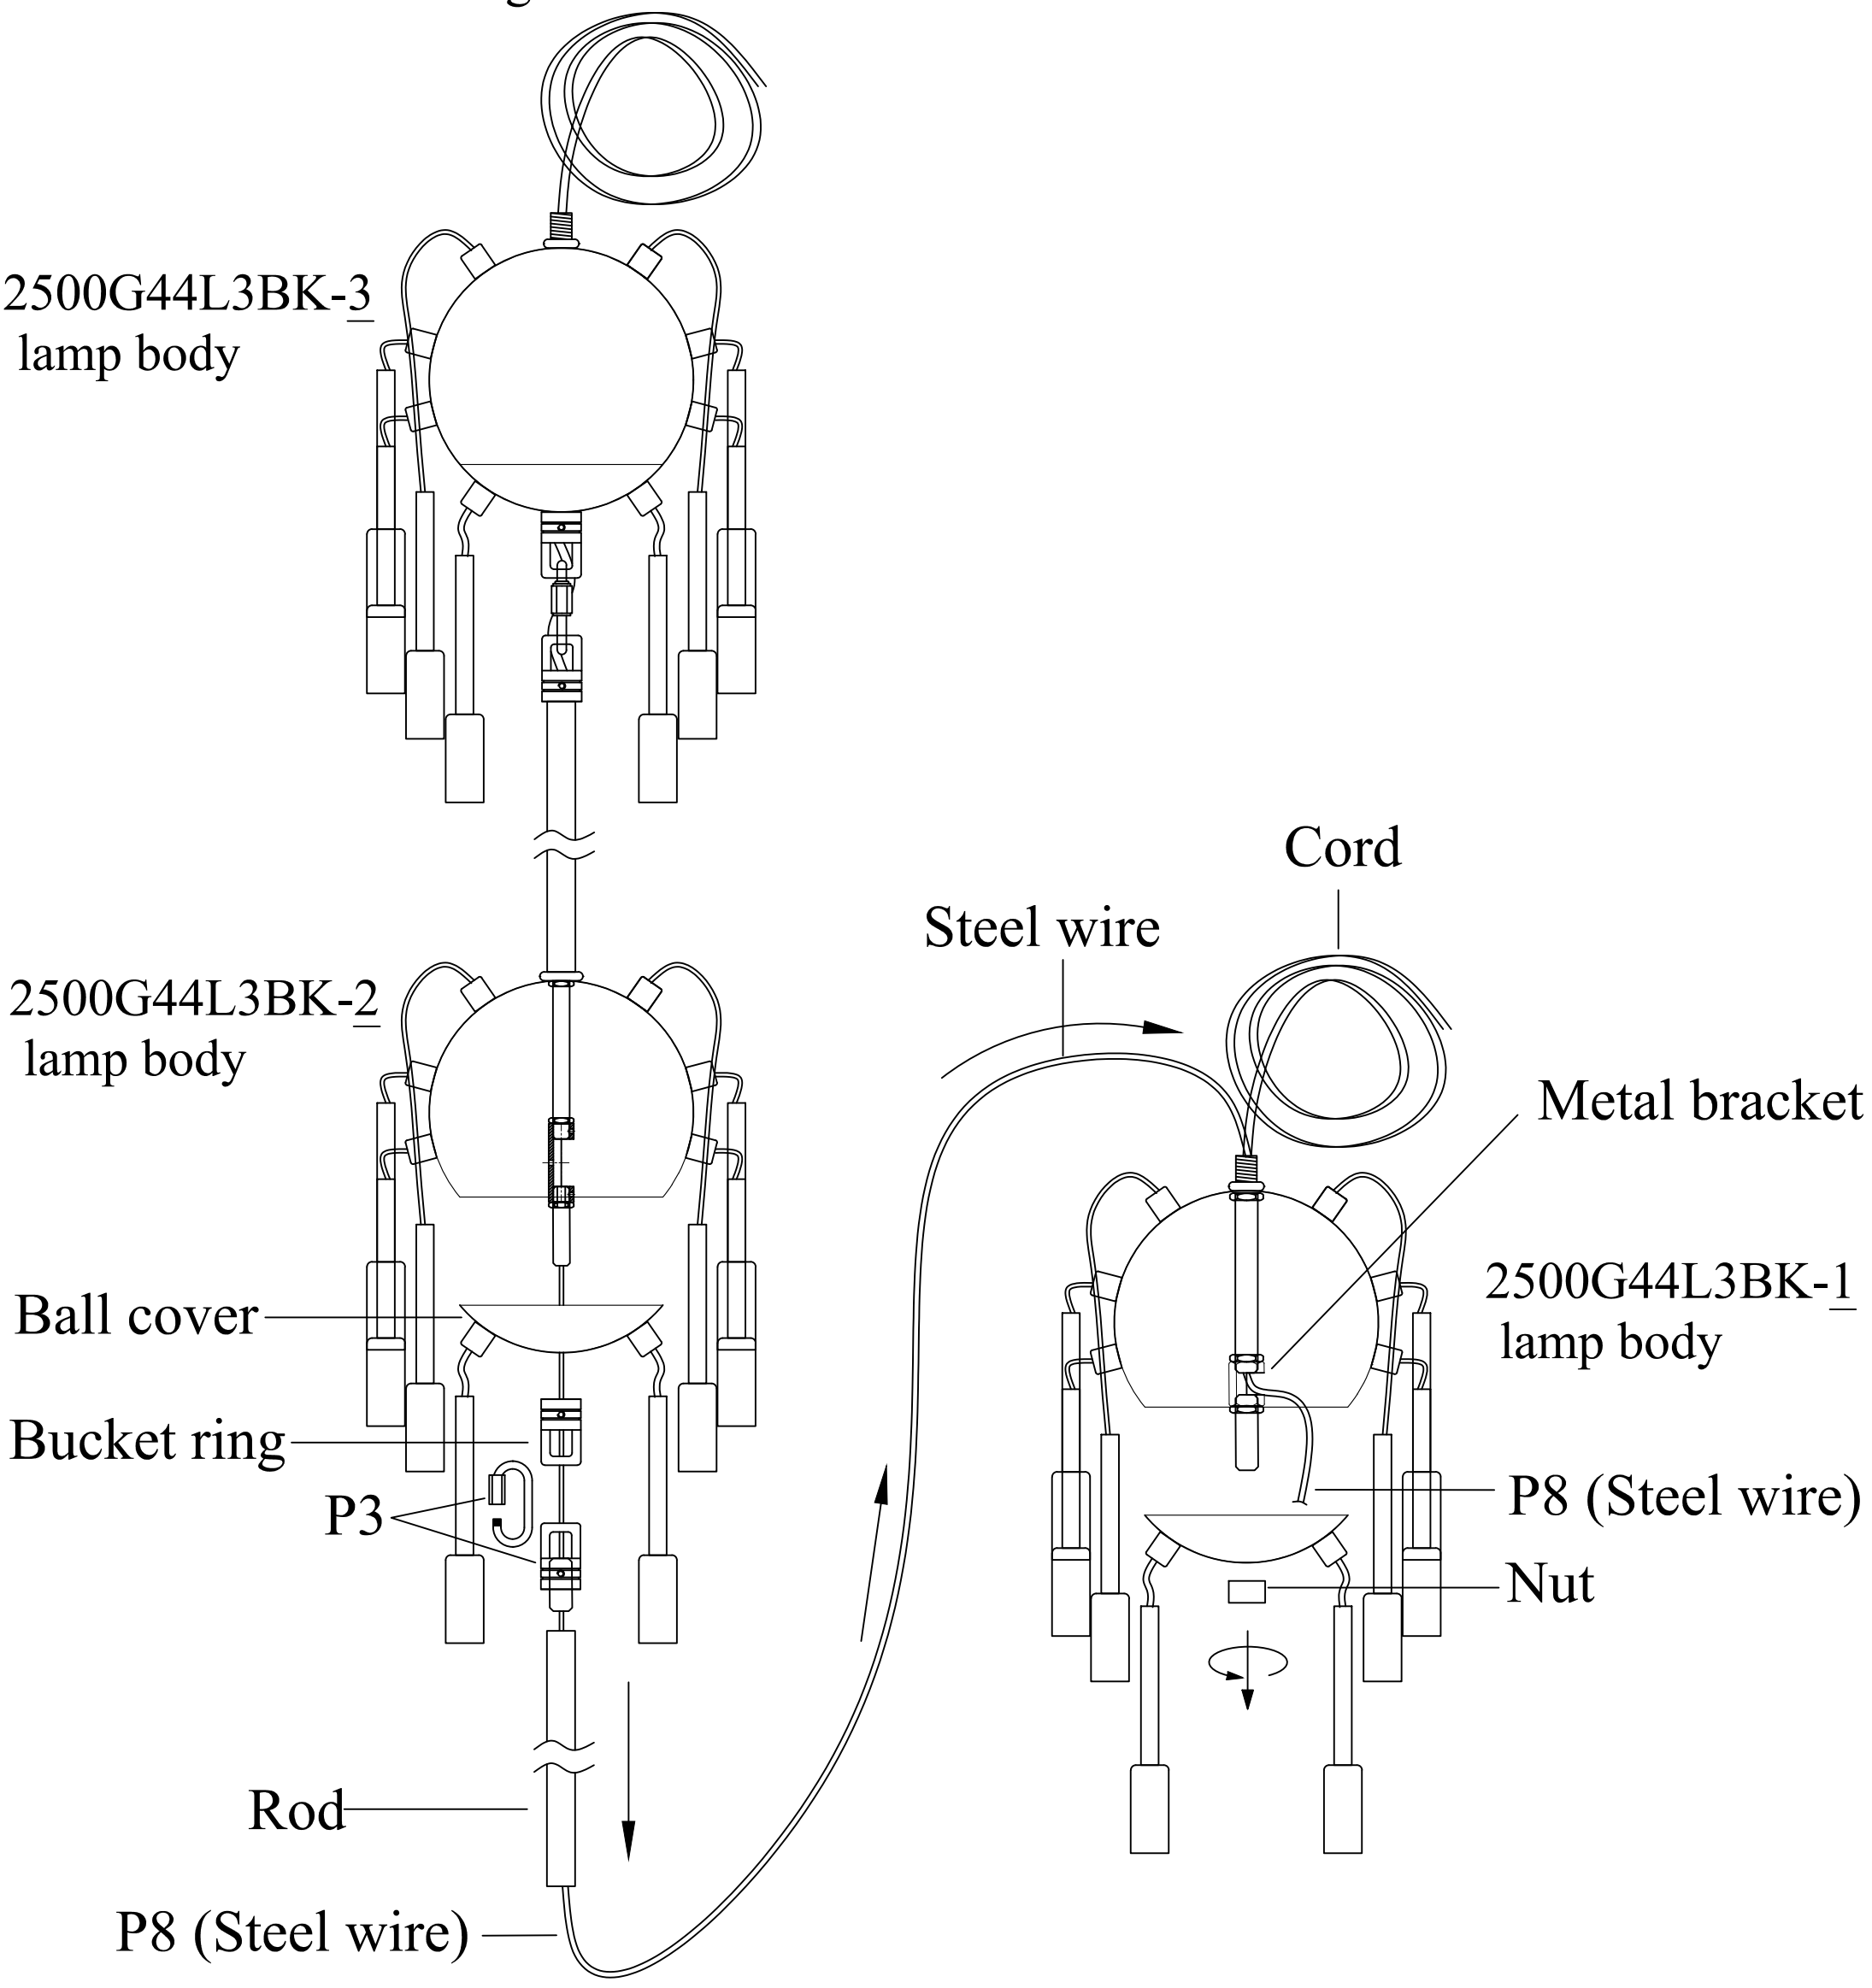

# 2500G44L3BK

⑧ :Pass the cord of the 2500G44L3BK-1lamp body into the 2500G44L3BK-2 lamp body as shown in the below figure. Find the wiring cover in the lamp body, connect the cords of the two lamp bodies together, and then tie the two cords tightly with P9 (Cable tie).

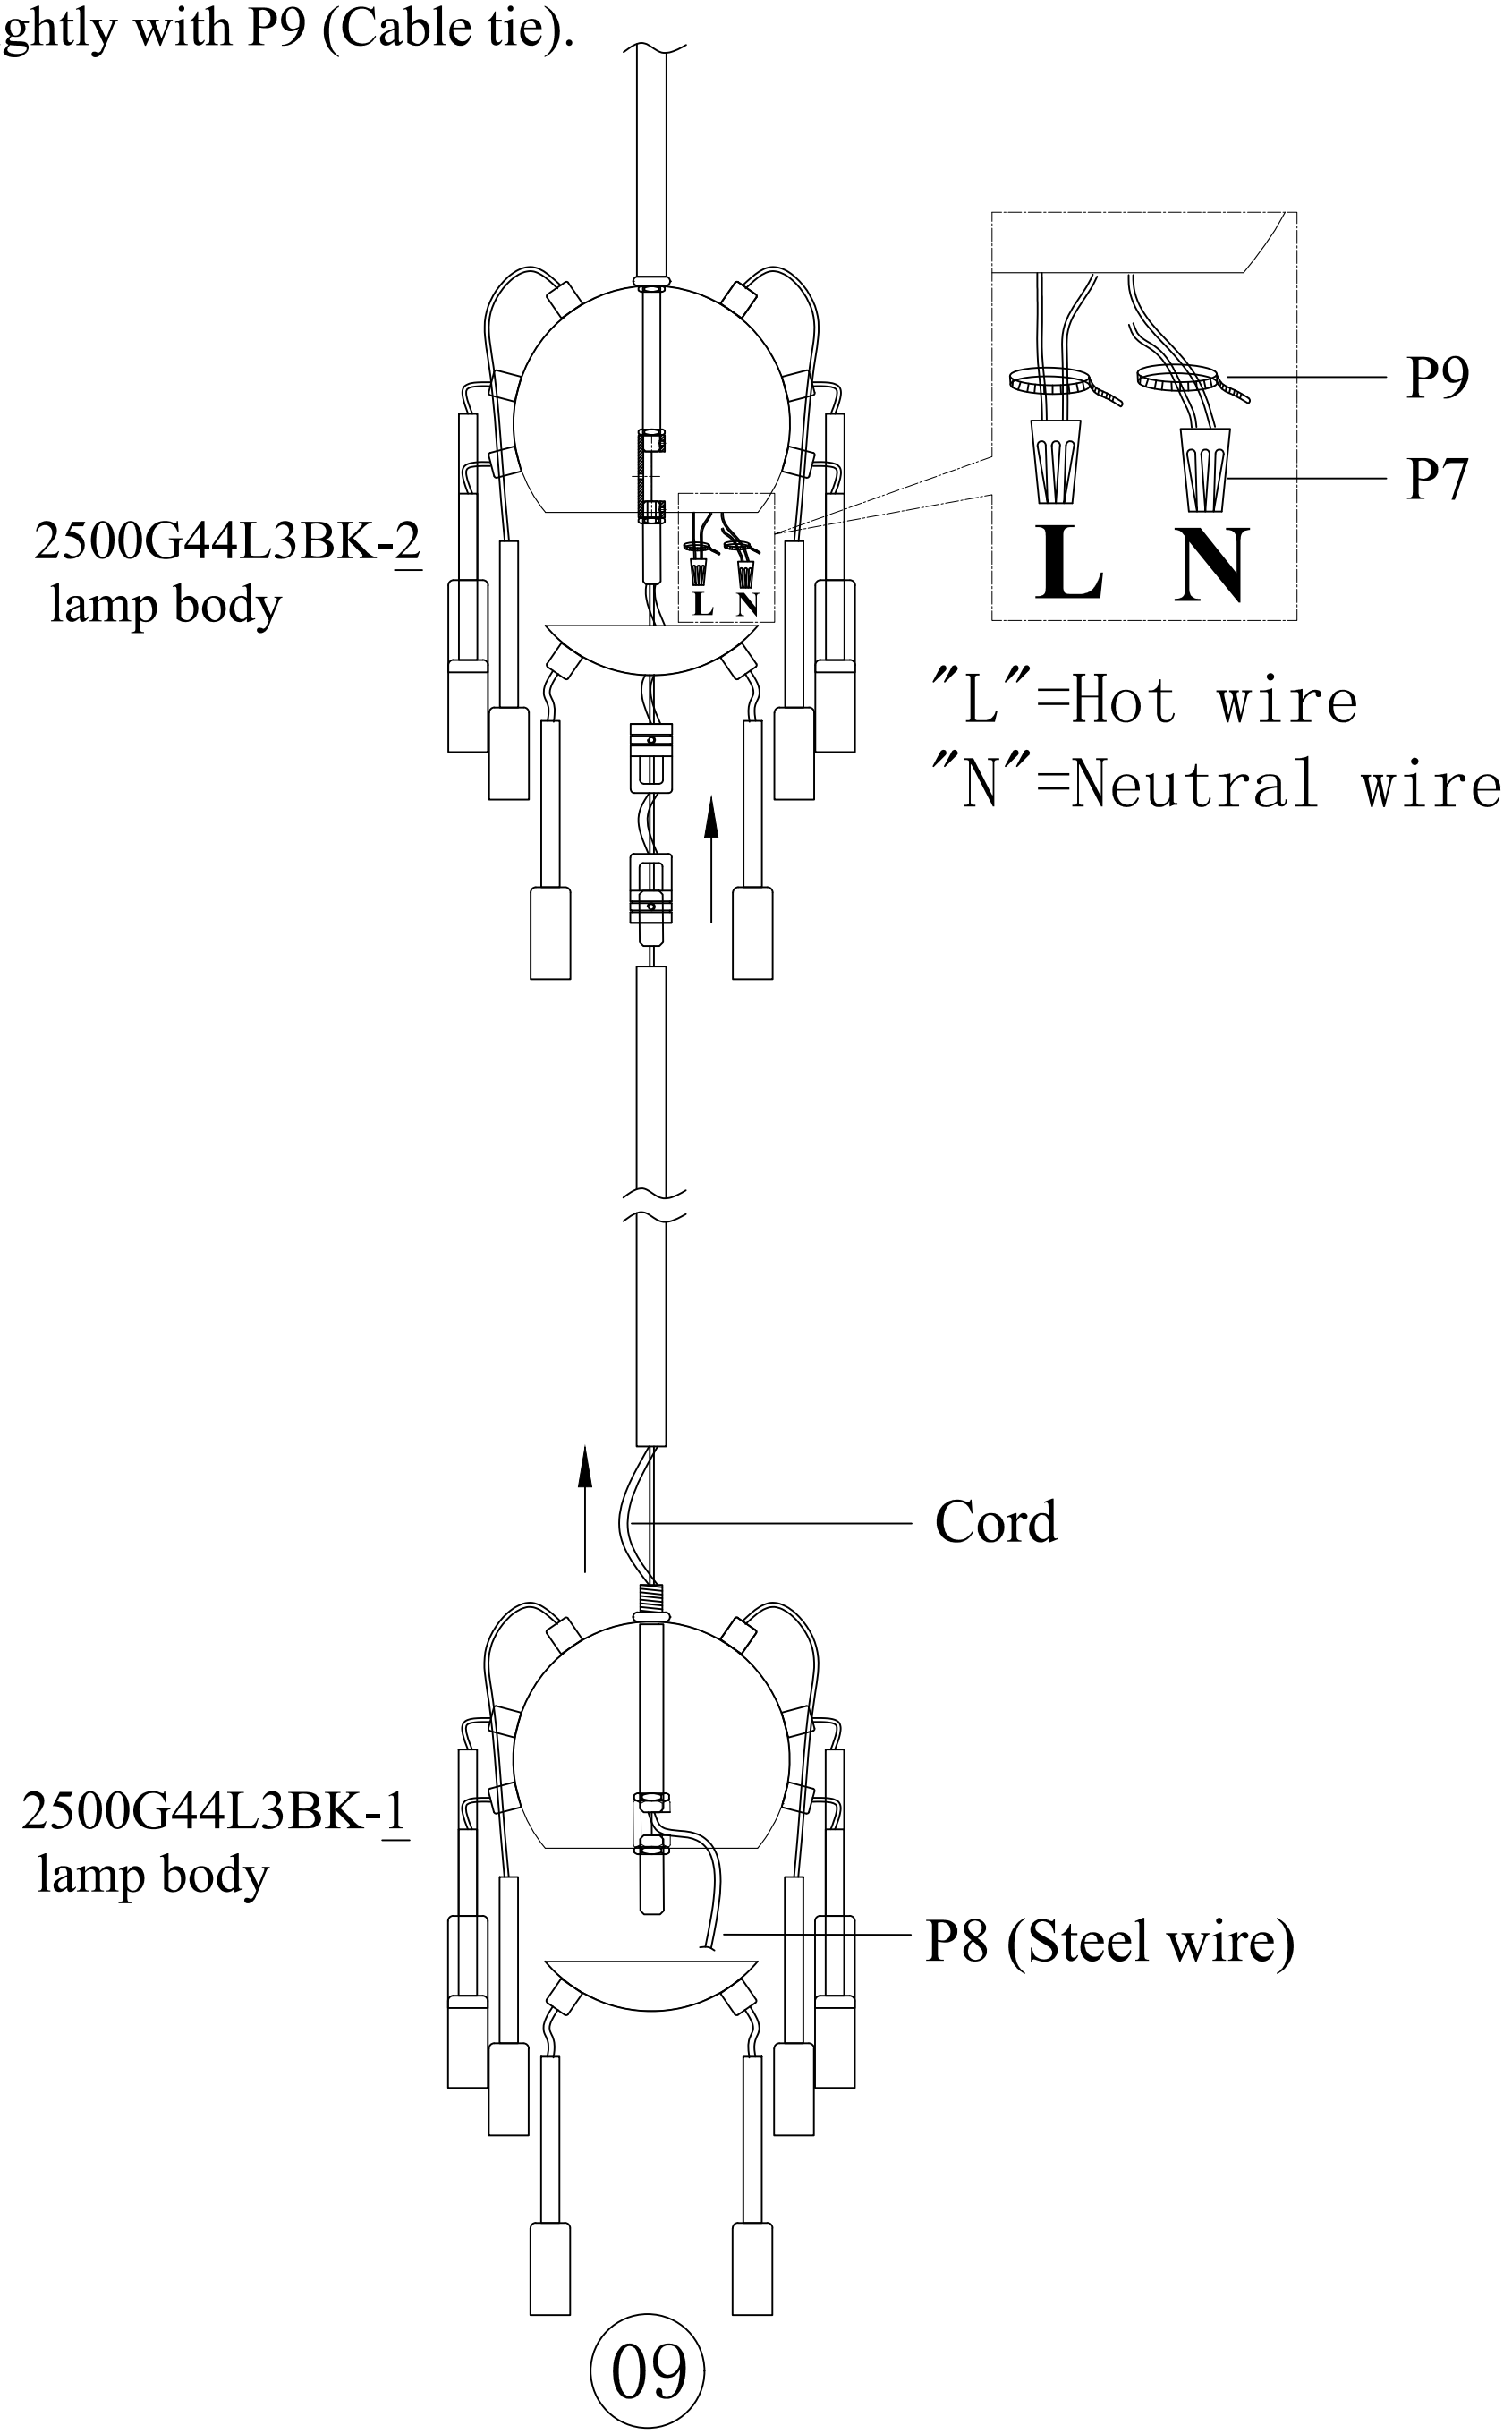

# 2500G44L3BK

⑨ :As shown in below figure, twist the Bucket ring and rod, close the ball cover, push the excess cord into the 2500G44L3BK-2 lamp body, then connect the activity buckle and bucket ring , and finally use the (P6)M4 spanner to tighten the M4 screws in the corresponding hole of the bucket ring.

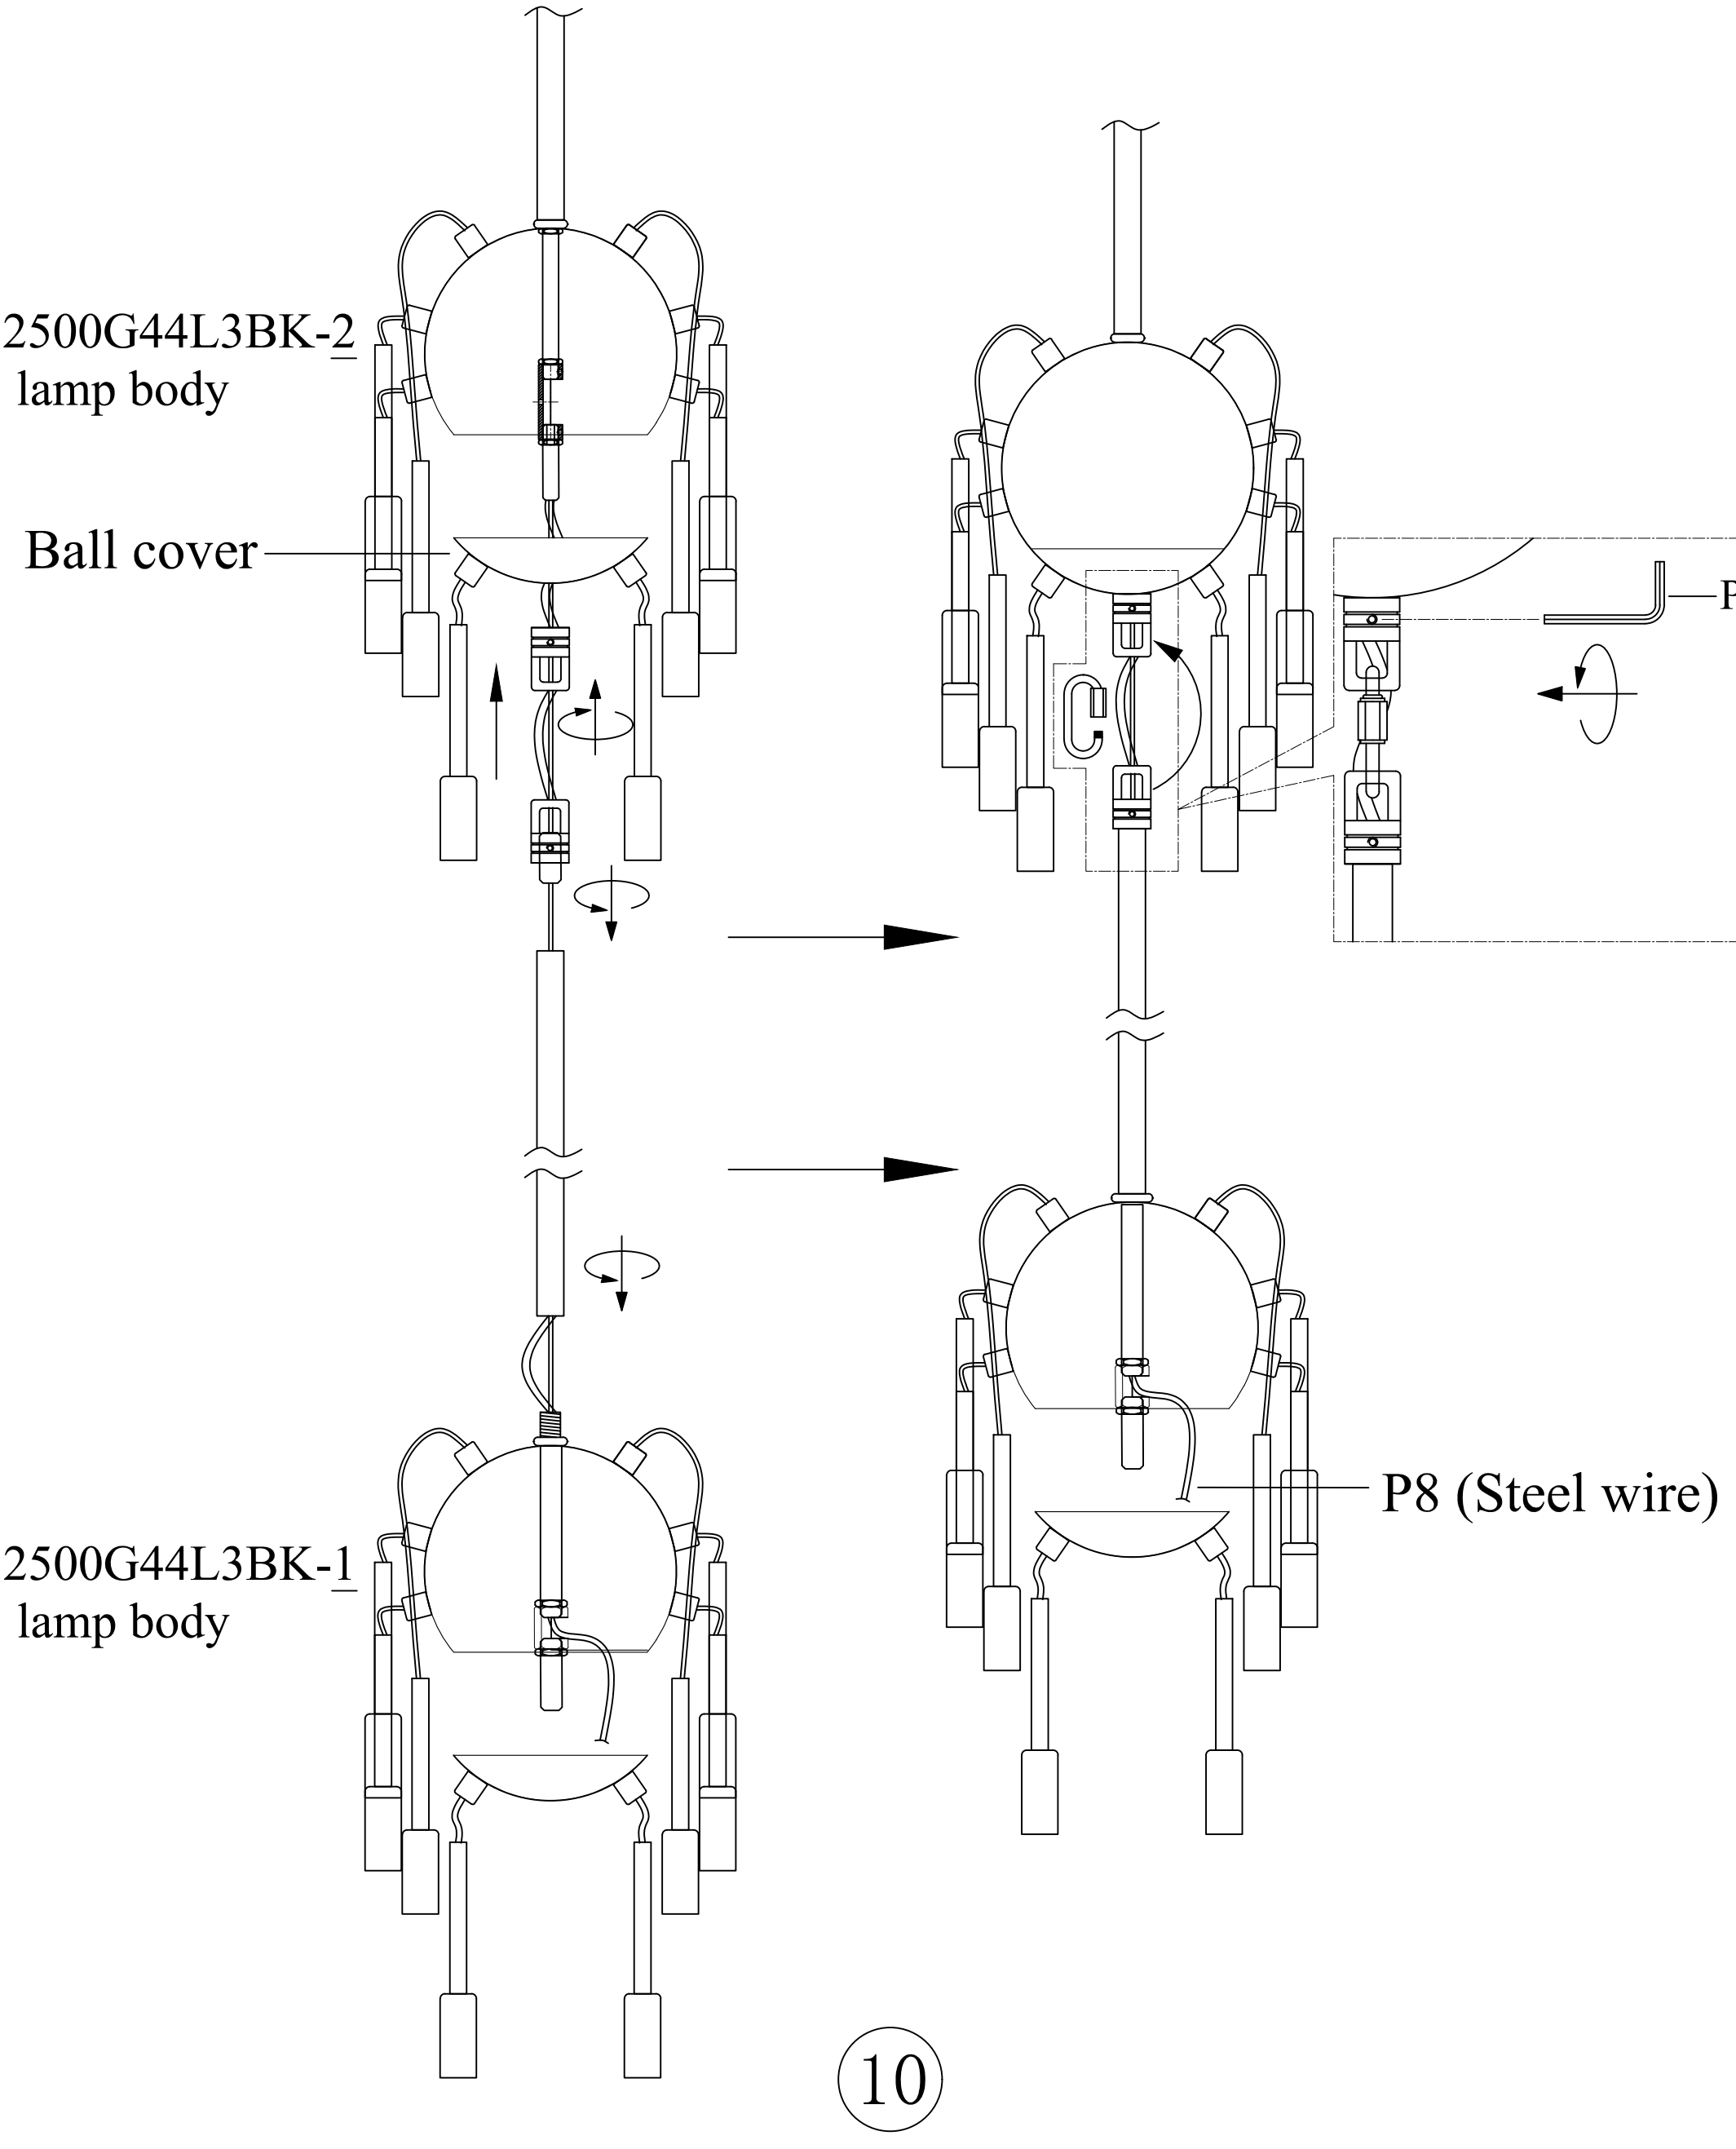

# 2500G44L3BK

⑩:As shown in below picture, first pull down the excess steel wire !!! Then use P5 (Safety device) to lock the steel wire, roll up the excess steel wire put it into the 2500G44L3BK-1 lamp body. Finally, close the ball cover by nut.

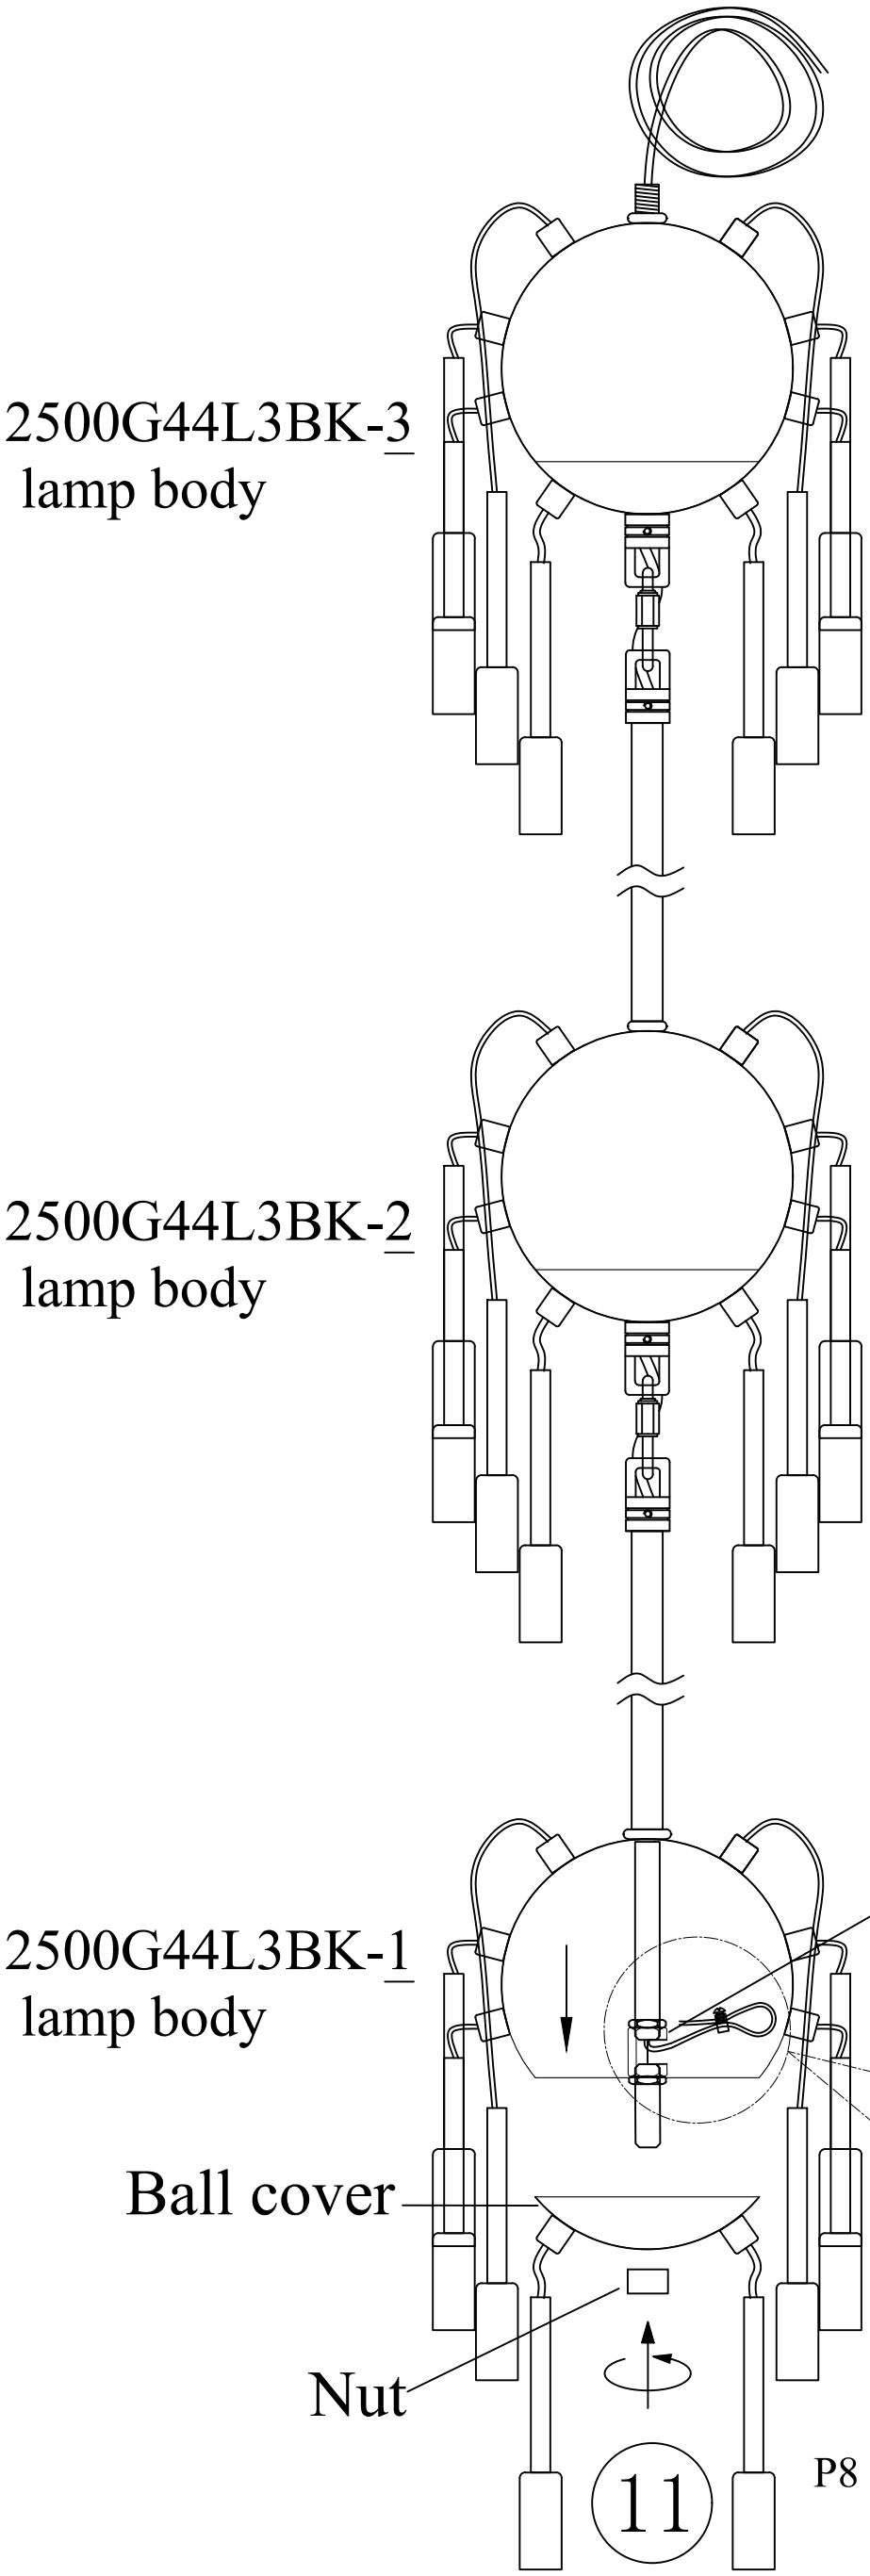




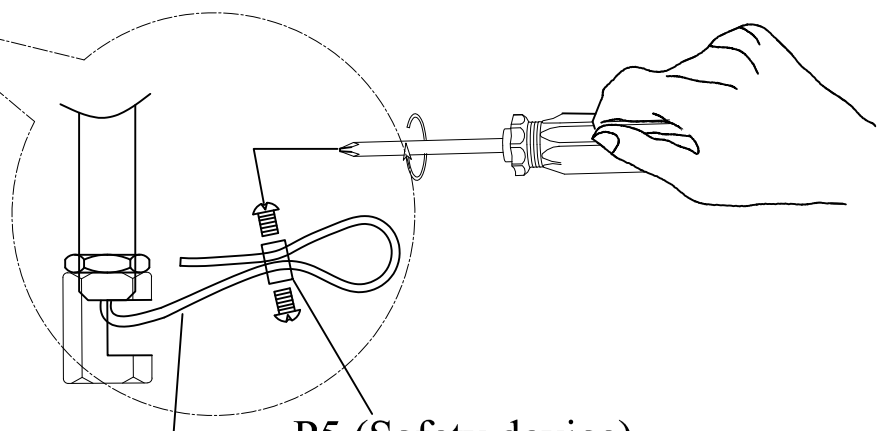

# 2500G44L3BK

⑪:Tighten the lamp holder rod in the corresponding hole of the lamp body.
(Rod length please adjust according to your own desired length).

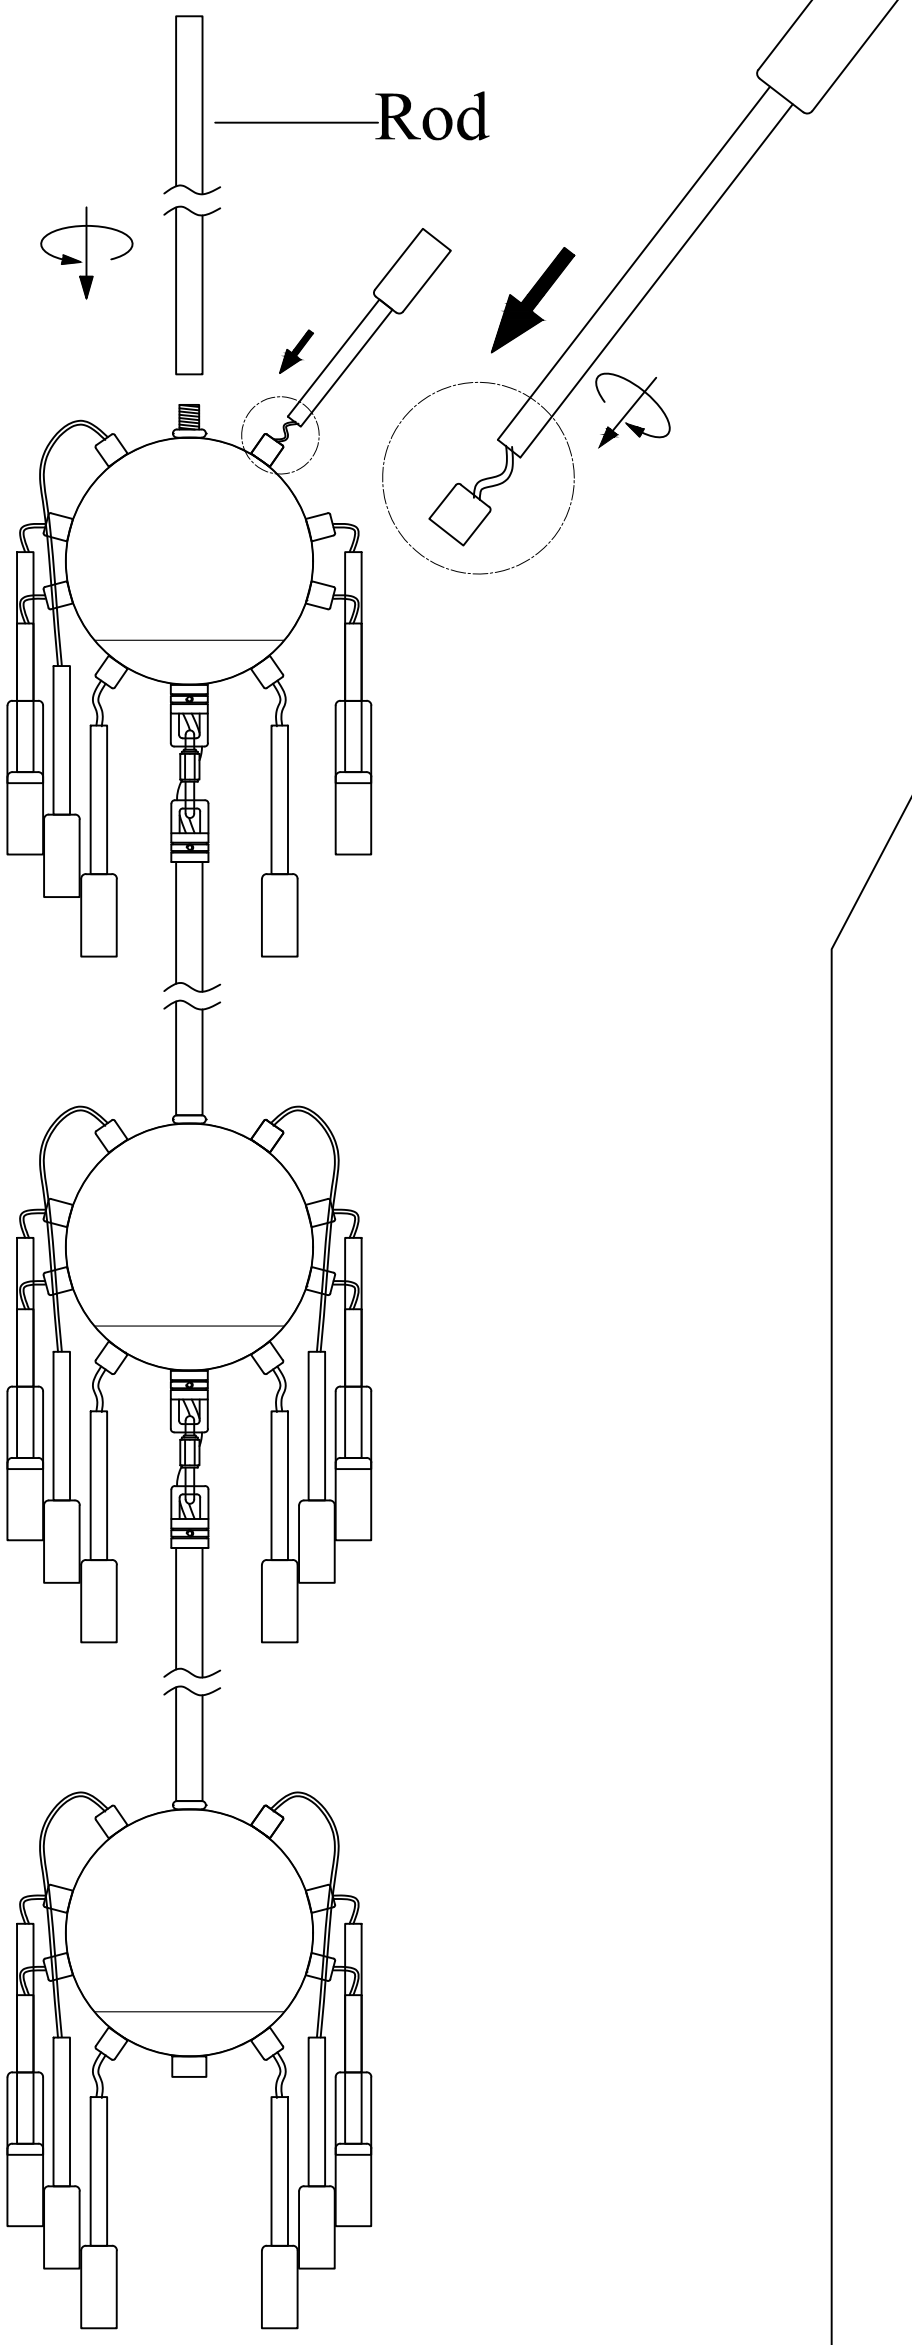


Finished

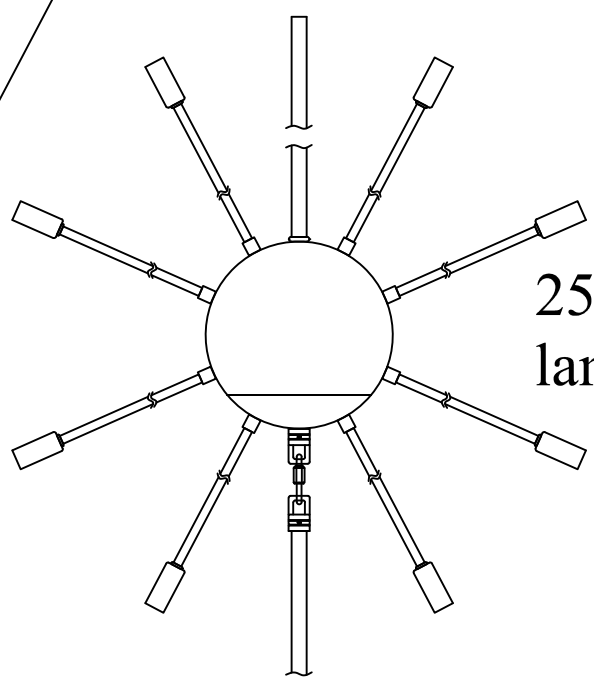

2500G44L3BK-3
lamp body

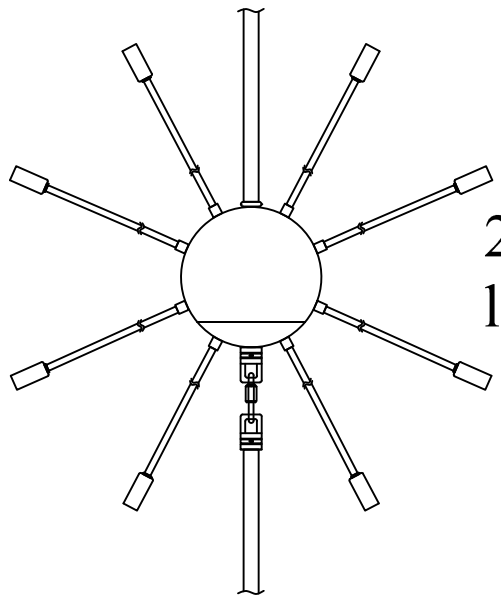

2500G44L3BK-2
lamp body

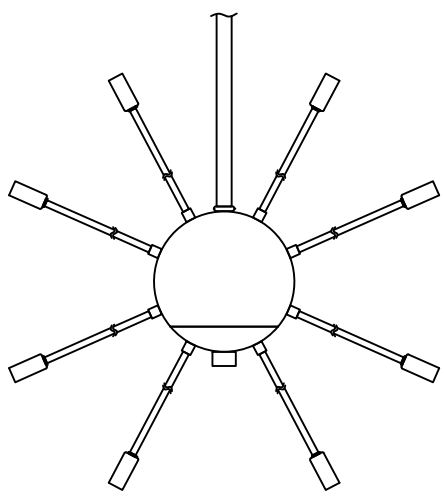

2500G44L3BK-1
lamp body

# 2500G44L3BK

**Note:Test sockets with bulbs (Max 20W) before dressing the fixture!!!**

## Step 3 Canopy Instation Instrustion

①:Attach the (P2) plate to the ceiling with four (P4) screws.

②: Twist (P3) to the rod of the 2500G44L3BK-3 lamp body, and pass the (P1) suction top plate through the rod, and then use the adjustable buckle to the (P2) hanging plate.

③:Thread the power cord under the plate, then wired

④:Lead the steel wire under the hanging plate, through the corresponding holes of the cylindrical iron parts, and fix the (P5)safety device and steel wire with a screwdriver according to the picture.

⑤:Finally, lock the disc of (P1) with a nut.

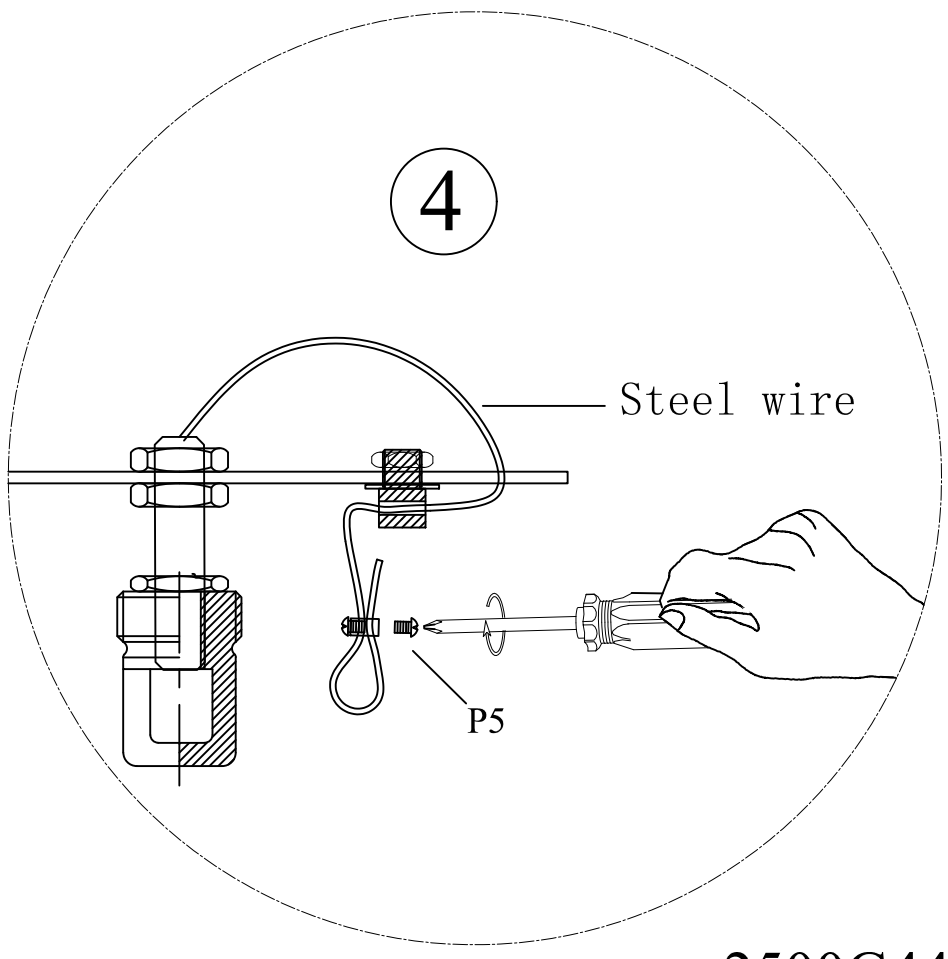


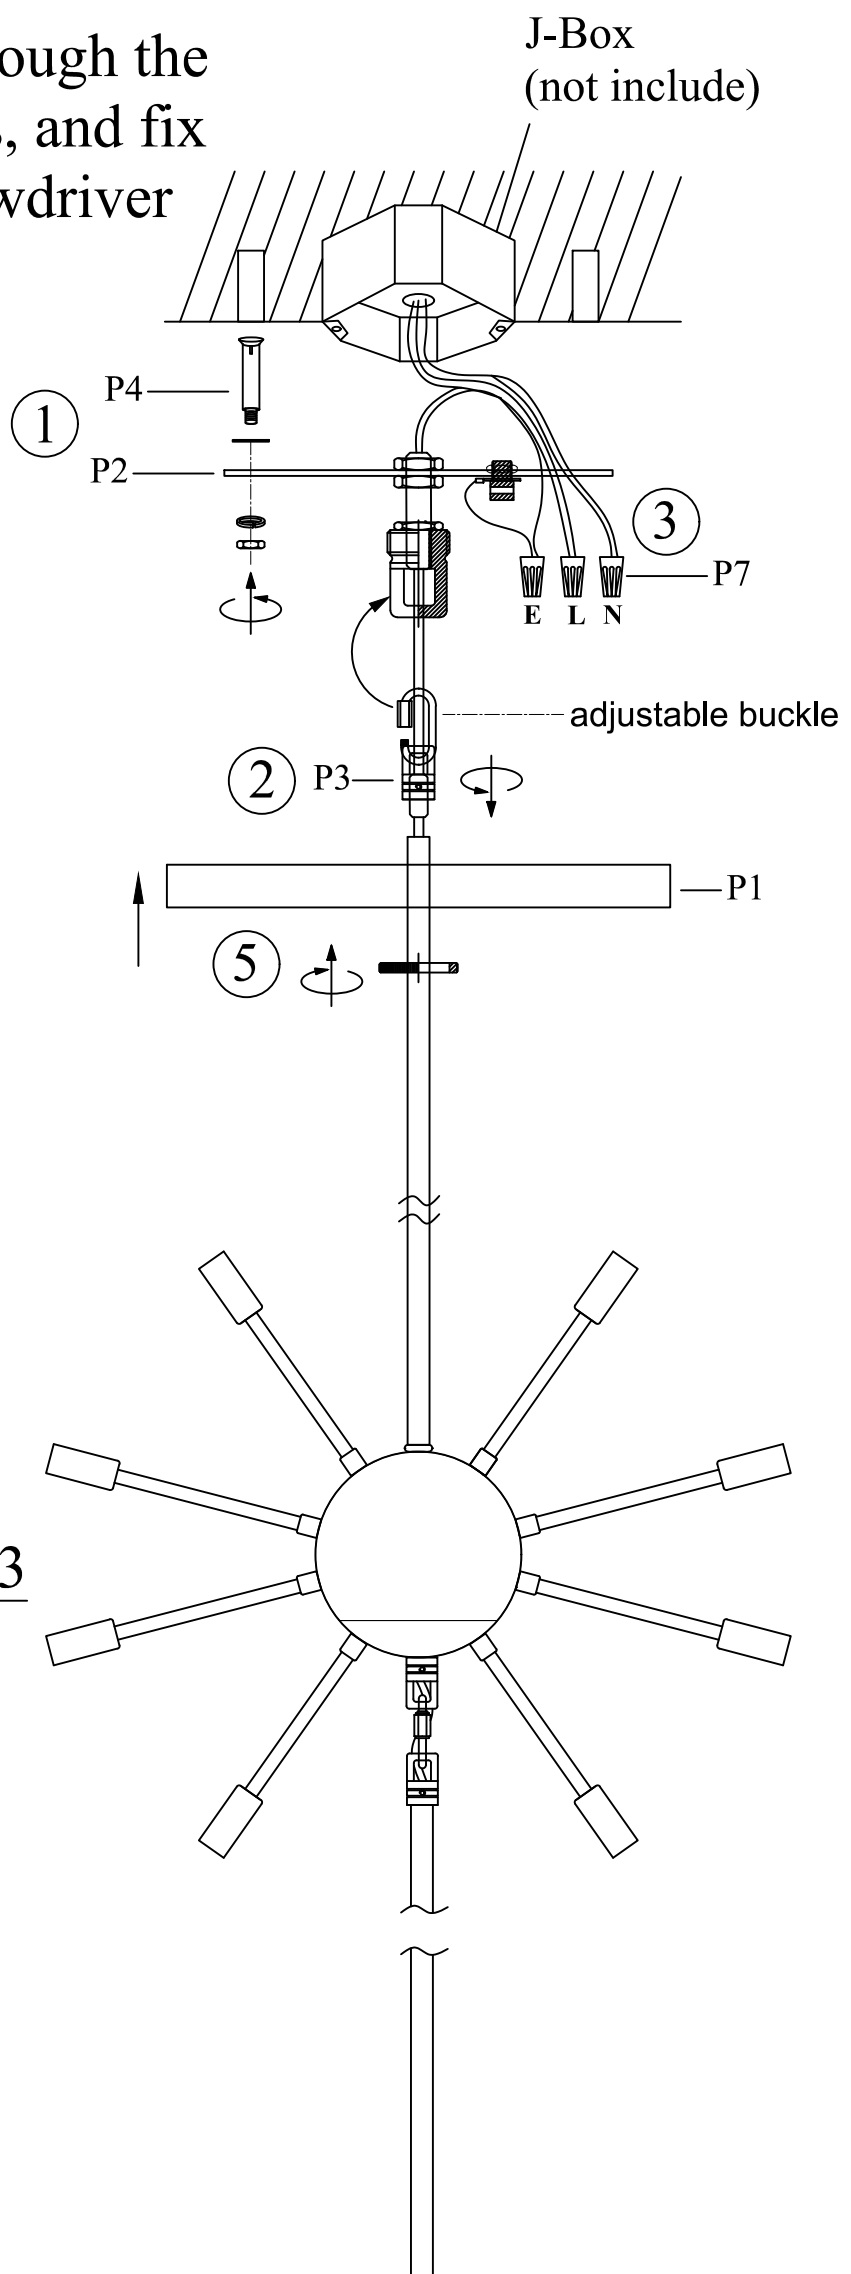


2500G44L3BK-3
lamp body

"L"=Hot wire
"N"=Neutral wire
"E"=GND

2500G44L3BK

Note:Test sockets with bulbs (Max 20W) before dressing the fixture!!!

# Canopy Instation Instrustion

①:Drill a 0.7" hole in the ceiling reinforcment to allow a $\frac{5}{8}''$ " threaded rod to pass through.

②: Attach the electrical box to the ceiling reinforcment and pass the $\frac{5}{8}''$ threaded rod through the box and secure it to the heavy duty hickey.

③:Pass the fixture wires and ground wire through the loop, canopy ring, center hole of canopy and the heavy duty hickey.

④:Lead the steel wire under the hanging plate, through the corresponding holes of the cylindrical iron parts, and fix the (P5)safety device and steel wire with a screwdriver according to the picture.

⑤:Pull ceiling wires down through the fixture box and make connection.

⑥:Screw loop only onto threaded pipe.

⑦:Hang the fixture on chain.

⑧:Secure the canopy with canopy ring.

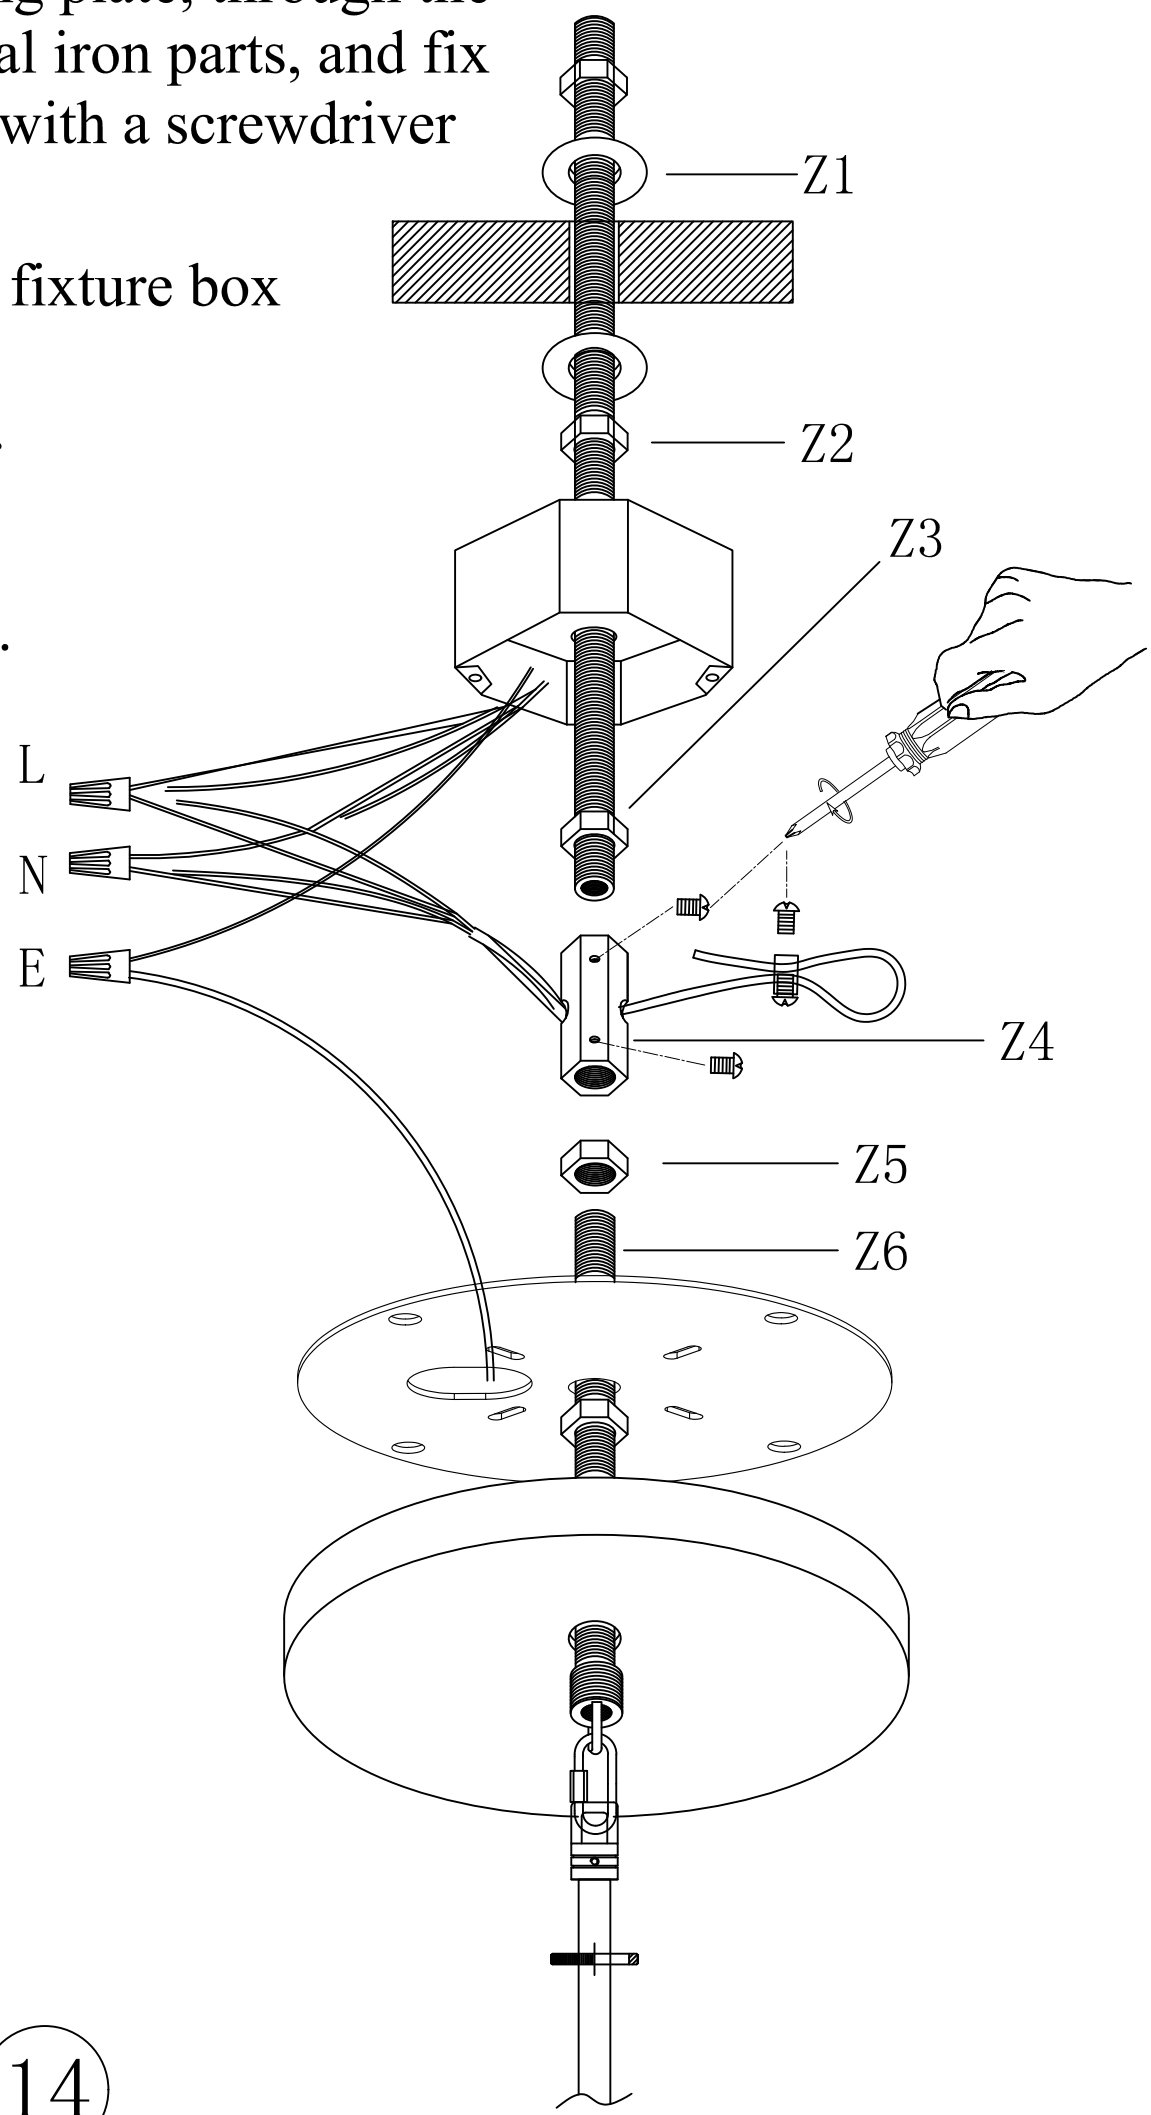


"L"=Hot wire
"N"=Neutral wire
"E"=GND

# 2500G44L3BK

Note:after you have assembled the three layers of the lamp body, you can proceed to the next assembly!



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves.So as to prevent any damage or smudging on the crystals.

## Step 4

Install the 2500G44L3BK-3 crystal first.

### 2500G44L3BK-3 Crystal PARTS LIST

| Parts Number | Part | Picture | Description | Qty |
|---|---|---|---|---|
| P-2500D44BK-A | A |  | (Metal bars+50# Multi-faceted crystal ball) Length 18.5″ | 46 |
| P-2500D44BK-B | B |  | (Metal bars+Metal Welding flower)Length 18.5″ | 91 |
| P-2500D44BK-C | C |  | (Metal bars+Metal Welding flower +Trapezoidal crystal)Length 18.5″ | 46 |

### 2500G44L3BK-3 Crystal Dressing Diagram

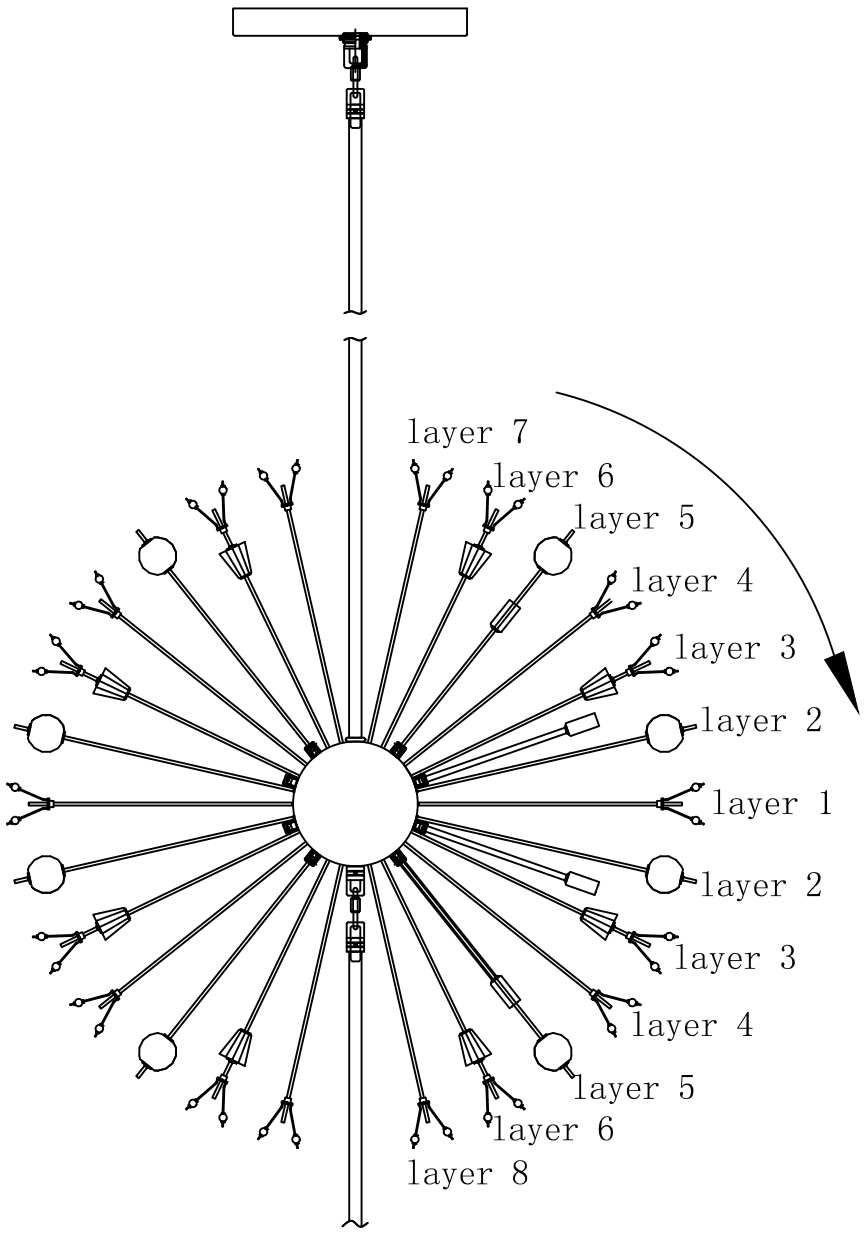


To facilitate your installation, install the crystal from top to bottom.

# 2500G44L3BK



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves.So as to prevent any damage or smudging on the crystals.

## 2500G44L3BK-3
## Crystal Dressing Diagram

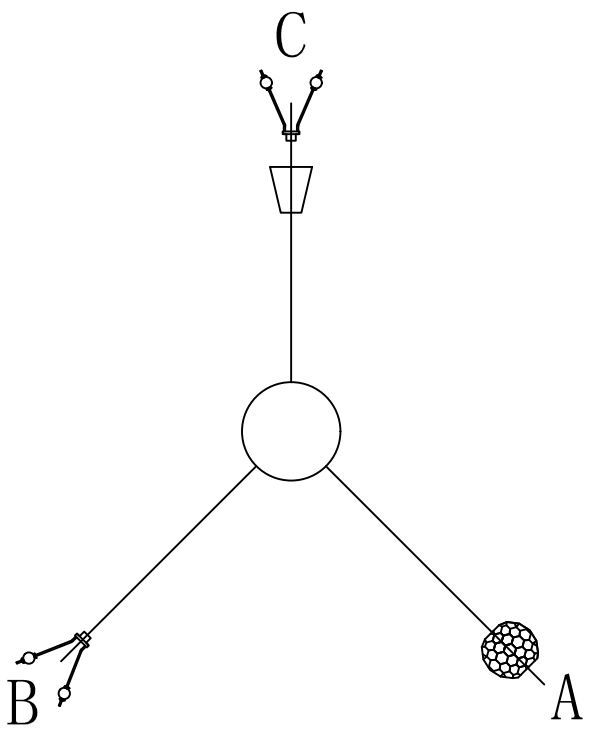


layer 7 Installation diagram

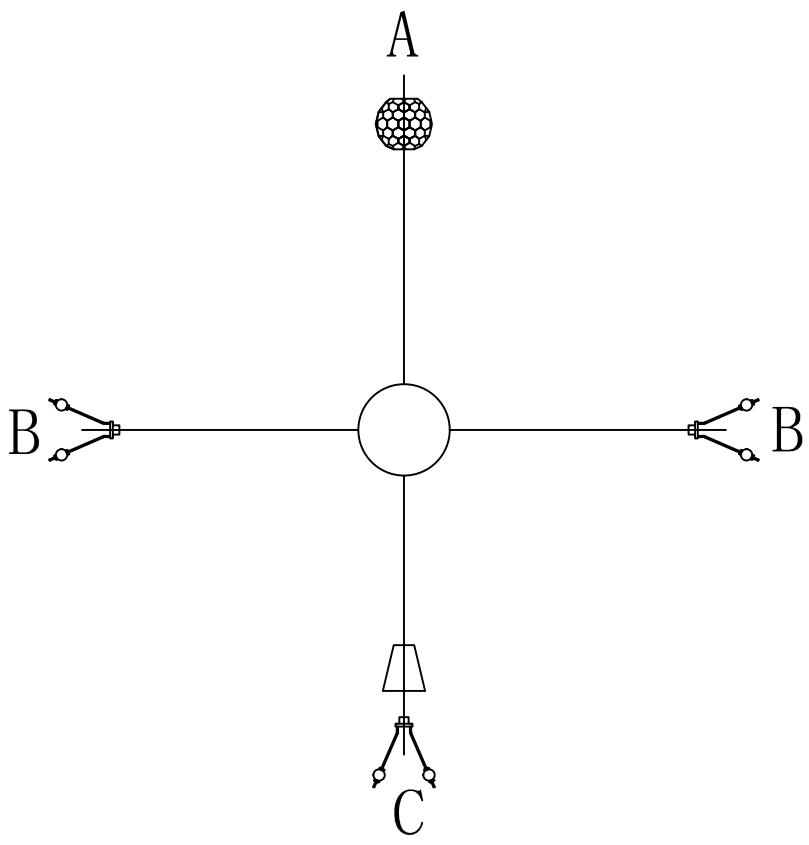


layer 8 Installation diagram

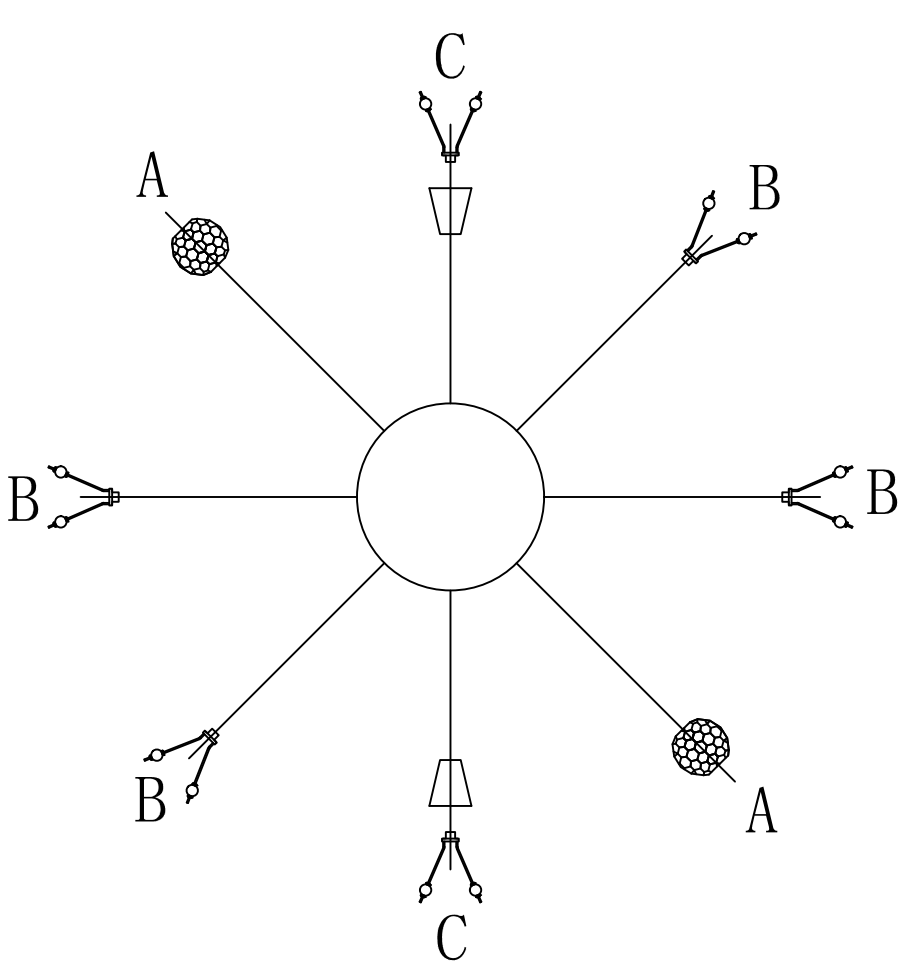


layer 6 Installation diagram

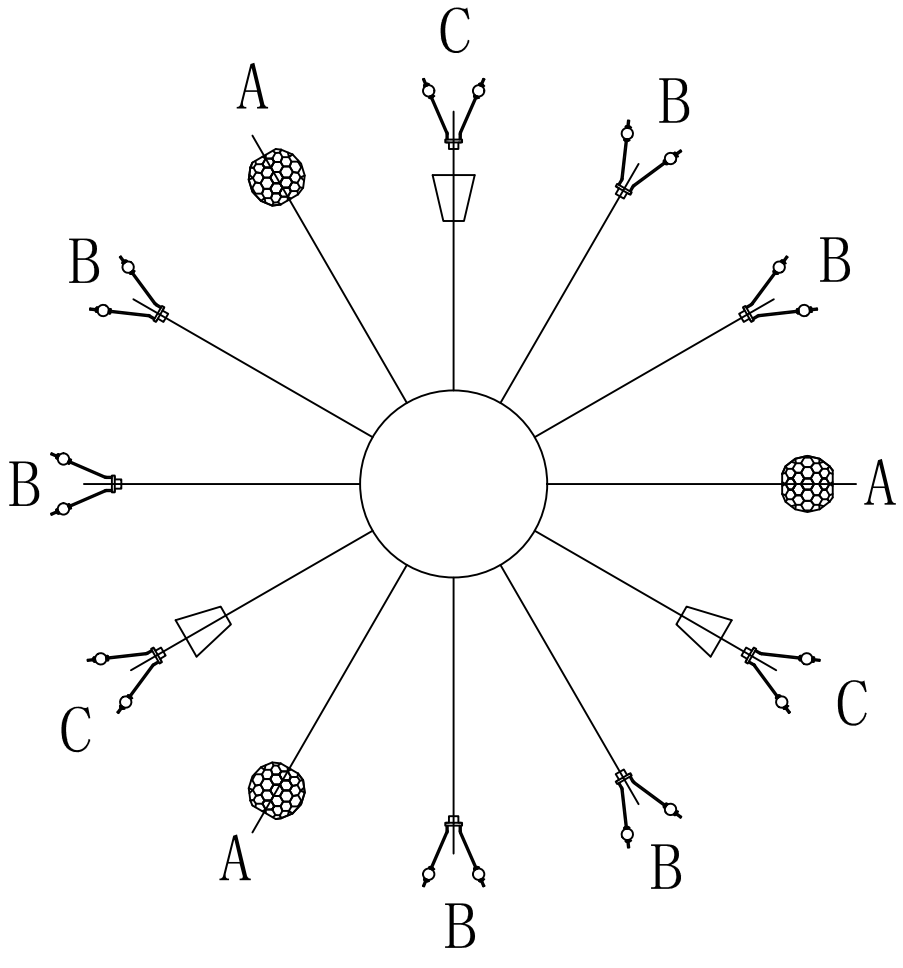


layer 5 Installation diagram

# 2500G44L3BK



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves.So as to prevent any damage or smudging on the crystals.

## 2500G44L3BK-3
## Crystal Dressing Diagram

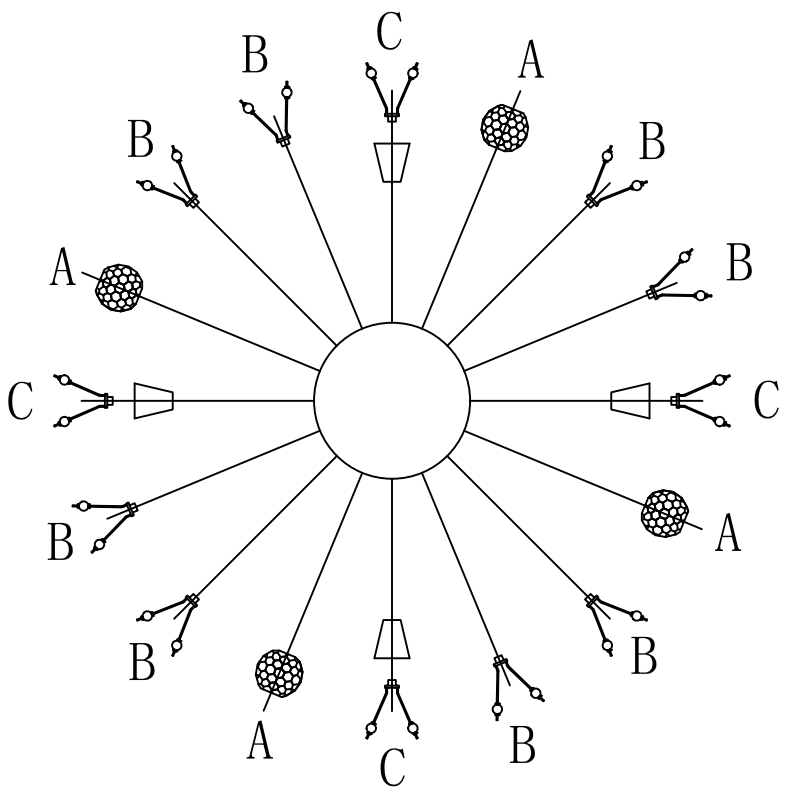


layer 4 Installation diagram

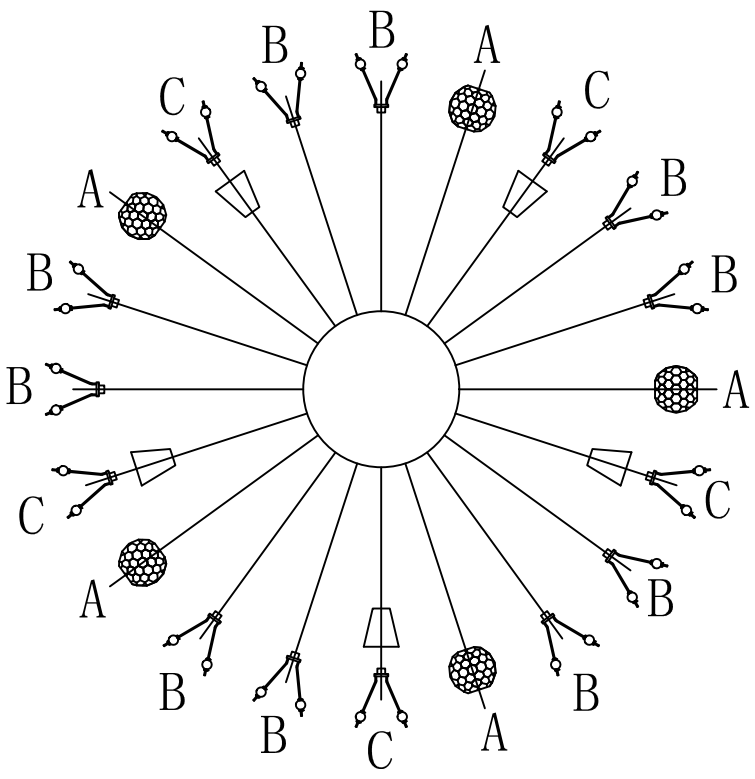


layer 3 Installation diagram

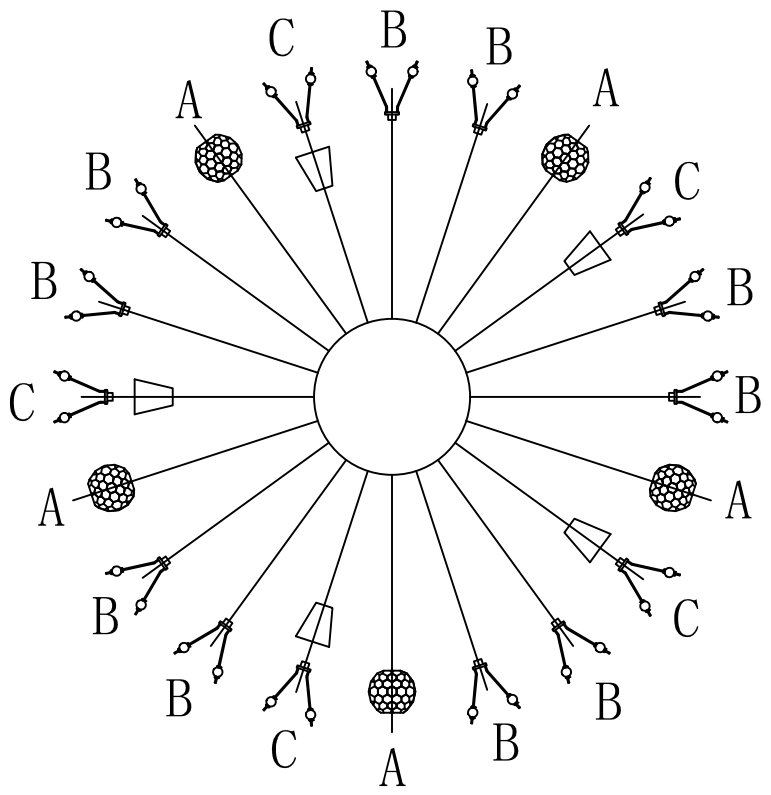


layer 2 Installation diagram

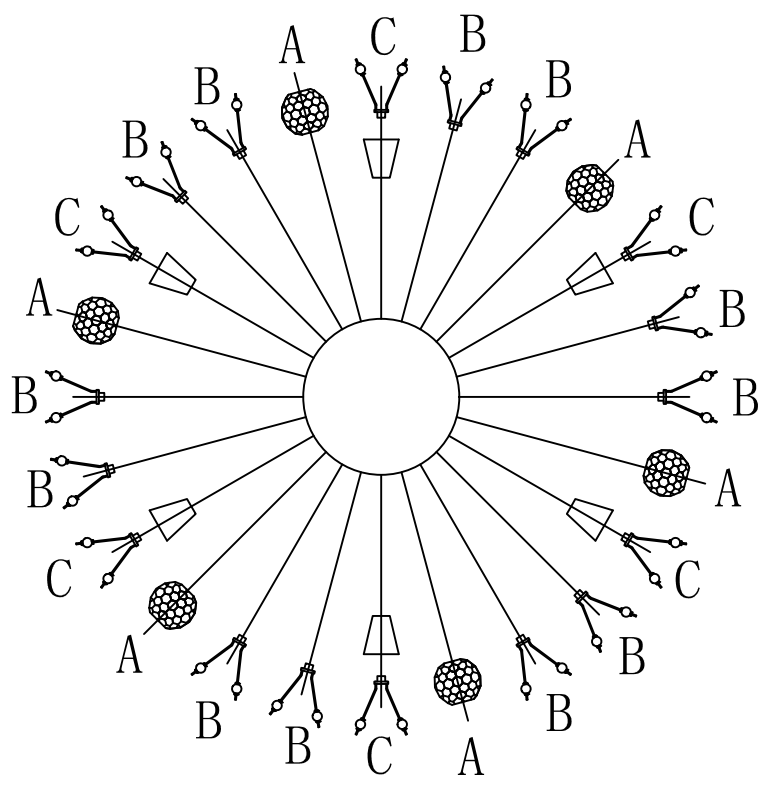


layer 1 Installation diagram

# 2500G44L3BK

Congratulations, you have completed the installation of 2500G44L3BK-3 lamp body and crystal.

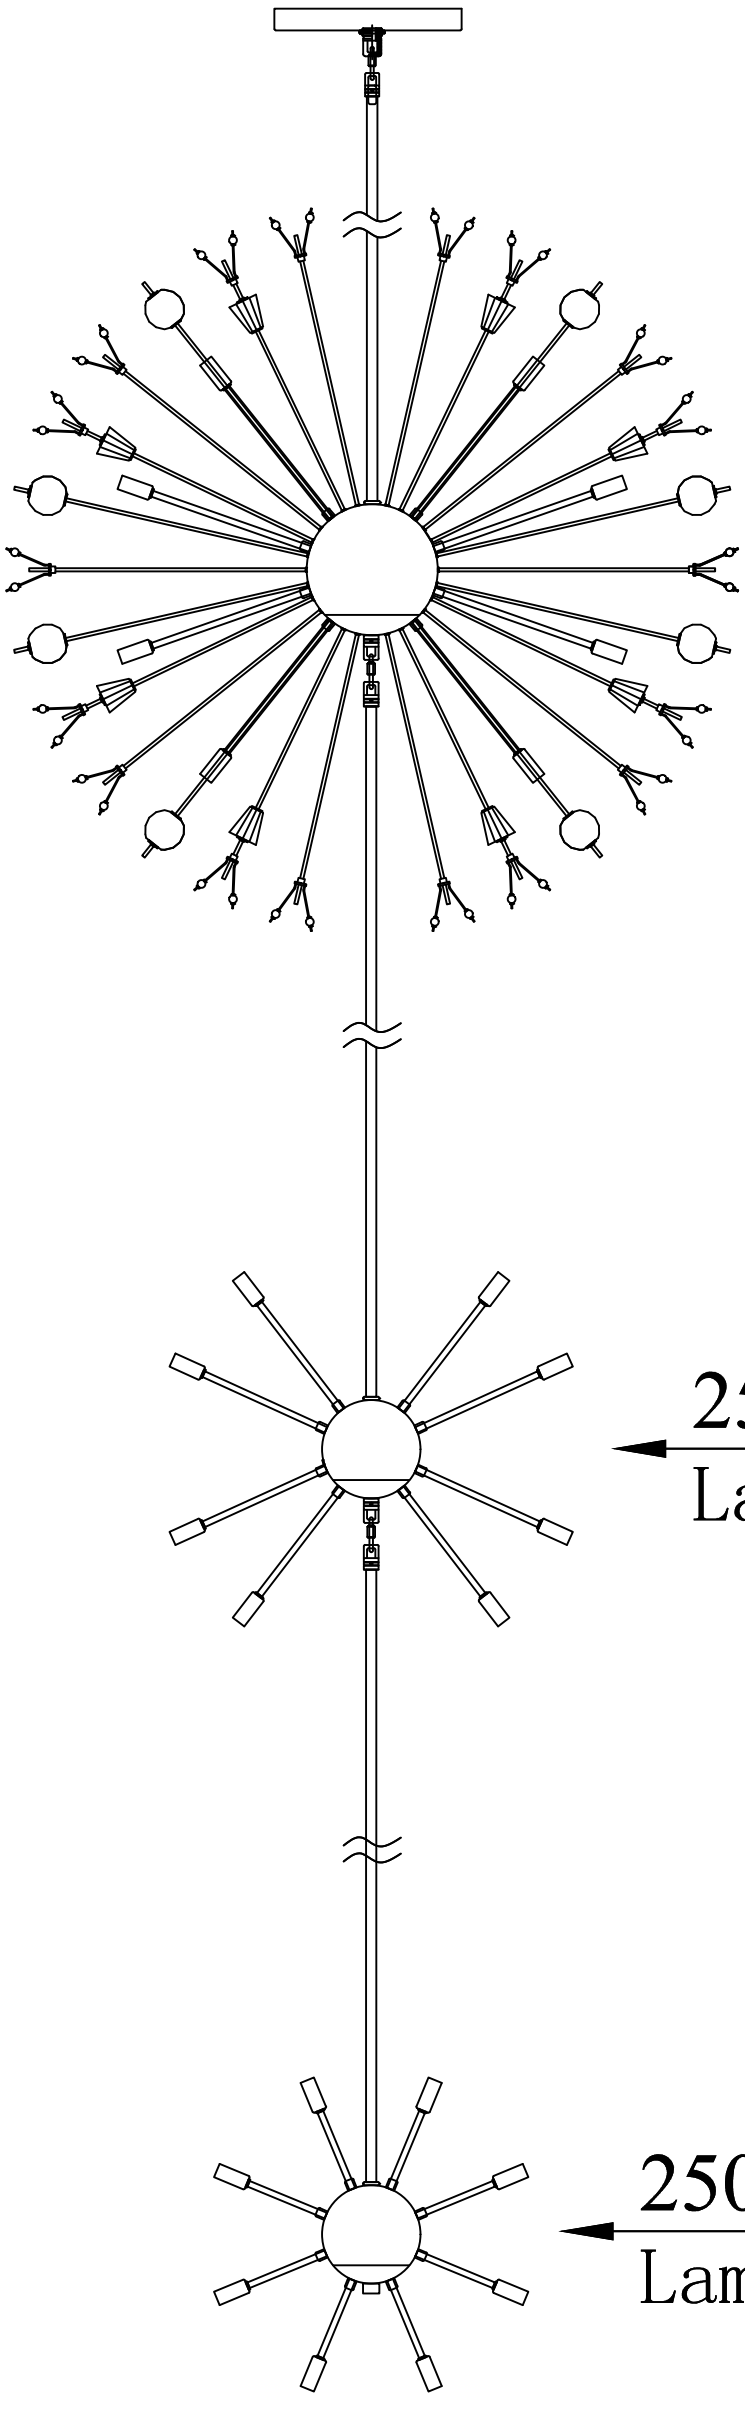

2500G44L3BK-3

Lamp body+Crystal

2500G44L3BK-2

Lamp body

2500G44L3BK-1

Lamp body

# 2500G44L3BK

Note:after you have assembled the three layers of the lamp body and crystal , you can proceed to the next assembly!



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves.So as to prevent any damage or smudging on the crystals.

## Step 5

Install the 2500G44L3BK-2 crystal .

### 2500G44L3BK-2 Crystal PARTS LIST

| Parts Number | Part | Picture | Description | Qty |
|---|---|---|---|---|
| P-2500D38BK-A | A |  | (Metal bars+50# Multi-faceted crystal ball) Length 16.33″ | 36 |
| P-2500D38BK-B | B |  | (Metal bars+Metal Welding flower)Length 16.33″ | 68 |
| P-2500D38BK-C | C |  | (Metal bars+Metal Welding flower +Trapezoidal crystal)Length 16.33″ | 35 |

### 2500G44L3BK-2
### Crystal Dressing Diagram

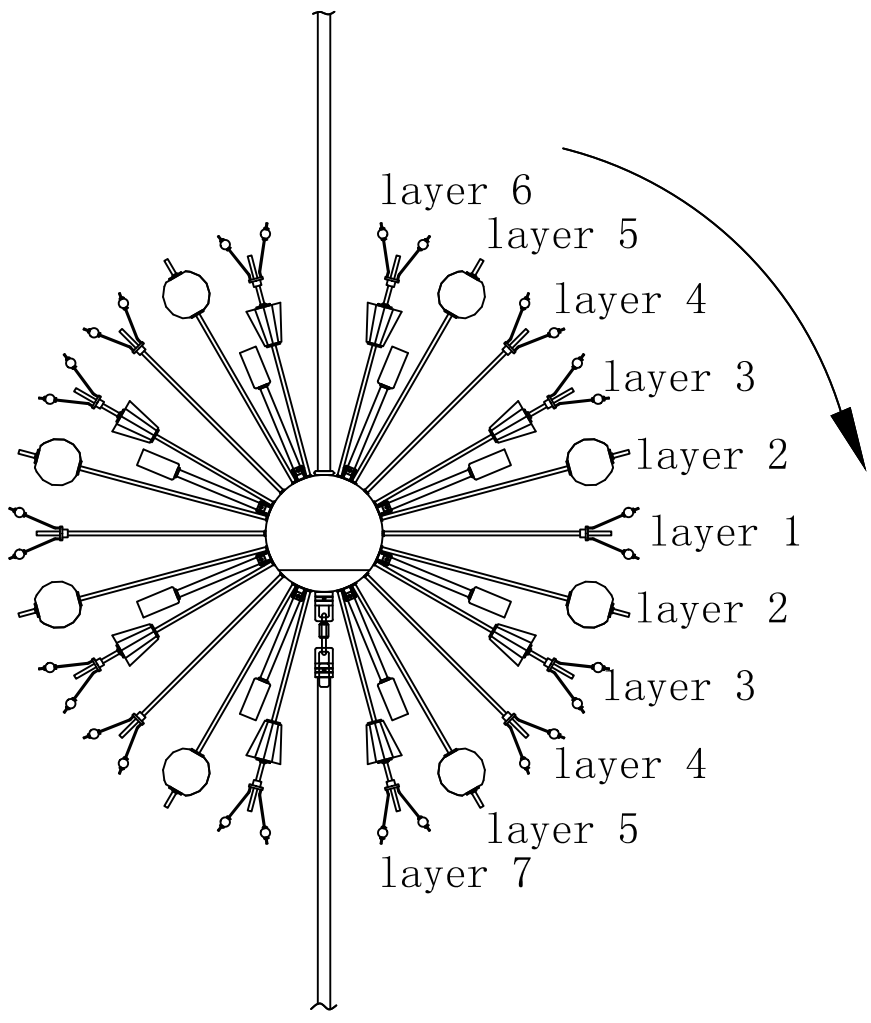


To facilitate your installation, install the crystal from top to bottom.

# 2500G44L3BK



## 2500G44L3BK-2
## Crystal Dressing Diagram

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves.So as to prevent any damage or smudging on the crystals.

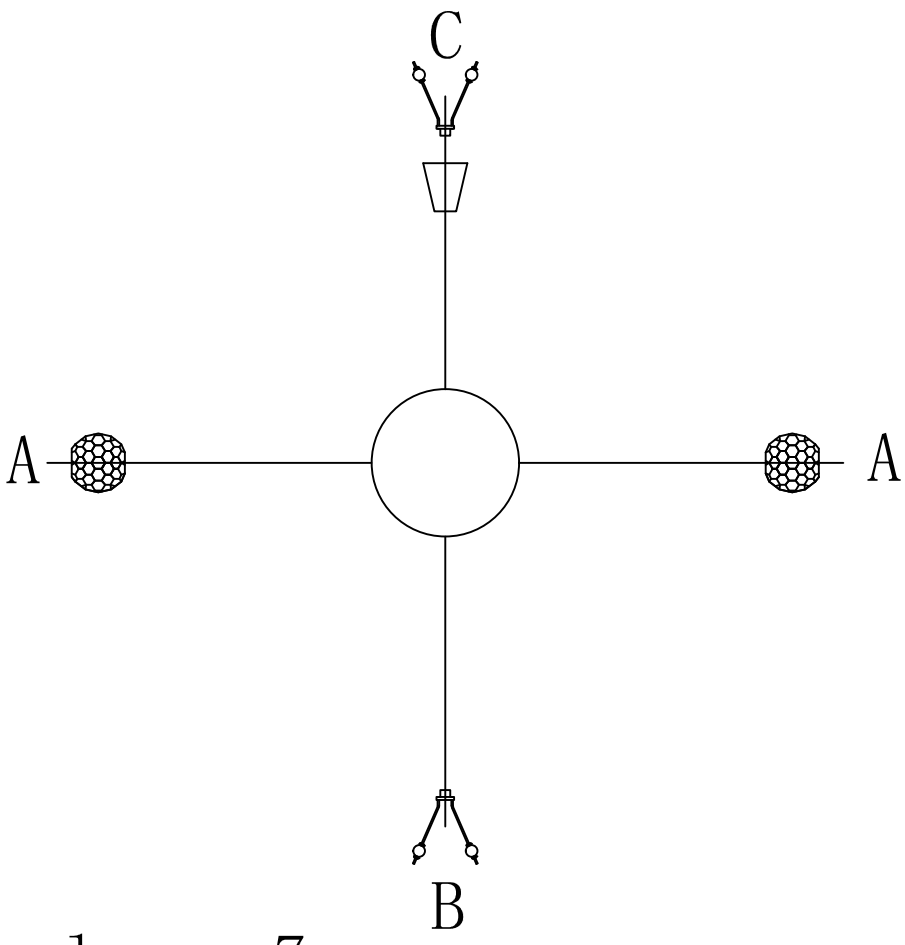


layer 7
Installation diagram

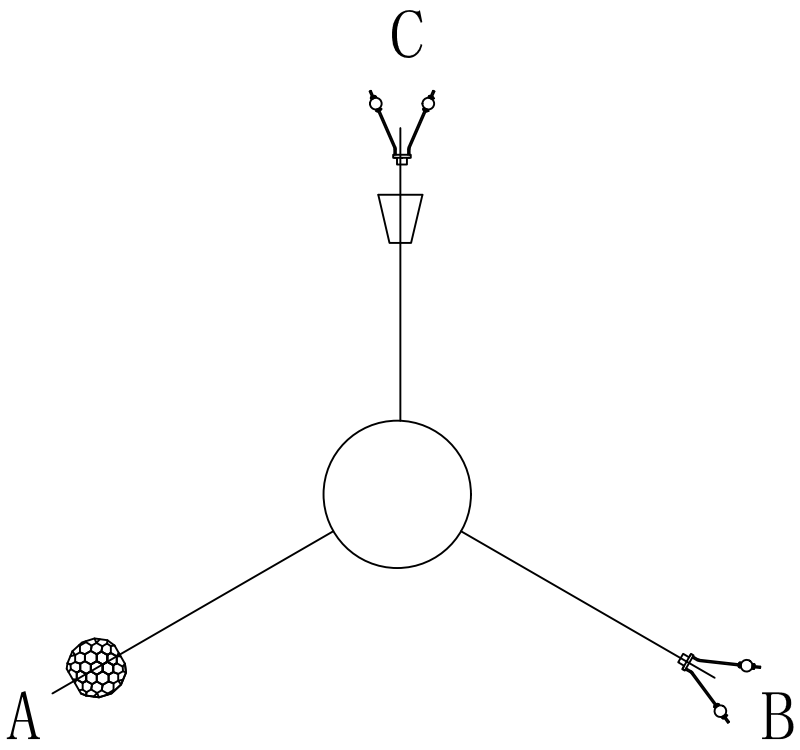


layer 6
Installation diagram

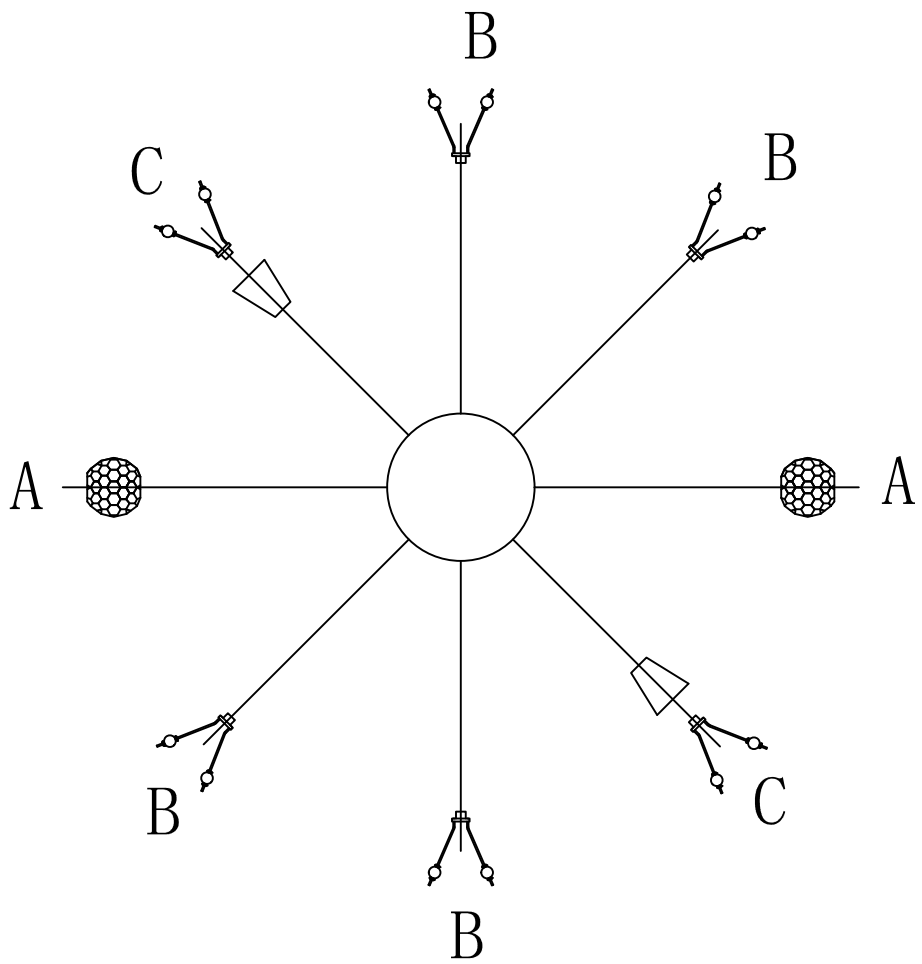


layer 5 Installation diagram

# 2500G44L3BK



## 2500G44L3BK-2
## Crystal Dressing Diagram

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves.So as to prevent any damage or smudging on the crystals.

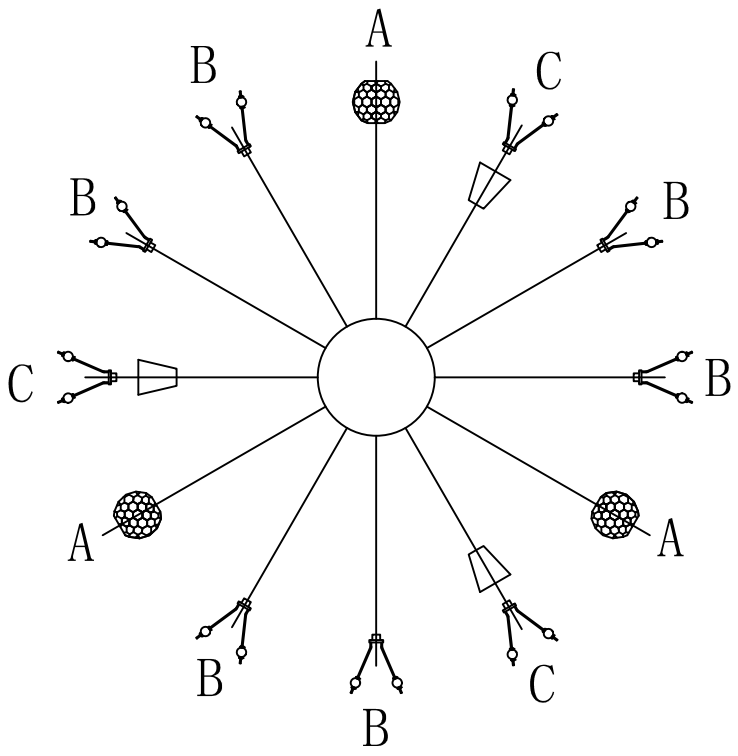


layer 4 Installation diagram

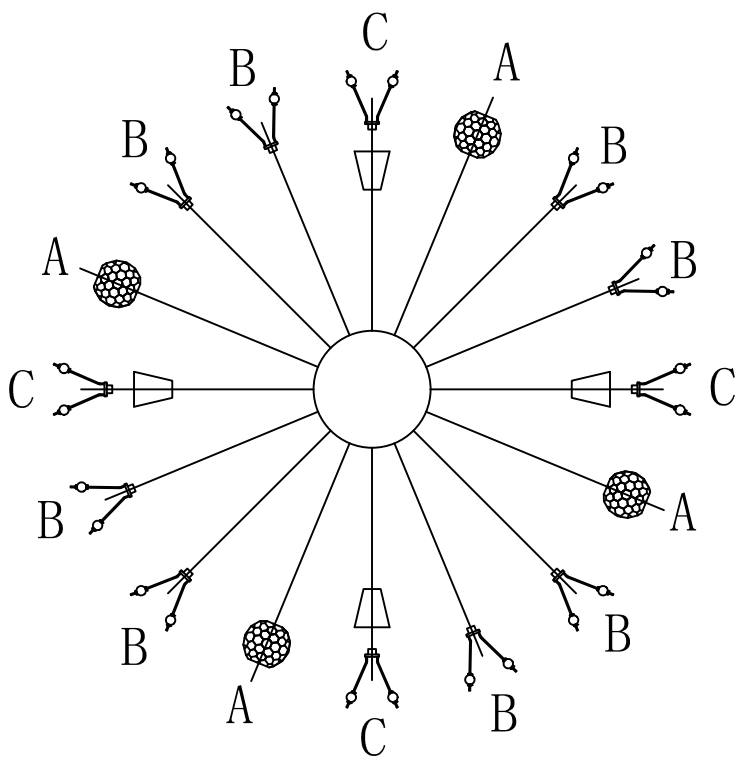


layer 3 Installation diagram

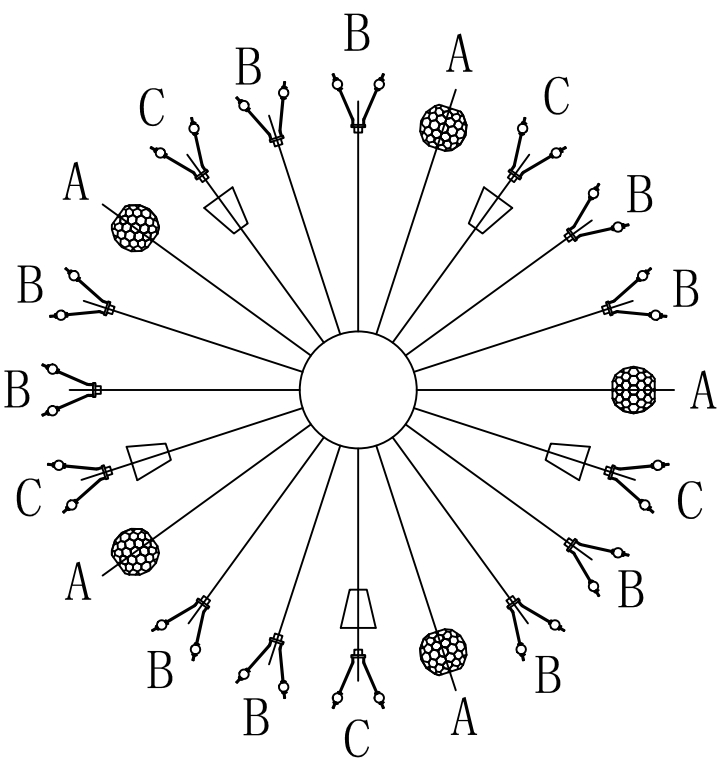


layer 2 Installation diagram

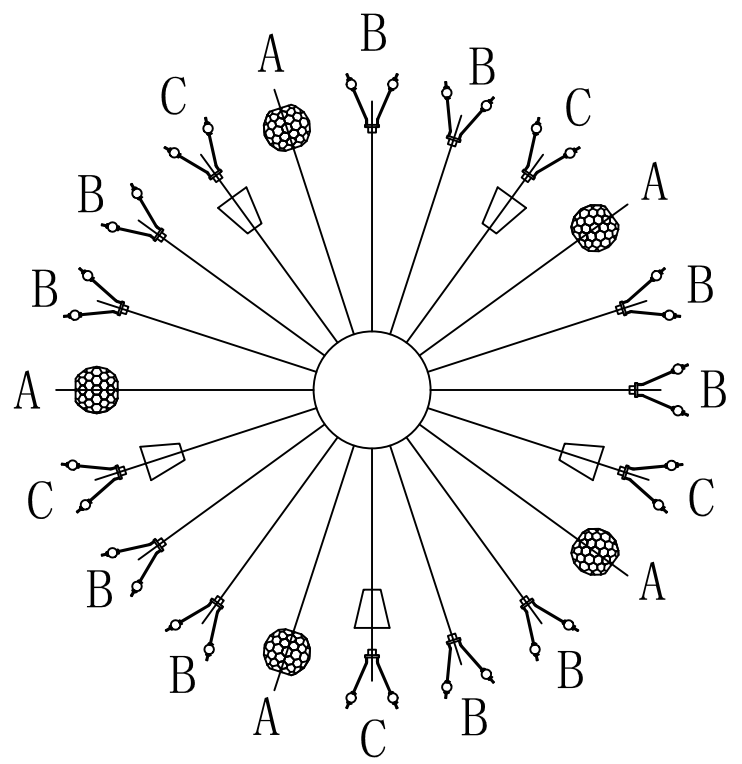


layer 1 Installation diagram

# 2500G44L3BK

Congratulations, you have completed the installation of 2500G44L3BK-2 lamp body and crystal.

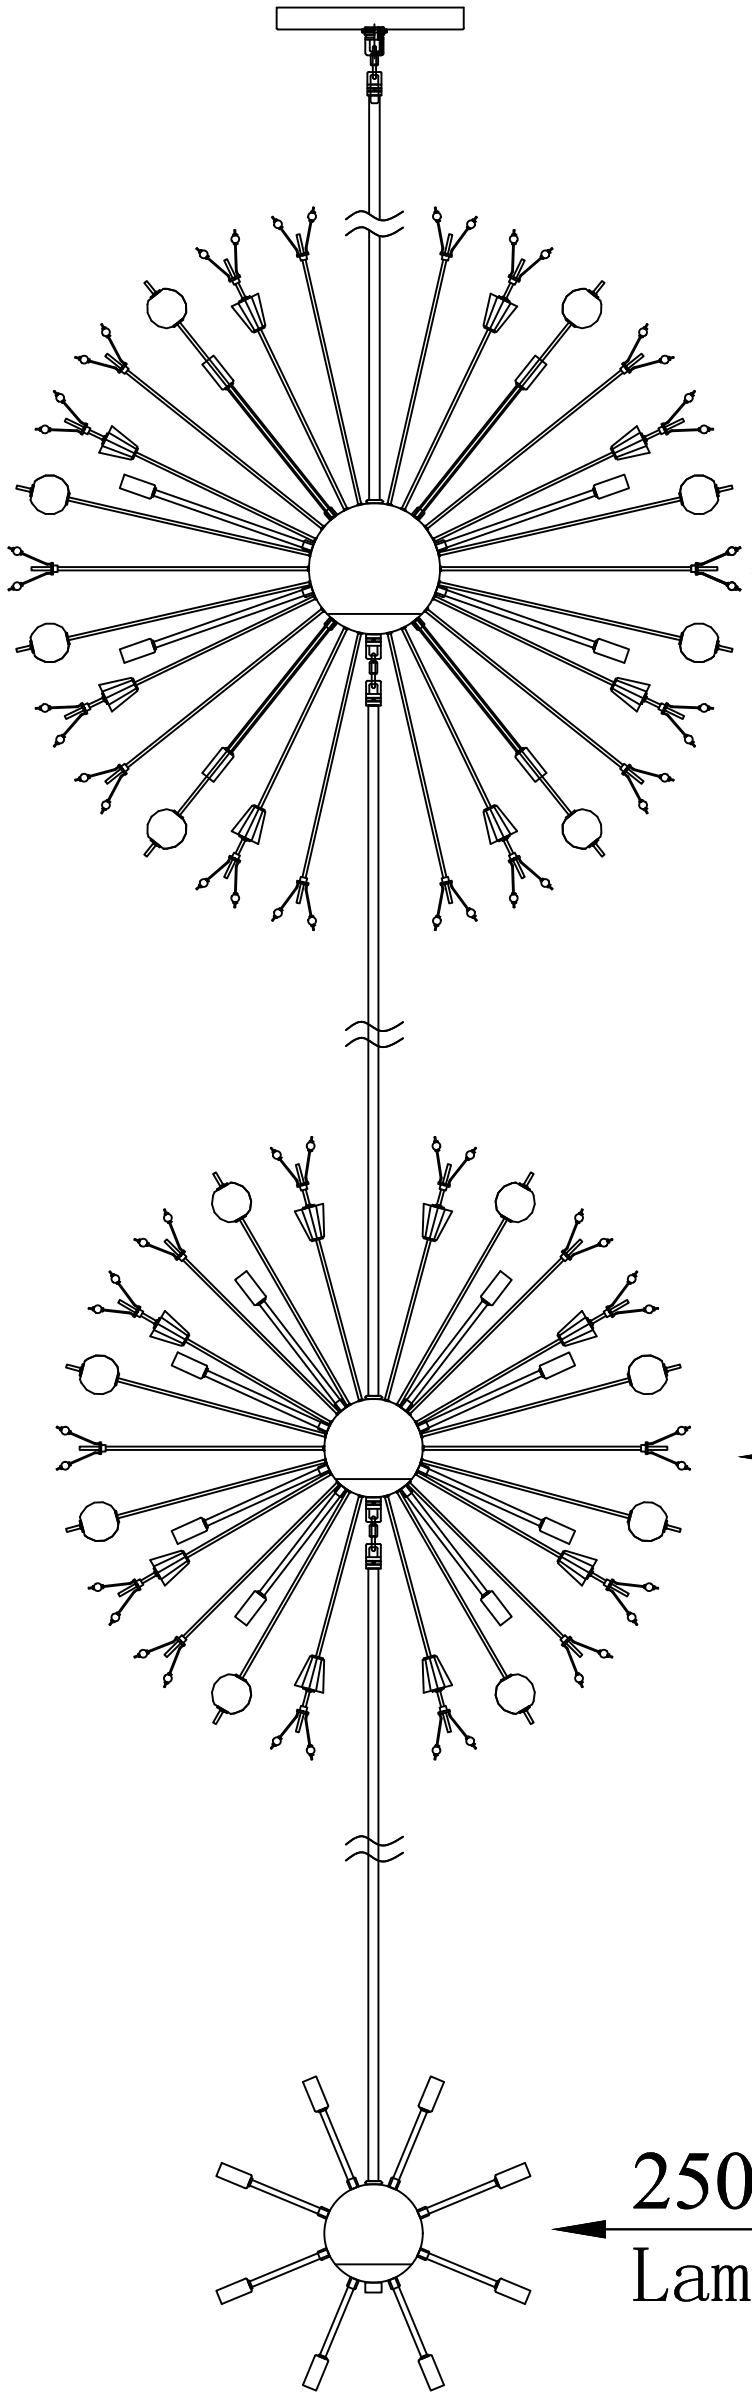

# 2500G44L3BK

Note:after you have assembled the three layers of the lamp body and crystal , you can proceed to the next assembly!



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves.So as to prevent any damage or smudging on the crystals.

## Step 6

Install the 2500G44L3BK-1 crystal .

### 2500G44L3BK-1 Crystal PARTS LIST

| Parts Number | Part | Picture | Description | Qty |
|---|---|---|---|---|
| P-2500D32BK-A | A |  | (Metal bars+50# Multi-faceted crystal ball) Length 13.40″ | 36 |
| P-2500D32BK-B | B |  | (Metal bars+Metal Welding flower)Length 13.40″ | 62 |
| P-2500D32BK-C | C |  | (Metal bars+Metal Welding flower +Trapezoidal crystal)Length 13.50″ | 14 |
| P-2500D32BK-D | D |  | (Metal bars+Metal Welding flower) Length 12.80″ | 1 |

### 2500G44L3BK-1
### Crystal Dressing Diagram

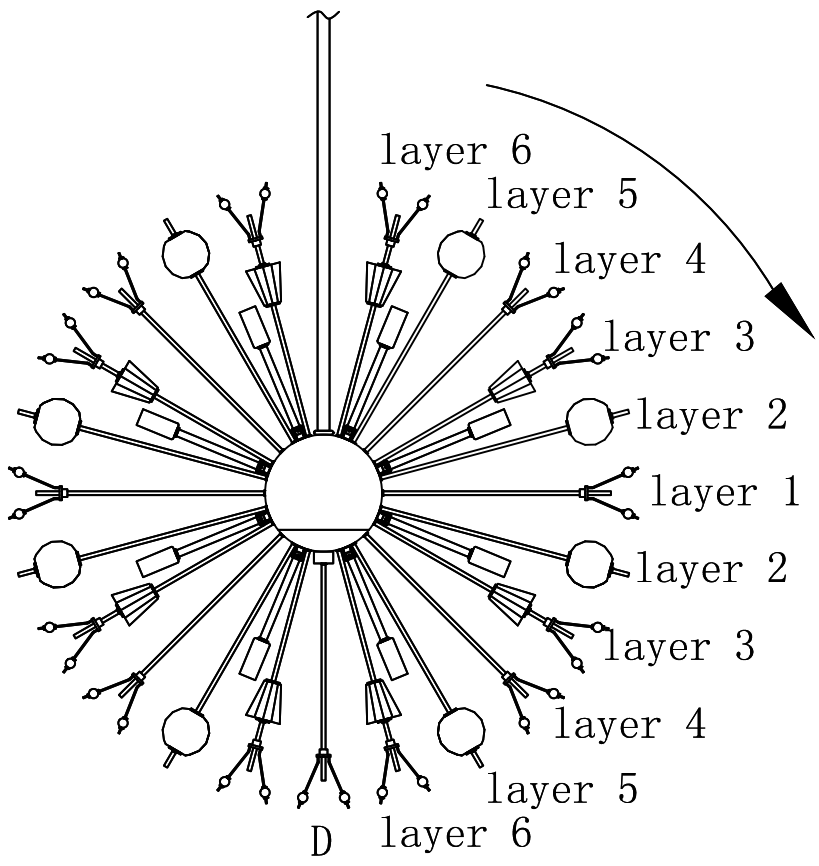


1. First find the holes corresponding to D, and screw on the crystals corresponding to D.

2.To facilitate your installation, install the crystal from top to bottom.

# 2500G44L3BK



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves.So as to prevent any damage or smudging on the crystals.

## 2500G44L3BK-1
## Crystal Dressing Diagram

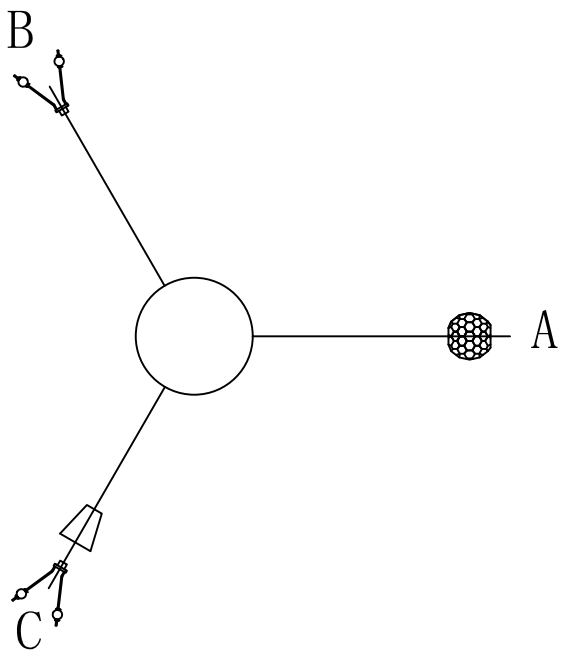


layer 6 Installation diagram

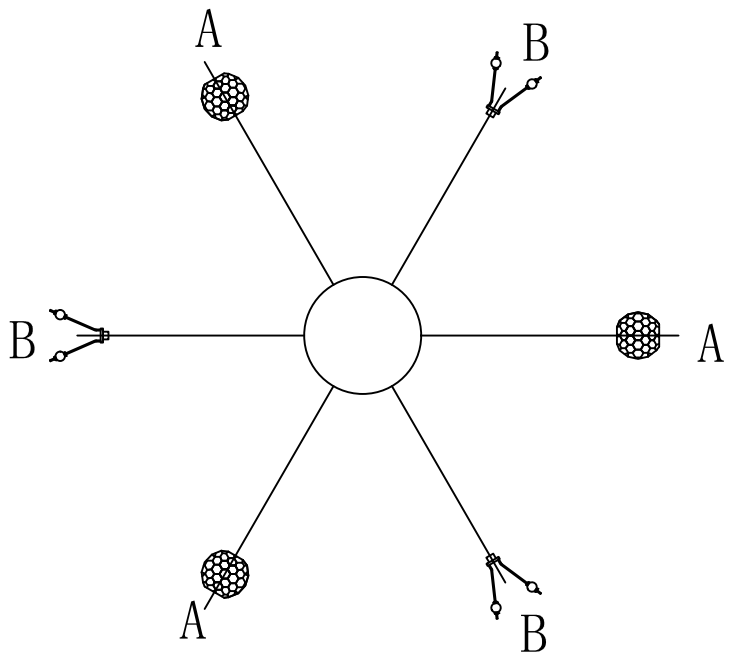


layer 5 Installation diagram

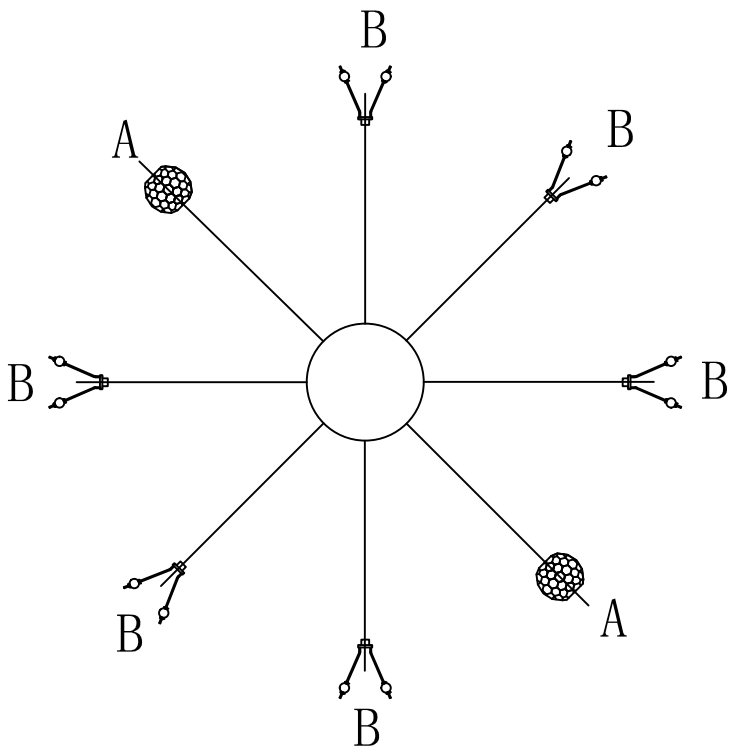


layer 4 Installation diagram

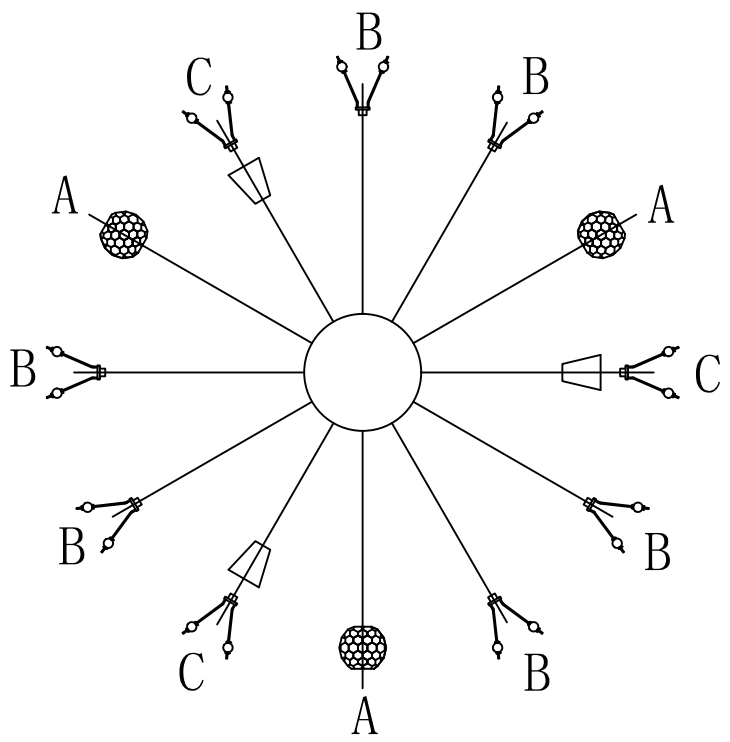


layer 3 Installation diagram

# 2500G44L3BK



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves.So as to prevent any damage or smudging on the crystals.

## 2500G44L3BK-1
## Crystal Dressing Diagram

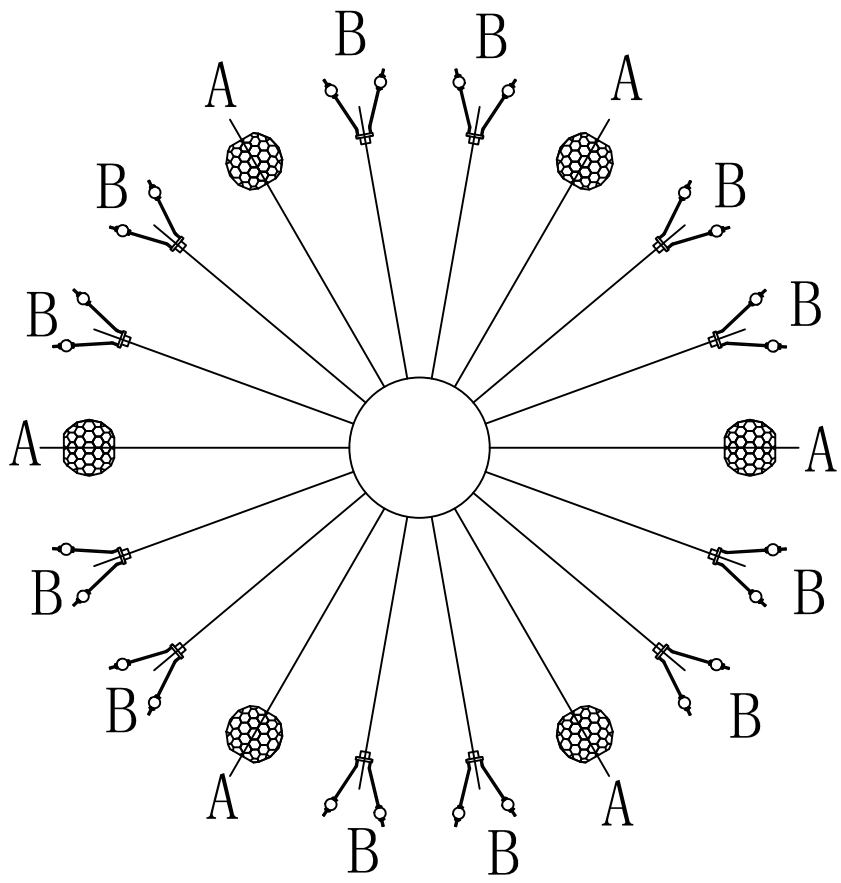


layer 2 Installation diagram

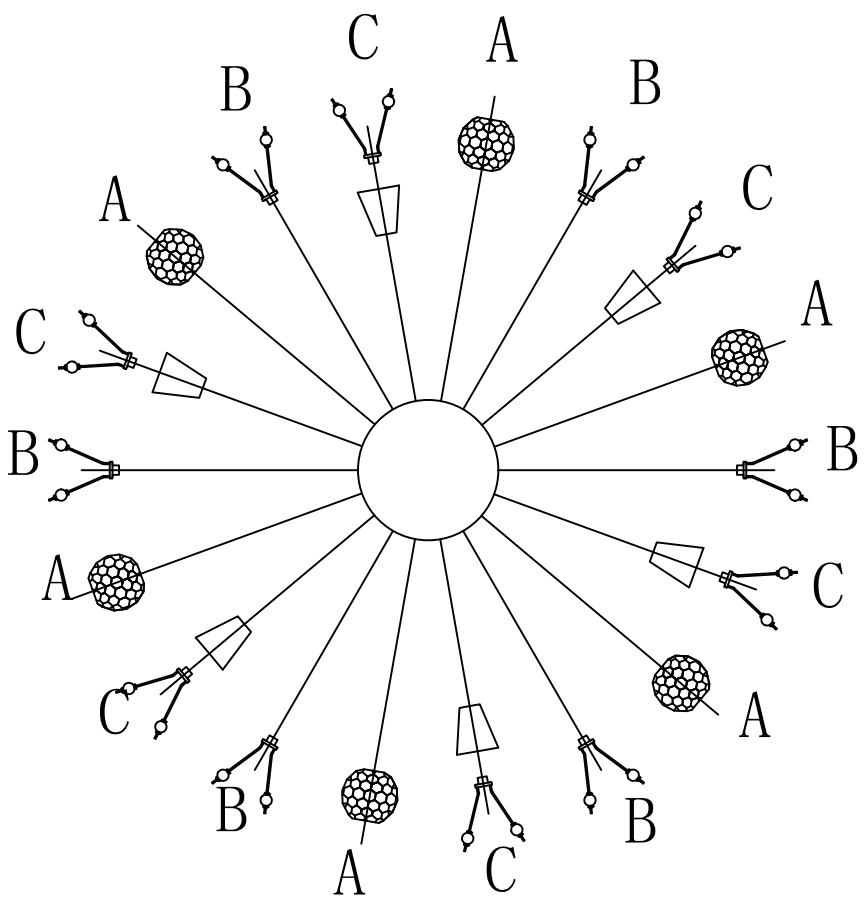


layer 1 Installation diagram

# 2500G44L3BK

Congratulations, you have completed the installation of the three layers of lamp body and crystal.

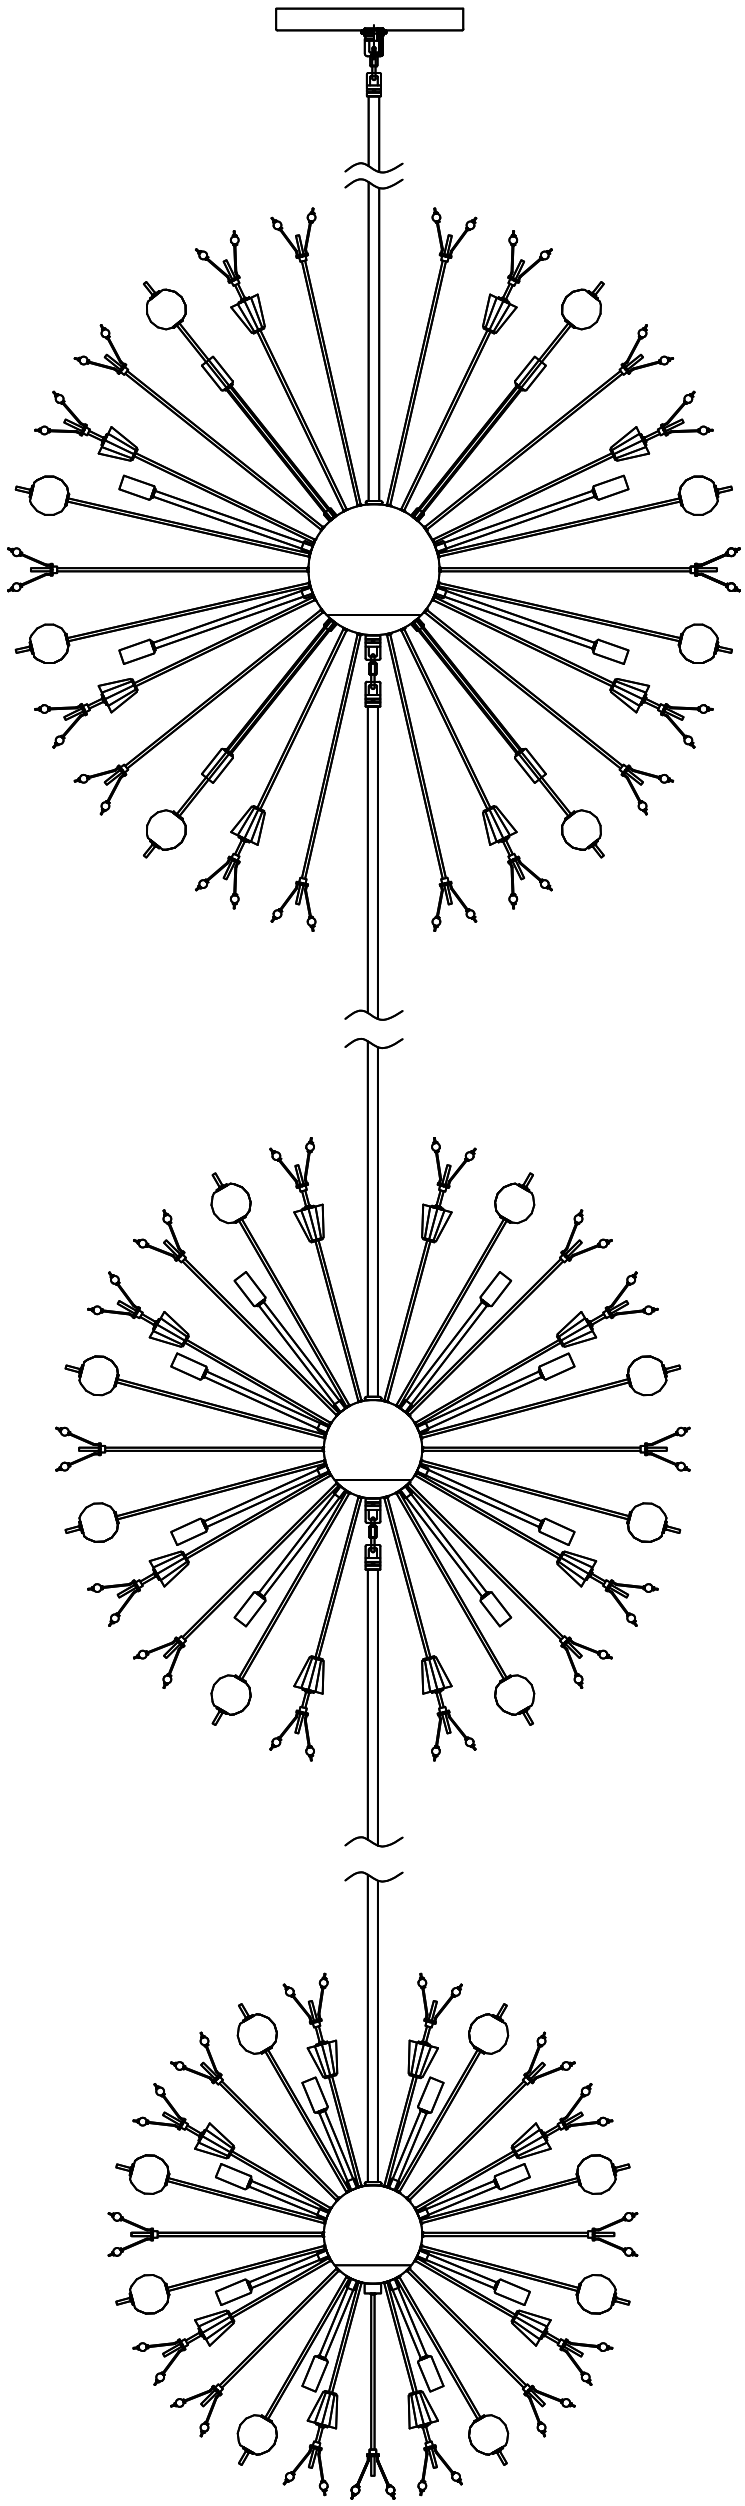

# Congratulations !

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

## Cleaning and Maintenance of Chandelier Frame

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth.Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

## Cleaning and Maintenance of Crystals

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

## To Order Crystal Replacement Parts

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us . For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle . You will be contacted with prices prior toshipment. All orders must be pre-paid.

## Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department.
A written return authorization form will be sent to you with specific instructions.

# Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department .Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reseserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warrantee, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.