


PATHFINDER I LED Outdoor Wall Mount

52120 / 52120PHC

- Aluminum & Glass
- 3000K Color Temperature
- CRI 90
- Wet Location
- 120-277V input
- Photocell option available
- Dark Sky option available

Job Name : _____
Job Type : _____
Quantity : _____
Comments : _____

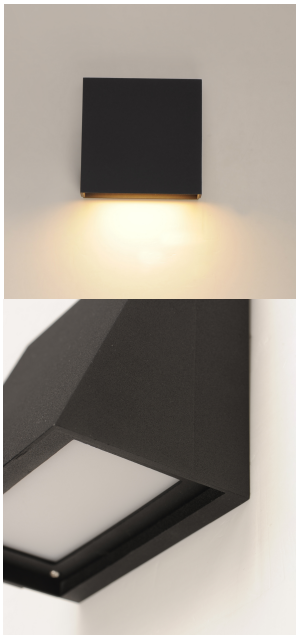

PRODUCT DESCRIPTION

With solid Die-Cast Aluminum construction and powered by a range voltage input driver, Pathfinder is a high performance down light for commercial and residential installations. Choose from triangular or spherical profiles as they discreetly extend from the wall. Available with a photocell option, these archetypal forms purposely blend into the architectural landscape creating safer spaces that shine light on locations of interest. Available in Black, Architectural Bronze, or Metallic Silver

- Always consult a qualified electrician before installing any lighting product
- Installation Requirements:
Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding at least 35 lbs

FINISHES OPTION

- Architectural Bronze
- Black
- Silver

*Photocell option available in Architectural Bronze only

MATERIAL

Aluminum,Glass

RATINGS

cETLus
Wet Location
JA8 Listed ADA
DARKSKY



ADDITIONAL


INSTALL UP/DOWN: UP
OPERATING TEMPERATURE:
-20°C (-4°F), 40°C (104°F)
PHOTOMETRIC: Report Found Online

MEASUREMENTS

DIMENSION : 5.5" W x 5.5" H x 4" Ext
BACK PLATE : 5.5" W x 5.5" H x 2.75" HCO
HANGING WEIGHT : 2.03 lb

LAMPING

INPUT VOLTAGE : 120-277V
LUMENS : 1,270 Rated (820 Del.)
BULB : 1 x 15W LED PCB Integrated , 15W Total
BULB INCLUDED : (Integrated)
DIMMABLE : Yes
CRI : 90 CRI
COLOR_TEMP : 3000K

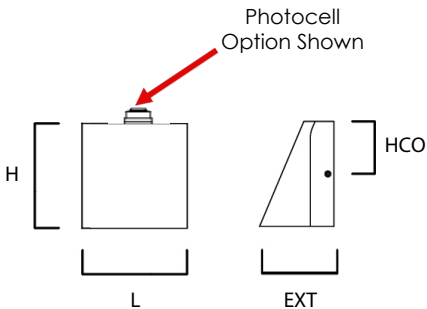

WESTERN DISTRIBUTION CENTER (HEADQUARTER)
253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746
EASTERN DISTRIBUTION CENTER
101 GARDNER PARK | PEACHTREE CITY, GA 30269
P. 626.956.4200 | F. 626.956.4225 | maximlighting.com