

Arch LED

Wall Mounted • Damp Location Listed **PROGRESS LED**

Description:

Arch LED Collection Two-Light Brushed Nickel Etched Glass Modern Bath Vanity Light

Specifications:

- Etched Glass Shade
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 6.3125 in W., 4.75 in ht., 0.75 in depth
- Mounting backplate for outlet box included
- 6 in of wire supplied
- Americans With Disabilities Act (ADA) compliant

Performance:

Number of Modules	2
Input Power	10 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	1,057/52 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Warranty	5-year Limited Warranty
Labels	cETLus Damp Location Listed
	Meets California Title 24 JA8-2019

P300290-009-30



Dimensions:

Width: 13 in
Depth: 3-7/16 in
Height: 5 in
H/CTR: 2-1/2 in


Etched Glass Shade
Width: 5-5/16 in
Height: 0-1/8 in



Photometrics:

ELECTRICAL DATA	P300290-009-30
Input Voltage	120 V
Input Frequency	60 Hz
THD	<20%
EMI/RFI	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

P300290-009-30
 LED Light Engine: 3000 K 90 CRI
 System Wattage: 10
 Fixture delivered lumens: 983
 Fixture Efficacy: 48.7
 Spacing Criteria: 3.99 | 2.11 | 1.15

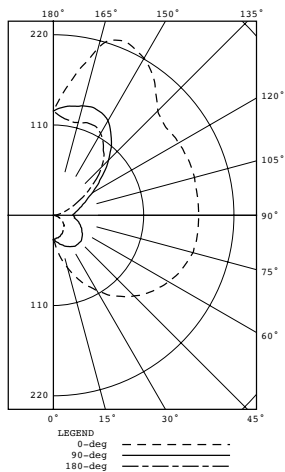

Test 19.01181 Test Date 06/25/19

P300290-009-30

CANDELA DISTRIBUTION						ZONAL LUMEN SUMMARY			
CANDELA	DISTRIBUTION					FLUX	ZONE	LUMENS	%FIXT
	0.0	45.0	90.0	135.0	180.0		0-30	39	4.0
0	30	30	30	30	30		0-40	75	7.6
5	40	37	32	29	29	3	0-60	182	18.5
15	66	55	37	29	27	12	0-90	383	39.0
25	94	74	42	28	25	24	90-120	218	22.2
35	119	91	46	25	22	36	90-130	300	30.5
45	139	105	46	20	18	48	90-150	473	48.2
55	155	116	43	15	14	58	90-180	600	61.0
65	168	123	38	10	9	65	0-180	983	100.0
75	176	128	32	5	4	68			
85	177	127	26	1	0	68			
90	177	127	24	0	0				
95	177	127	26	3	3	69			
105	178	128	33	12	11	72			
115	177	129	45	27	26	76			
125	175	131	67	50	52	82			
135	180	145	95	76	83	87			
145	210	174	122	100	106	87			
155	227	194	138	112	120	71			
165	211	183	138	116	117	43			
175	152	145	132	122	120	13			
180	127	127	127	127	127				

Dimming Notes:

P300290-009-30 is designed to be compatible with many Triac/Forward Phase ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Leviton_SureSlide 6672

Leviton_SureSlide 6674

Lutron_Nova T VTELV-300

Lutron_Diva DVELV-300P

Lutron_Diva DVCL-253P

Lutron_Toggler TGCL-153PH-WH

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

P300290-009-30