

Project:


Purolinear 360 LED Wall Bar

SKU: 23QSKSR24R120PHA

A system of linear tubes, set within the geometry of surface-mounted cylinder brackets, rotate individually to direct the LED illumination in 360 degrees along their axis. Set on a wall, in line behind a bed, the rotatable luminaires provide the variability of direct or indirect illumination. Arranged in a linear pattern or along a single path, the possibilities for compositions are endless and unlimited in scalability.

For additional options and pricing, contact our Contract Sales Team at quotes@sonneman.com

Learn more: <https://sonnemanlight.com/purolinear-360-led-wall-bar>

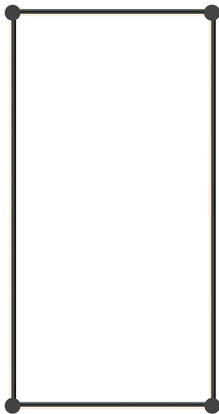

Dimensions

Height	48.75"
Width	26.75"
Extends	2.75"
Minimum Extension	2.75"
Maximum Extension	2.75"
Shape	Rectangle
Size	24"/48"
Canopy/Backplate/Base	2"

Electrical Specs

Bulb(s) Included?	Yes
Bulb 1 Type	Integral LED
Total LED, Bulb or Socket Count	2
Input Voltage	100-277VAC
Wattage	13
Initial Lumens	3620
Delivered Lumens	2590
Kelvin	3000K
CRI	90
Power Supply Type	Driver
Power Supply Quantity	1
Power Supply Location	Remote
Dimming Type	TRIAC/ELV/0-10V

Installation

Installation	Licensed electrician required
--------------	-------------------------------

Diffuser(s), Shade(s) and Lens(es)

Diffuser Type	Optical Acrylic
Diffuser 2 Type	Optical Acrylic

General Listings

Color/Finish	Satin Black (.25)
Features	ADA Compliant, Damp Rated
Certification	C-ETL-US

Available Finishes

Available Finishes	Polished Chrome (.01), Satin Black (.25), Satin Chrome (.23), Satin White (.03)
--------------------	---

Available Color Temperatures

Available Color Temperatures	3000k
------------------------------	-------