

Installation manual for

6200G36L3BK

Dimensions : D36" H110.5" L46

Collection : Serephina

Bulb Type : G9 bulb not included

Lamp Frame Weight: 55 LBS

Total Weight : 106.5 LBS



Thank you for choosing our product(s).


Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer Where the purchased was made.



SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

CAUTION

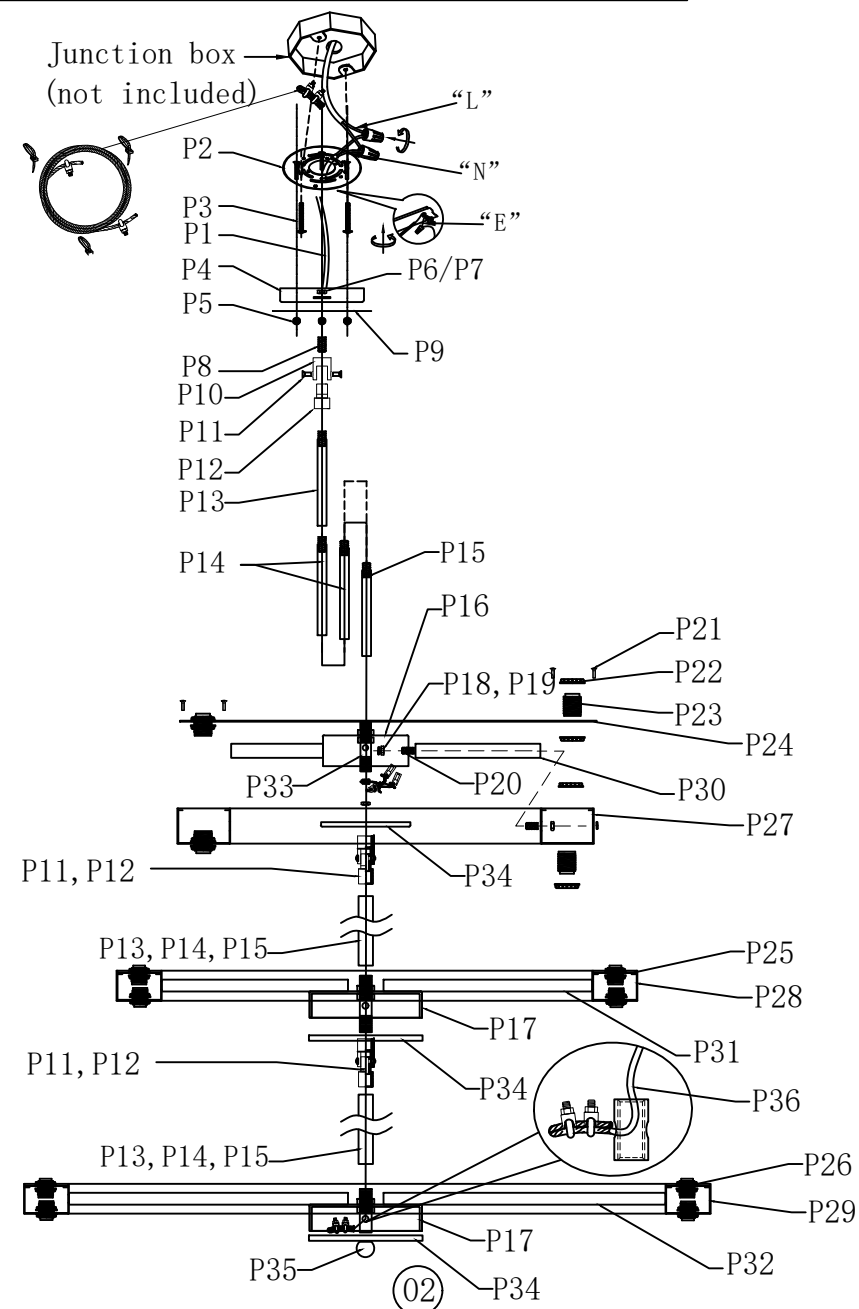
- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions. where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

①

Frame Assembly Diagram





6200G36L3BK D36" H110.5" L46

Step 1






Please use the parts list to ensure you are not missing any parts.

PARTS LIST

Part Number	Picture	Description	Qty	Diagram Number
		1/16" Threaded rod(L12")	1	ZA
		washer	2	ZB
		nut	4	ZC
		Heavy duty hickey(L1.6")	1	ZD
		Threaded pipe(L2.75")	1	ZE
Cord-75-18#-BK		Power Cord 75" SPT-2 Black	1	P1
Crossbar 6.7" (Canopy part) D7" Canopy plat (Canopy part) D8" Metal plate (Canopy part) CP3R16BK		Crossbar 6.7" (Canopy part)	1	P2
		5/32-32 Screw	2	P3
		D7" Canopy plat	1	P4
		NUT	4	P5
		Set nut	1	P6
		metal washer	1	P7
		thread pipe	1	P8
		D8"sheetmetal	1	P9
		NUT	3	P10
		Screw	2	P11
		NUT	3	P12
ROD9019BK-2		L16"metal tube(ROD9019)	3	P13
		L12"metal tube(ROD9019)	6	P14
		L6"metal tube(ROD9019)	3	P15

03


6200G36L3BK D36" H110.5" L46

Part Number	Picture	Description	Qty	Diagram Number
P-6200G36L3BK-1		D4.7" Metal Wire Box	1	P16
		D6" Metal Wire Box	2	P17
		Spring Seat	37	P18
		Set nut	37	P19
		thread pipe	37	P20
		Ground Screw	36	P21
		Socket ring	92	P22
		G9 Socket	46	P23
		D25sheetmetal	1	P24
		D32sheetmetal	1	P25
		D36sheetmetal	1	P26
		D25"Metal Body	1	P27
		D32"Metal Body	1	P28
		D36"Metal Body	1	P29
		L8.1" metal tube	5	P30
		L10.8" metal tube	6	P31
		L12.8" metal tube	6	P32
		Hickey	3	P33
		Metal cover	3	P34
		Cap nut	1	P35
		steel wire rope	1	P36
CR-6200-RC-CL-A		L12"Article crystal	224	A

04

Step 2

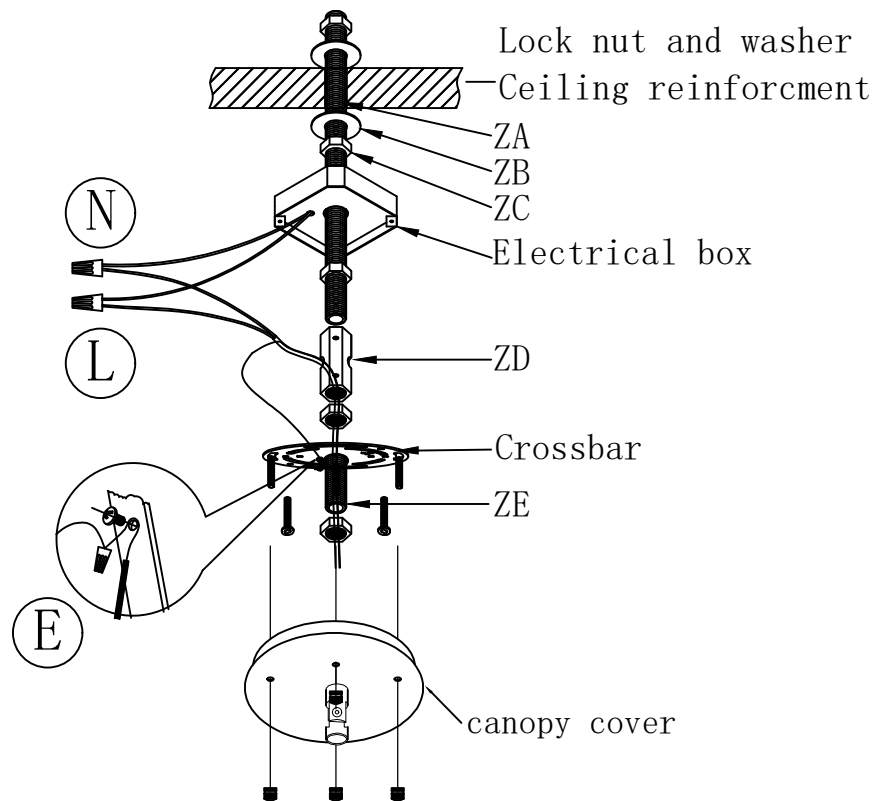Canopy installation instructions




"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire

IMPORTANT: Test sockets with bulb before dressing the fixture.

1. Drill a $\phi 0.7"$ hole in the ceiling reinforcement to allow a $\frac{1}{16}"$ threaded rod to pass through.
2. Attach the electrical box to the ceiling reinforcement and pass the $\frac{1}{16}"$ threaded rod through the box and secure it to the heavy duty hickey.
3. Pass the fixture wires and ground wire through the loop, canopy ring, center hole of canopy and the heavy duty hickey.
4. Pull ceiling wires down through the fixture box and make connection.
5. Secure mounting bracket to the junction box.
6. Fix the fixture to the mounting bracket with knurled nuts.

Important: This product must be installed in accordance with the local installation codes by a person familiar with construction and operation of this product and the hazards involved.

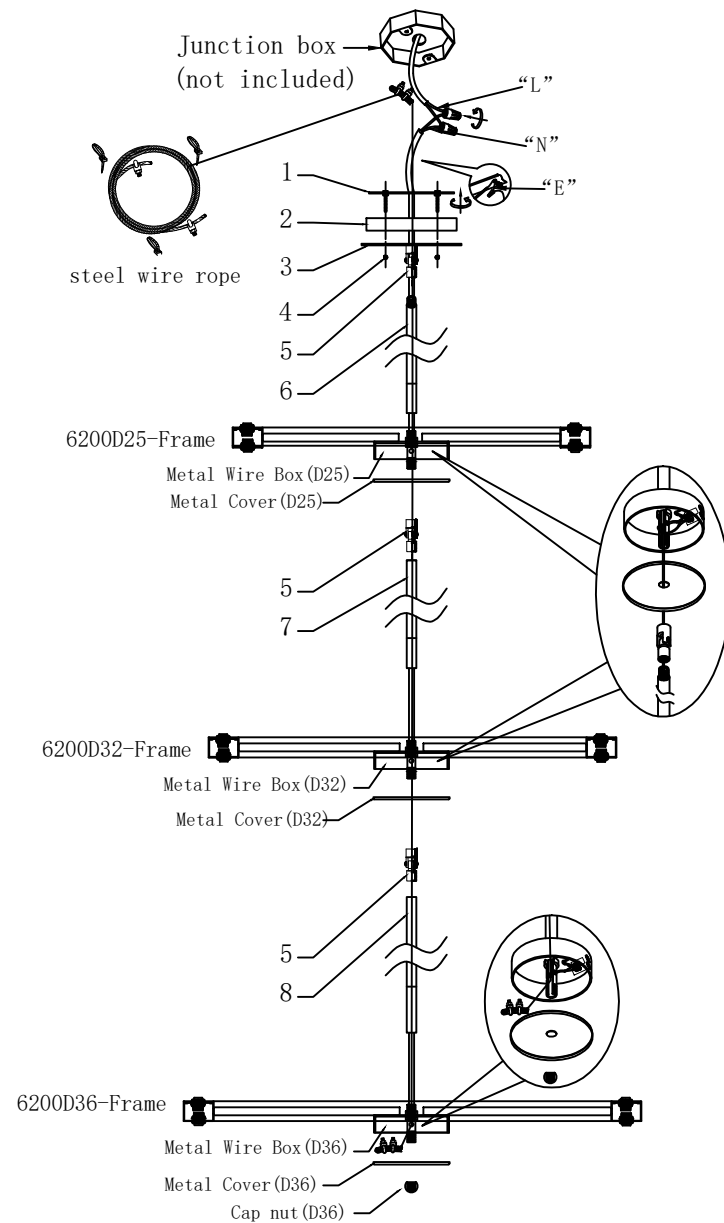1. Black wire from ceiling(junction box) attaches to "L" wire from the fixture.
2. White wire from ceiling((junction box) attaches to "N" wire from the fixture.
3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws in side of top unit the mounting bracket.



Step 3

Frame Assembly Instructions

Installation:

Please read all instructions carefully.

Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete.

Please note that each part has been assigned a number.

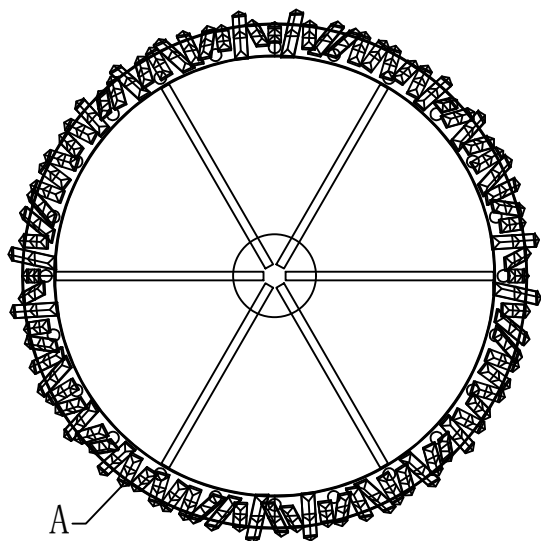
Please proceed in a numerical order.

- 1) Install the crossbar(1) on solid ceiling, And tie the wire rope.
- 2) Install the Canopy plat(2), Canopy plate(3) on the crossbar(1) by nut(4)
- 3) Install Metal tube(5"/12"*2/16") and the 6200D25 Frame on the NUT-M16(5)
- 4) Put round ball twist down and take the junction box(D25), then let the electric wire of lamp body(D25) and lamp body(D32) connect it.
- 5) Cover the junction box(D25) and use the Nut-M16(5) to twist tighten, then put the metal tube (7) twist the lamp body(D32) then connect the NUT-M16(5)
- 6) Put round ball twist down and take the junction box(D32), then let the electric wire of lamp body(D32) and lamp body(D36) connect it.
- 7) Cover the junction box(D32) and use the Nut-M16(P5) to twist tighten, then put the metal tube (P8) twist the lamp body(D36) then connect the NUT-M16(P5)
- 8) Cover the junction box(D36) and use the ball(D36) to twist tighten.
- 9) As the crystal(A) dressing instruction, hang the crystal parts.

The end!

Step 4 Crystal Dressing Instructions

1. Hang Crystal:A




09

Crystal Dressing



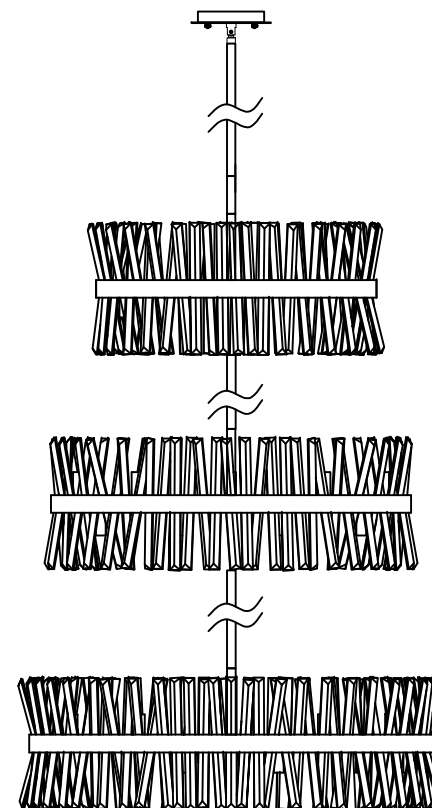When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.



10

Congratulations !

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

Cleaning and Maintenance of Chandelier Frame
The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals
Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts
Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us . For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle . You will be contacted with prices prior to shipment. All orders must be pre-paid.

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department.

A written return authorization form will be sent to you with specific instructions.

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.